

### Overview

#### Is backup power creating cost and space issues in your data center racks?

The HPE DirectFlow (DF) Uninterruptible Power System (UPS) is a scalable and modular UPS that provides a high-density backup power solution for Hewlett Packard Enterprise servers and storage. It features a separate power management unit that integrates the major stages of an UPS - charger, inverter and active filter - into a single compact unit that dramatically reduces both size and cost when compared to a traditional UPS. The DirectFlow UPS provides up to 15kVA (3U) or 19.9kVA (5U) of power, utilizing 1U (Lithium-Ion) or 3U (Valve Regulated Lead Acid) battery pack options. HPE's DirectFlow UPS technology creates a highly efficient backup power solution by removing the active front-end AC/DC power conversion steps, delivering an efficiency exceeding 99%. DirectFlow UPS technology also includes integrated Active Current Correction that enables power factor closer to unity in low-load conditions, providing clean power that ultimately lowers your power costs.

#### Power Unit (1U UPS)

**NOTE: #0D1 will appear after the part number on the sales order if HPE factory integration is indicated.**

HP R12000 DirectFlow - 1U Rackmount Uninterruptible Power System	G9Y75A
HP R12000 DirectFlow - POD 1U Rackmount Uninterruptible Power System	AF478A

#### Input/Output Module Options for 1U UPS– Choose one I/O Module per UPS

**NOTE: #0D1 will appear after the part number on the sales order if HPE factory integration is indicated.**

HP 32A 400-415 Volt Three Phase INTL R12000 DirectFlow UPS IEC309 Input/Output Module	AF488A
HP 30A 400-415 Volt Three Phase NA R10000 DirectFlow UPS IEC309 Input/Output Module	AF489A
HP 32A 380 Volt Three Phase China R12000 DirectFlow UPS Unterminated Input/Output Module	AF490A
HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 Input/Output Module	AF491A
HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	AF492A
HP 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	G9Y76A

**NOTE: All Input/Output Modules support dual output outlets except the AF484A.**

#### Power Unit (2U UPS)

**NOTE: #0D1 will appear after the part number on the sales order if HPE factory integration is indicated.**

HP R18000 DirectFlow - 2U Rackmount Uninterruptible Power System	AF479A
--	--------

#### Input/Output Module Options for 2U UPS– Choose one I/O Module per UPS

**NOTE: #0D1 will appear after the part number on the sales order if HPE factory integration is indicated.**

HP 32A 400-415 Volt Three Phase INTL R18000 DirectFlow UPS IEC309 Input/Output Module	AF483A
HP 30A 380 Volt Three Phase China R18000 DirectFlow UPS Unterminated Input/Output Module	AF485A
HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF486A
HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF487A
HP 30A 400 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	D9Q02A
HP 30A 400-415V Three Phase NA R18000 DirectFlow UPS 1:1 IEC309 Input/Output Module	AF484A

**NOTE: All Input/Output Modules support dual output outlets except the AF484A.**


#### Battery Pack Options - Choose up to two Battery Packs per UPS (must be the same)

**NOTE: #0D1 will appear after the part number on the sales order if HPE factory integration is indicated.**

HP DirectFlow UPS - 1U Rackmount Lithium-ion Battery Pack	AF480A
HP DirectFlow UPS - 3U Rackmount VRLA Battery Pack	AF482A


## Overview

## HPE R12000 DirectFlow UPS (front panel)

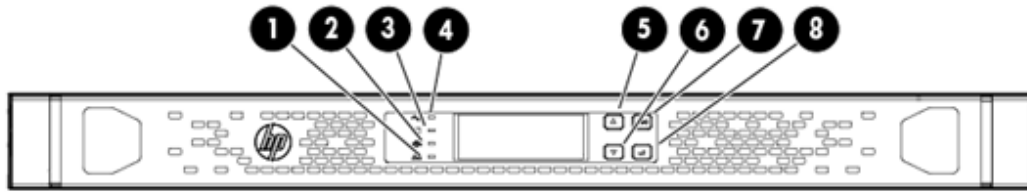

- |   |                  |   |                            |
|---|------------------|---|----------------------------|
| 1 | UPS fault LED    | 5 | Up arrow                   |
| 2 | Bypass mode LED  | 6 | Down arrow                 |
| 3 | Battery mode LED | 7 | Off/ESC/Clear fault button |
| 4 | Input LED        | 8 | On/Enter button            |


## HPE R12000 DirectFlow UPS (rear panel)

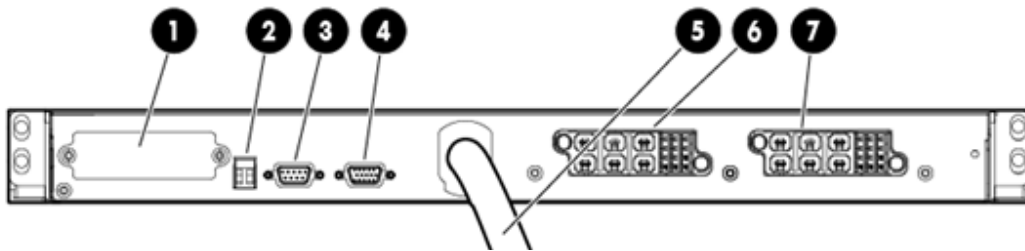

- |   |                                     |   |                             |
|---|-------------------------------------|---|-----------------------------|
| 1 | Cover plate for option slot         | 5 | Battery pack power cable    |
| 2 | REPO port                           | 6 | I/O power module connection |
| 3 | DB-9 serial port (firmware upgrade) | 7 | I/O power module connection |
| 4 | DB-15 port (CAN Bus cable)          |   |                             |


## Overview

### HPE R12000 DirectFlow UPS (rear panel with UPS Management Card and I/O Module installed)

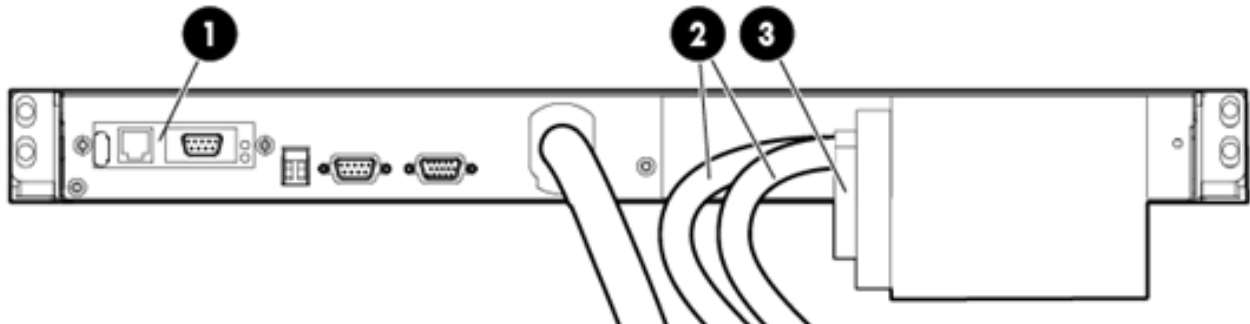

- 1 HPE DirectFlow UPS Management Module card
- 2 HPE DirectFlow Input/Output Power Module switch
- 3 HPE DirectFlow Input/Output Power Module connection and cables


### HPE R12000 DirectFlow UPS (rear panel with UPS Management Card installed, no I/O module)

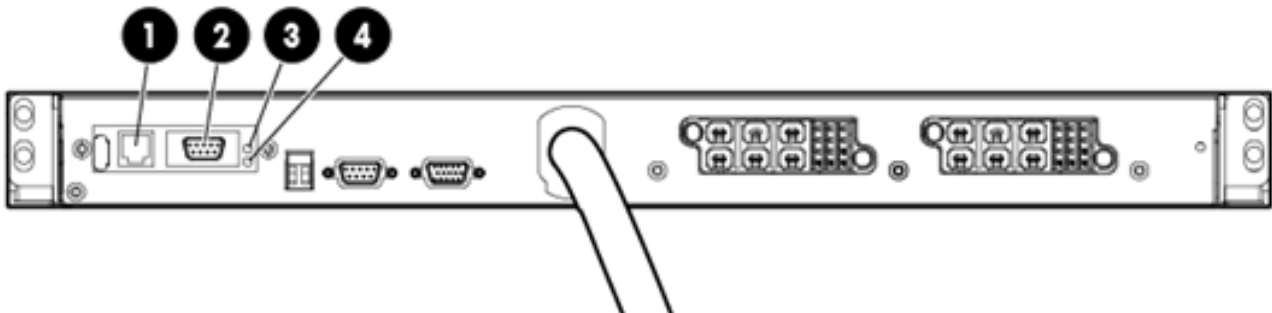

- 1 RJ-45 for network or Ethernet communications
- 2 DB-9 serial port for configuration and flashing card firmware
- 3 Power LED
- 4 Health/Alert LED


Overview

HPE R18000 DirectFlow UPS (front panel)

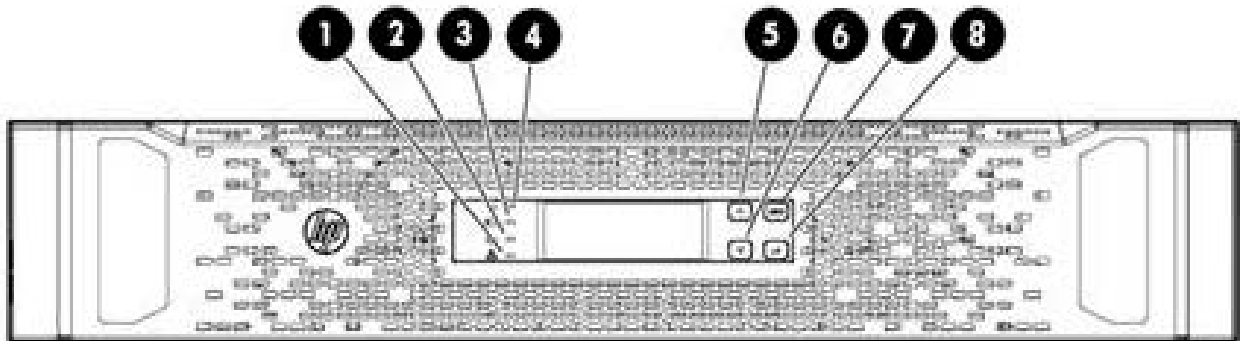

- |   |                  |   |                            |
|---|------------------|---|----------------------------|
| 1 | UPS fault LED    | 5 | Up arrow                   |
| 2 | Bypass mode LED  | 6 | Down arrow                 |
| 3 | Battery mode LED | 7 | Off/ESC/Clear fault button |
| 4 | Input LED        | 8 | On/Enter button            |


HPE R18000 DirectFlow UPS (rear panel)

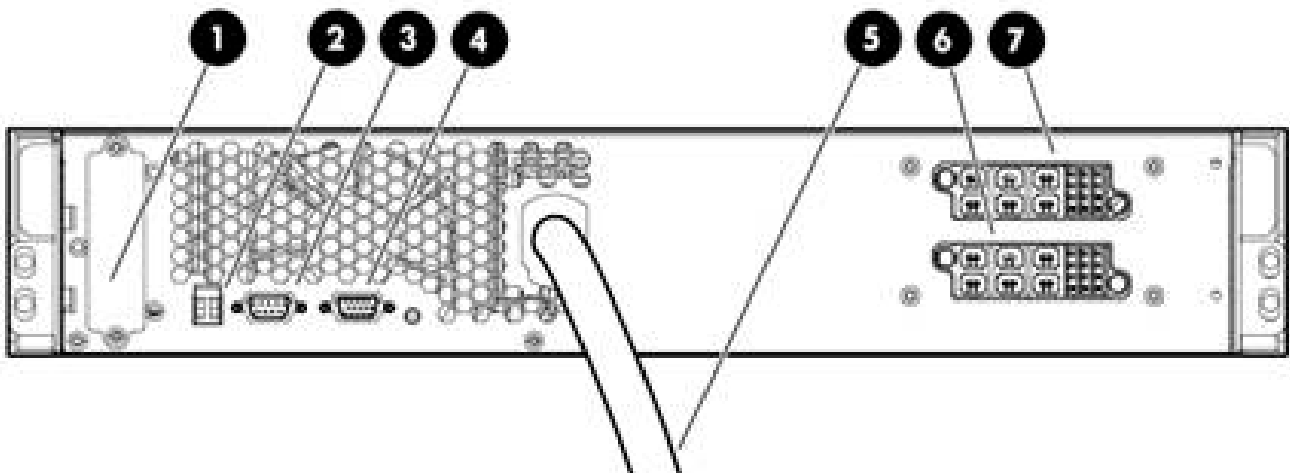

- |   |                                     |   |                             |
|---|-------------------------------------|---|-----------------------------|
| 1 | Cover plate for option slot         | 5 | Battery pack power cable    |
| 2 | REPO port                           | 6 | I/O power module connection |
| 3 | DB-9 serial port (firmware upgrade) | 7 | I/O power module connection |
| 4 | DB-15 port (CAN Bus cable)          |   |                             |


## Overview

**HPE R18000 DirectFlow UPS**  
(rear panel with UPS Management Card and I/O Module installed)

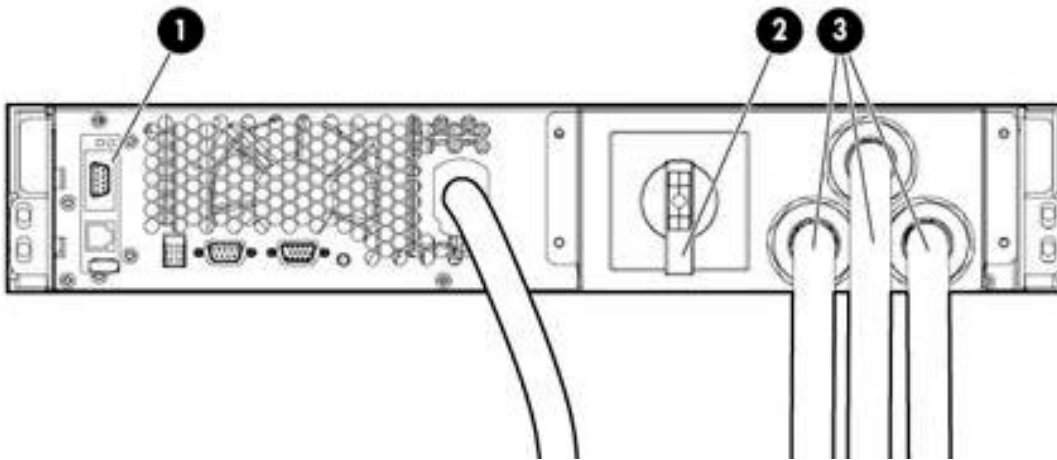


- 1 UPS Management Module card
- 2 Input/Output Power Module switch
- 3 Input/Output Power Module connection and cables

**HPE R18000 DirectFlow UPS**  
(rear panel with UPS Management Card installed, no I/O module)

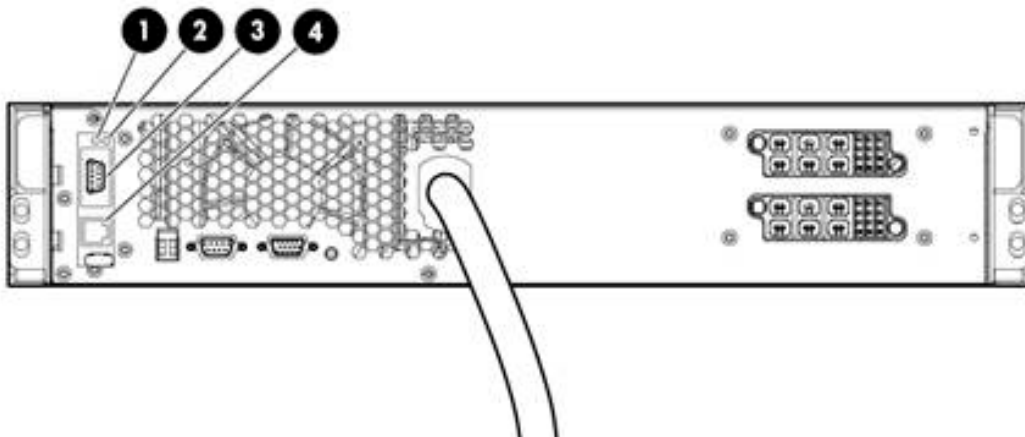


- 1 Power LED
- 2 Health/Alert LED
- 3 DB-9 serial port (configuration/firmware upgrade)
- 4 RJ-45 (Network/Ethernet communications)

## Overview

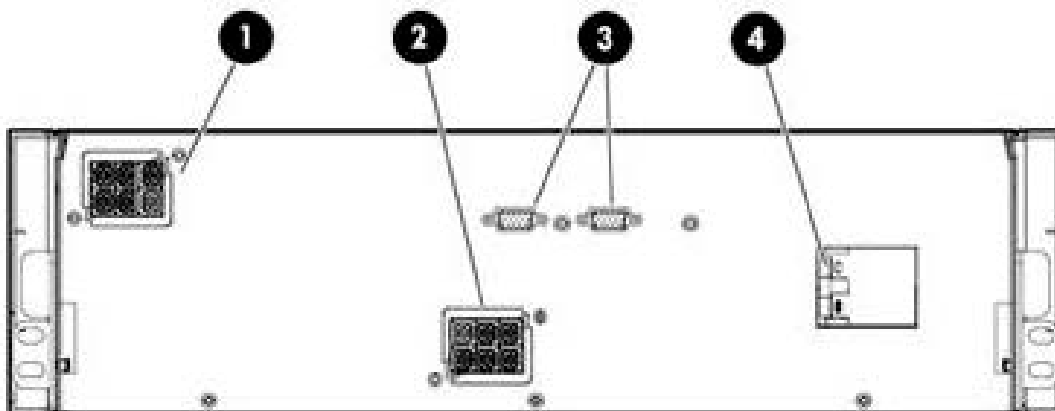**3U Battery Pack (VRLA)**

- 1 DC to DC power cable connector (power unit)
- 2 DC to DC power cable connector (battery pack)
- 3 DB-15 ports (CAN Bus cables for battery pack communication)
- 4 Circuit breaker switch

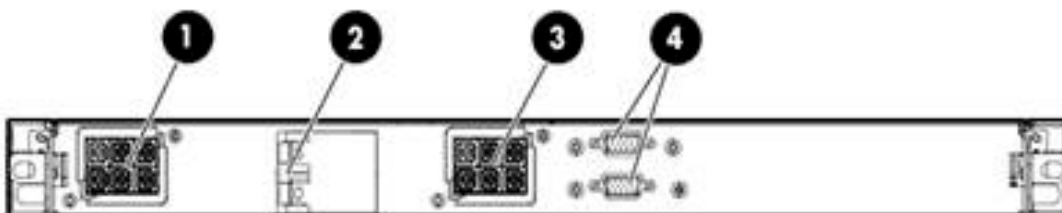**1U Battery Pack (Li-ion)**

- 1 DC to DC power cable connector (power unit)
- 2 Circuit breaker switch
- 3 DC to DC power cable connector (battery pack)
- 4 DB-15 ports (CAN Bus cables for battery pack communication)

## Standard Features

### Key Features and Benefits

#### Modular And Scalable Design Creates High Density Backup Power Solution

- Separate power management unit that integrates the major stages of an UPS - charger, inverter and active filter - into a single compact unit that dramatically reduces both size and cost when compared to a traditional UPS
- High power density solution that provides up to 19.9kVA in a 5U space and as much as 12kVA in a 2U space
- Increase system runtime by 3x with parallel able 1U (Lithium-Ion) and 3U (Valve Regulated Lead Acid) battery pack options
- Modular input/output modules accommodate different regional input voltage requirements using the same power management unit and battery options worldwide

#### Highly Efficient Backup Power Solution That Lowers Your Total Cost Of Ownership

- Utilizes an advanced technology that removes the active front-end AC/DC power conversion steps and delivers power efficiency exceeding 99%
- Integrates Active Current Correction (ACC) technology that enables power factor closer to unity in low-load conditions, ultimately lowering the data center power bill
- Utilizes Digital Signal Processing (DSP) technology that continually conditions and regulates power without using the battery, thereby increasing the life of the battery

#### Flexible Design Allows for Simple Configuration, Management, and Maintenance

- Easy configuration and user-friendly operation supported through an enhanced LCD display and remote web-based management capabilities
- Separation of power management unit and battery creates a distributed backup power solution with no single point of failure
- Hot-swappable power management unit and battery modules that include a Modular Bypass mode that allows loads to be continuously powered while servicing the UPS

---

### High Power Density

Up to 6kVA of power per U of rack space:

- 19.9kVA in 5U space = 2U DirectFlow UPS + 3U VRLA Battery option
- 15kVA in 3U space = 2U DirectFlow UPS + 1U Li-Ion Battery option
- 12kVA in 2U space = 1U DirectFlow UPS + 1U Li-Ion Battery option

---

### Innovative Technology Drives Lower TCO

- HPE DirectFlow technology creates a highly efficient backup power solution by removing the active front-end AC/DC power conversion steps, delivering an efficiency exceeding 99%
- Integrated Active Current Correction technology enables power factor closer to unity in low-load conditions, providing clean power that ultimately lowers your power costs
- Includes HPE exclusive battery management software that helps to extend the service life of the battery

---

### Better Reliability

- Innovative design enables efficient management of unbalanced loads
  - Able to detect and handle generator input on programming, making efficient use of available power for load and charging when required
  - Programmable runtime limits, input types, and charging output power
-

---

## Standard Features

**HPE Battery Management**

The DirectFlow UPS communicates with the battery management system to learn the voltages and states of charge for each battery module. This helps the UPS to better understand the condition and usability of the battery, and informs the user when it is time for the battery to be serviced.

---

**UPS/Battery Monitoring**

The DirectFlow UPS provides both a serial communications port (RS232) and CAN bus for local connection to the UPS and battery modules. Remote monitoring is also supported via two methods:

- Optional UPS Management Card (internal)
  - Optional Advanced Power Manager (APM) Kit (external)
- 

**Compatibility**

Compatible with all HPE V142, 11000G2 and Intelligent Series Racks, as well as with all HPE Power Distribution Units (PDUs), servers, networking and storage products.

---

**Warranty**

HPE R12000 and R18000 DirectFlow UPS and I/O Module options: covered by a three year warranty (3/1/1), with the first year including parts and labor.

HPE DirectFlow 1U Battery Module (Li-Ion): covered by a four year warranty (4/1/1), with the first year including parts and labor.

HPE DirectFlow 3U Battery Module (VRLA): covered by a two year warranty (2/1/1), with the first year including parts and labor.



## Service and Support

### Service and Support

**NOTE:** HPE DirectFlow 1U Uninterruptible power system is supported as a part of the HPE Server Infrastructure. No separate HPE Care Packs needs to be purchased. The Support recommendation listed below are only for the 2U UPS.

#### **HPE Technology Services for Industry Standard Servers**

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HPE to help prevent problems and solve issues faster. Our support technology lets you to tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.

#### **Protect your business beyond warranty with HPE Care Pack Services**

HPE Care Pack Services enable you to order the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement for the term you select.

### Recommended HPE Care Pack Services for 2U Uninterruptible Power System

#### Optimized Care

##### **Supports maintaining servers at optimum performance availability**

#### **HPE Proactive Care Advanced – Call to Repair, three year Care Pack Service**

Achieve a higher return on your product investment with the personal attention from a locally assigned Account Support Manager who delivers recommendations designed to improve availability and performance. Leverage your system's ability to connect to HPE for automated problem detection and rapid critical event management to increase stability and reduce unplanned downtime. This recommendation provides a local customer engineer for onsite hardware repair if required within 6 hours and two-hour callback for supported software. Collaborative call management comes with Proactive Care Advanced or you may choose full support from HPE where we own all cases through to resolution.

<https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA5-3259ENW&cc=us&lc=en>

#### Standard Care

##### **Supports maintaining high level of server availability**

#### **HPE Proactive Care with 6 hour call-to-repair commitment, three year Care Pack Service**

HPE Proactive Care helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to HPE. This Care Pack Service combines three years' proactive reporting and advice with our highest level reactive coverage and enhanced escalation management, HPE's 24x7, six hour call-to-repair hardware commitment. Hewlett Packard Enterprise is the only leading manufacturer who makes this level of coverage available as a standard service offering for your most valuable servers. Service includes 24x7 collaborative software support for leading industry standard software running on your HPE ProLiant server.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

#### Basic Care

##### **Supports maintaining minimum level of server availability**

#### **Foundation Care 24x7, three-year Care Pack Service**

HPE Foundation Care 24x7 connects you to HPE 24 hours a day, seven days a week for assistance on resolving issues. Hardware onsite response within four hours if needed; collaborative software included in this Care Pack service provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make HPE your first call for hardware or software questions.

<https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>

**Get connected to HPE to** Connecting products to Hewlett Packard Enterprise will help prevent problems with 24x7 monitoring,

## Service and Support

### **improve your support experience**

prefailure alerts, automatic call logging, and parts dispatch, plus current data will be available for the proactive reports that are part of Proactive Care Services. With Connected products, you can have a dashboard to manage your IT anywhere, anytime, from any device.

### **Parts and materials**

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements. Supplies and consumable parts will not be provided as part of this service; standard warranty terms and conditions apply. Parts and components that have exceeded their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual or the technical product data sheet will not be provided, repaired or replaced as part of this service.

### **Coverage**

Coverage of the UPS battery is not included beyond the term of the UPS warranty; standard warranty terms and conditions apply.

### **For more information**

To learn more on services for HPE ESSN Options, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. Or visit: <http://www.hp.com/services/proliant> or <http://www.hp.com/services/bladessystem>

## Related Options

### HPE DirectFlow UPS Options

**NOTE:** #0D1 will appear after the part number on the sales order if HPE factory integration is indicated.

<b>HPE DirectFlow UPS</b>	HP DirectFlow UPS - 1U Rackmount Lithium-ion Battery Pack	AF480A
<b>Battery Options</b>	HP DirectFlow UPS - 3U Rackmount VRLA Battery Pack	AF482A

**NOTE:** Primary and secondary batteries used in the DirectFlow UPS must be the same type.

---

<b>R12000 1U I/O Module Options</b>	HP 32A 400-415 Volt Three Phase INTL R12000 DirectFlow UPS IEC309 Input/Output Module	AF488A
	HP 30A 400-415 Volt Three Phase NA R10000 DirectFlow UPS IEC309 Input/Output Module	AF489A
	HP 32A 380 Volt Three Phase China R12000 DirectFlow UPS Unterminated Input/Output Module	AF490A
	HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 Input/Output Module	AF491A
	HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	AF492A
	HP 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	G9Y76A

---

<b>R18000 2U I/O Module Options</b>	HP 32A 400-415 Volt Three Phase INTL R18000 DirectFlow UPS IEC309 Input/Output Module	AF483A
	HP 30A 380 Volt Three Phase China R18000 DirectFlow UPS Unterminated Input/Output Module	AF485A
	HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF486A
	HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF487A
	HP 30A 400 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	D9Q02A
	HP 30A 400-415V Three Phase NA R18000 DirectFlow UPS 1:1 IEC309 Input/Output Module	AF484A

**NOTE:** All Input/Output Modules support dual output outlets except the AF484A.

---

<b>Secondary Battery Cable</b>	HP WW DirectFlow Secondary Battery Cable	AF497A
--------------------------------	--	--------

**NOTE:** Required when adding a secondary battery to either the R12000 or R18000 DirectFlow UPS.

---

<b>UPS Management Card (Internal)</b>	HP DirectFlow UPS Management Card	AF493A
<b>UPS Management Card (External)</b>	HP SL Advanced Power Manager Kit	538084-B21

**NOTE:** HPE Comm Micro DB9F/DB9M Cable (E2D31A) required when using this external UPS management card.

<b>External UPS Management Cable Kit</b>	HP Communication Micro DB9 Female to DB9 Male Black 3.0m 1-pack Serial Cable	E2D31A
--	--	--------

**NOTE:** Cable kit required when HPE SL Advanced Power Manager Kit (538084-B21) is used with R18000 UPS.

## Maximum Output Power

UPS Model	Input/Output Module	Max Power (kVA) - VRLA Battery	Max Power (kVA) Li-Ion Battery
<b>HPE R12000 1U Direct Flow UPS</b>	HPE 32A 400-415 Volt Three Phase INTL R12000 DirectFlow UPS IEC309 Input/Output Module	12000	12000
	HPE 30A 400V NA R12000DF IEC309 POD Mod	12000	12000
	HPE 32A 380 Volt Three Phase China R12000 DirectFlow UPS Unterminated Input/Output Module	12000	12000
	HPE 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 Input/Output Module	12000	12000
	HPE 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	12000	12000
	HPE 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	12000	12000
<b>HPE R18000 2U Direct Flow UPS</b>	HPE 32A 400-415 Volt Three Phase INTL R18000 DirectFlow UPS IEC309 Input/Output Module	19900	15000
	HPE 30A 380 Volt Three Phase China R18000 DirectFlow UPS Unterminated Input/Output Module	19900	15000
	HPE 30A 480 Volt Three Phase NA R18000 DirectFlow UPS L22-30 Input/Output Module	19900	15000
	HPE 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	19900	15000
	HPE 30A 400 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	19900	15000
	HPE 30A 400-415V Three Phase NA R18000 DirectFlow UPS 1:1 IEC309 Input/Output Module	19900	15000

**Estimated Runtime (Minutes)**

<b>R12000 Runtime with 3U VRLA Battery Pack</b>			
<b>Load (kVA)</b>	<b>Load % (3UBP)</b>	<b>Minimum Minutes (1 B:P)</b>	<b>Minimum Minutes (2 BPs Parallel)</b>
12	100	4:21	12:53
9	75	6:56	19:04
6	50	11:25	31:32
3	25	29:35	71:22

<b>R18000 Runtime with 3U VRLA Battery Pack</b>			
<b>Load (kVA)</b>	<b>Load % (3UBP)</b>	<b>Minimum Minutes (1 B:P)</b>	<b>Minimum Minutes (2 BPs Parallel)</b>
4.5	25.00	13	42
9	50.00	7	18
12	66.67	4	13
13.5	75.00	4	11
15	83.33	3	10
17.7	98.33	2	8
18	100.00	2	7

<b>R18000 Runtime with 1U Lithium Ion Battery Pack</b>			
<b>Load (kVA)</b>	<b>Load % (1UBP)</b>	<b>Minimum Minutes (1 BP)</b>	<b>Minimum Minutes (2 BPs Parallel)</b>
3.75	25	9	21
7.5	50	5	10
11.25	75	2	6
12	80	2	6
15	100	1	5

**NOTE:** Runtimes may change based on aging of the batteries and ambient temperature. Runtimes shown here are conservative values based on test results.

## Technical Specifications

### HPE R12000 DirectFlow 1U UPS

<b>BTU Break Down Based on efficiency of unit on battery</b>	<b>BTU On Battery with VRLA Battery Option</b>	AC Mode Efficiency = 0.94 DC Mode Efficiency = 0.91 Output Power = 12000 W AC Mode without charging = 2611.91 BTU/hr Battery Mode = 4047.03 BTU/hr
	<b>BTU On Battery with Li-Ion Battery Option</b>	AC Mode Efficiency = 0.94 DC Mode Efficiency = 0.90 Output Power 12000W AC Mode without charging = 2611.11 BTU/hr. Battery Mode = 4546.67 BTU/hr.
	<b>Battery String Voltage</b>	432V (VRLA), 376V (Li-Ion)
	<b>Battery Type</b>	12V 3.5Ah (VRLA), 4.1V, 1.5Ah (Li-Ion)
	<b>Battery Quantity</b>	4 strings with 9 batteries per string (VRLA) per battery tray, 8 modules in series with 12 2-parallel cells in series (Li-Ion) per battery tray.
<b>Electrical Input</b>	<b>Voltage Range</b>	480/415/400/380V +10/-15% (Wye)
	<b>Frequency</b>	50/60 Hz
	<b>Input Plug</b>	I/O module with IEC 309 32P/ IEC 309 32R, IEC 309 20P, IEC 309 20R, NEMA L22 30P/ NEMA L22 30C plug depending on operating voltage. The I/O module has one input plug and one output receptacle.
	<b>Online Efficiency</b>	>94%
	<b>REPO</b>	Remote Emergency Power-Off disables AC power to load
<b>Electrical Output</b>	<b>Voltage Range</b>	480/415/400/380V Wye Line to Line (277/240/230/220V Wye Line to Neutral)
	<b>Online Regulation</b>	±5% of nominal voltage
	<b>On-Battery Regulation</b>	±5% of nominal voltage
	<b>Voltage Wave Form</b>	Sine wave
	<b>Connections</b>	I/O module with IEC 309 32P/ IEC 309 32R, IEC 309 20P, IEC 309 20R, NEMA L22 30P/ NEMA L22 30C plug depending on operating voltage. The I/O module has one input plug and one output receptacle.
	<b>Output Protection</b>	Overcurrent and short circuit protection through output current feedback. Inverter and output SCRs, Inverter fuses.
<b>Battery</b>	<b>Type</b>	Maintenance-free, sealed, valve-regulated lead acid (VRLA); Lithium-Ion Phosphate (Li-Ion)
	<b>Extended Batteries</b>	Up to two battery packs in parallel supported – must be the same type of battery
	<b>Backup Time</b>	See Estimated Runtime chart
	<b>Recharge Time</b>	<1 hours to 80% usable capacity; <4 hours for complete recharge for Li-Ion; <3 hours to 80% and <24 hours for complete recharge for VRLA batteries
	<b>Battery Voltage</b>	432V (VRLA), 376V (Li-Ion)
	<b>Battery Type</b>	12V 3.5Ah (VRLA), 4.1V, 1.5Ah (Li-Ion)
	<b>Battery Quantity</b>	4 strings with 9 batteries per string (VRLA) per battery tray; 8 modules in series with 12 2-parallel cells in series (Li-Ion) per battery tray.
<b>Maximum Power</b>	<b>With VRLA Battery</b>	12000VA
	<b>With Li-Ion Battery</b>	12000VA

## Technical Specifications

<b>Communications</b>	<b>Serial Ports</b>	Standard DB-9 port and DB-15 CAN port
	<b>Optional</b>	HPE UPS Management Module Card (Internal) HPE Advanced Power Manager (External)
<b>Environmental and Safety</b>	<b>LCD/LED Indicators</b>	LCD screen with two scroll buttons, one ESC and one RETURN button. 4 LEDs (AC Input On, Battery Mode On, Manual Bypass On, and Fault)
	<b>Operating Temperature</b>	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8F° per every 1000 ft.) above sea level to a maximum of 3050 m (10,000 ft.), no direct sustained sunlight. Maximum rate of change is 10°C/hr. (18°F/hr.). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F). <b>NOTE: Operating temperature assumes rated load and nominal utility.</b>
	<b>Transit Temperature</b>	-25° to 60° C
	<b>Storage Temperature</b>	-25° to 55° C
	<b>Operating Humidity</b>	5 - 95 %, Non-condensing
	<b>Storage Humidity</b>	5 - 95 %, Non-condensing
	<b>Operating Altitude</b>	10,000 ft. above sea level
	<b>Transit Altitude</b>	30,000 ft. above sea level
	<b>Safety Markings</b>	NA: UL, cUL International: TUV, CE
	<b>Safety Certifications</b>	UL1778, UL60950-1; CSA22.2 No.107.3-05, EN60950-1 IEC62040-1
	<b>EMC Markings</b>	NA/JPN: FCC, VCCI, ICES, CISPR International: CISPR
	<b>Emissions</b>	FCC CFR 47, Part 15 Class A, ; EN62040-2
	<b>REPO Port</b>	Meets NEC code 645-11 intent and UL requirements
	<b>Status Indicator</b>	<b>On/Enter button</b>
<b>UPS fault LED</b>		Red light indicates a fault; no light indicates proper function
<b>Bypass mode LED</b>		Green light indicates Bypass mode; no light indicates AC mode
<b>Battery mode LED</b>		Yellow light indicates Battery mode; flashing indicates low battery
<b>Input LED</b>		Green light indicates that the power input is adequate
<b>Off/ESC/Clear fault button</b>		<ul style="list-style-type: none"> <li>• In AC mode, press the button for 3 seconds to transfer the UPS to Bypass mode; in Battery mode, press for 3 seconds to shut down the UPS output</li> <li>• During menu selection, press the button to go back to the previous menu</li> <li>• During a UPS fault, press the button for 3 seconds to clear the fault and transfer the UPS to Bypass mode</li> </ul>
<b>Kit Contents</b>	<b>Power Unit (UPS)</b>	HPE R12000 DirectFlow 1U UPS unit; documentation; depth adjustable fixed rack mounting rails, mounting brackets; Front bezel
	<b>I/O Modules</b>	HPE DirectFlow 1U I/O Module; documentation

## HPE R18000 DirectFlow 2U UPS

<b>BTU Break Down Based on efficiency of unit on battery</b>	<b>BTU On Battery with VRLA Battery Option</b>	AC Mode Efficiency = 0.98 DC Mode Efficiency = 0.91 Output Power = 19944 W AC Mode without charging = 1388 BTU/hr Battery Mode = 6726 BTU/hr
--	--	--

## Technical Specifications

	<b>BTU On Battery with Li-Ion Battery Option</b>	AC Mode Efficiency = 0.98 DC Mode Efficiency = 0.90 Output Power 15000W AC Mode without charging = 1044 BTU/hr. Battery Mode = 5683 BTU/hr.
	<b>Battery String Voltage</b>	432V (VRLA), 376V (Li-Ion)
	<b>Battery Type</b>	12V 3.5Ah (VRLA), 4.1V, 1.5Ah (Li-Ion)
	<b>Battery Quantity</b>	4 strings with 9 batteries per string (VRLA) per battery tray, 8 modules in series with 12 2-parallel cells in series (Li-Ion) per battery tray.
<b>Electrical Input</b>	<b>Voltage Range</b>	480/415/380V +10/-15% (Wye)
	<b>Frequency</b>	50/60 Hz
	<b>Input Plug</b>	I/O module with IEC 309 32P/ IEC 309 32R, IEC 309 20P, IEC 309 20R, NEMA L22 30P/ NEMA L22 30C plug depending on operating voltage. The I/O module has one input plug and one output receptacle.
	<b>Online Efficiency</b>	>97%
	<b>REPO</b>	Remote Emergency Power-Off disables AC power to load
<b>Electrical Output</b>	<b>Voltage Range</b>	480/415/380V +10/-15% (Wye)
	<b>Online Regulation</b>	±5% of nominal voltage
	<b>On-Battery Regulation</b>	±5% of nominal voltage
	<b>Voltage Wave Form</b>	Sine wave
	<b>Connections</b>	I/O module with IEC 309 32P/ IEC 309 32R, IEC 309 20P, IEC 309 20R, NEMA L22 30P/ NEMA L22 30C plug depending on operating voltage. The I/O module has one input plug and one output receptacle.
	<b>Output Protection</b>	Overcurrent and short circuit protection through output current feedback. Inverter and output SCRs, Inverter fuses.
<b>Battery</b>	<b>Type</b>	Maintenance-free, sealed, valve-regulated lead acid (VRLA); Lithium-Ion Phosphate (Li-Ion)
	<b>Extended Batteries</b>	Up to two battery packs in parallel supported – must be the same type of battery
	<b>Backup Time</b>	See Estimated Runtime chart
	<b>Recharge Time</b>	<1 hours to 80% usable capacity; <4 hours for complete recharge for Li-Ion; <3 hours to 80% and <24 hours for complete recharge for VRLA batteries
	<b>Battery Voltage</b>	432V (VRLA), 376V (Li-Ion)
	<b>Battery Type</b>	12V 3.5Ah (VRLA), 4.1V, 1.5Ah (Li-Ion)
	<b>Battery Quantity</b>	4 strings with 9 batteries per string (VRLA) per battery tray; 8 modules in series with 12 2-parallel cells in series (Li-Ion) per battery tray.
<b>Maximum Power</b>	<b>With VRLA Battery</b>	19900VA
	<b>With Li-Ion Battery</b>	15000VA
<b>Communications</b>	<b>Serial Ports</b>	Standard DB-9 port and DB-15 CAN port
	<b>Optional</b>	HPE UPS Management Module Card (Internal) HPE Advanced Power Manager (External)
	<b>LCD/LED Indicators</b>	LCD screen with two scroll buttons, one ESC and one RETURN button. 4 LEDs (AC Input On, Battery Mode On, Manual Bypass On, and Fault).
<b>Environmental and Safety</b>	<b>Operating Temperature</b>	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8F° per every 1000 ft.) above sea level to a maximum of 3050 m (10,000 ft.), no direct sustained sunlight. Maximum rate of change is 10°C/hr. (18°F/hr.). The upper limit may be limited by the type and number of options installed. System performance may be reduced if



## Technical Specifications

operating with a fan fault or above 30°C (86°F).

**NOTE:** Operating temperature assumes rated load and nominal utility.

	<b>Transit Temperature</b>	-25° to 60° C
	<b>Storage Temperature</b>	-25° to 55° C
	<b>Operating Humidity</b>	5 - 95 %, Non-condensing
	<b>Storage Humidity</b>	5 - 95 %, Non-condensing
	<b>Operating Altitude</b>	10,000 ft. above sea level
	<b>Transit Altitude</b>	30,000 ft. above sea level
	<b>Safety Markings</b>	NA: UL, cUL International: TUV, CE
	<b>Safety Certifications</b>	UL1778, UL60950-1; CSA22.2 No.107.3-05, EN60950-1 IEC62040-1
	<b>EMC Markings</b>	NA/JPN: FCC, VCCI, ICES, CISPR International: CISPR
	<b>Emissions</b>	FCC CFR 47, Part 15 Class A, ; EN62040-2
	<b>REPO Port</b>	Meets NEC code 645-11 intent and UL requirements
<b>Status Indicator</b>	<b>On/Enter button</b>	Press the button for 3 seconds to turn the UPS on; press the button to confirm setup or menu entries
	<b>UPS fault LED</b>	Red light indicates a fault; no light indicates proper function
	<b>Bypass mode LED</b>	Green light indicates Bypass mode; no light indicates AC mode
	<b>Battery mode LED</b>	Yellow light indicates Battery mode; flashing indicates low battery
	<b>Input LED</b>	Green light indicates that the power input is adequate
	<b>Off/ESC/Clear fault button</b>	<ul style="list-style-type: none"> <li>• In AC mode, press the button for 3 seconds to transfer the UPS to Bypass mode; in Battery mode, press for 3 seconds to shut down the UPS output</li> <li>• During menu selection, press the button to go back to the previous menu</li> <li>• During a UPS fault, press the button for 3 seconds to clear the fault and transfer the UPS to Bypass mode</li> </ul>
<b>Kit Contents</b>	<b>Power Unit (UPS)</b>	HPE R18000 DirectFlow 2U UPS unit; documentation; depth adjustable fixed rack mounting rails, mounting brackets; Front bezel
	<b>I/O Modules</b>	HPE DirectFlow 2U I/O Module; documentation

<b>Environment-friendly Products and Approach</b>	<b>End-of-life Management and Recycling</b>	<p>Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a>. To recycle your product, please go to: <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a> or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.</p>
---	---	---

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HEWLETT PACKARD ENTERPRISE OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

## Summary of Changes

Date	Version History	Action	Description of Change
9-Sep-2016	From Version 3 to 4	Changed	Technical Specifications section was revised.
11-Dec-2015	From Version 2 to 3	Changed	Technical Specifications for eh HPE R12000 DirectFlow 1U UPS were revised.
09-Feb-2015	From Version 1 to 2	Changed	Overview, Standard Features, Service and Support, Related Options, Maximum Output Power, Estimated Runtime (Minutes), and Technical Specifications sections were revised.  Title was changed from DirectFlow Uninterruptible Power System to HPE DirectFlow Three Phase Uninterruptible Power System.



Sign up for updates



**Hewlett Packard  
Enterprise**

© Copyright 2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

c04376695 - 15068 - Worldwide - V4 - 9-September-2016