


Overview

HPE FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter

The HPE FlexFabric 10Gb 2-port 534FLR-SFP+ adapter is a fully featured Ethernet NIC that also support iSCSI and FCoE storage offloads if required. This adapter features the next generation of 10Gb Ethernet offering in a single chip solution on a FlexibleLOM form factor, further reducing power requirements for 2 ports of 10Gb Ethernet. It is designed for use with HPE ProLiant Gen8 and Gen9 servers.

For more effective utilization of the 10GbE bandwidth, the HPE 534FLR-SFP+ Adapter offers Switch Independent Network Partitioning (NPAR) which enables segmentation of each 10GbE port into four virtual ports, with flexible allocation of bandwidth to each port. Allowing IT organizations to improve resource utilization while lowering infrastructure and operational costs.

The HPE 534FLR-SFP+ supports enterprise class features such as VLAN tagging, adaptive interrupt coalescing, MSI-X, NIC teaming (bonding), Tunnel offloads (NVGRE, VXLAN), TCP/Ip Stateless Offloads, Receive Side Scaling (RSS), jumbo frames and PXE boot. It also supports virtualization features such as SR-IOV VMware NetQueue and Microsoft VMQ

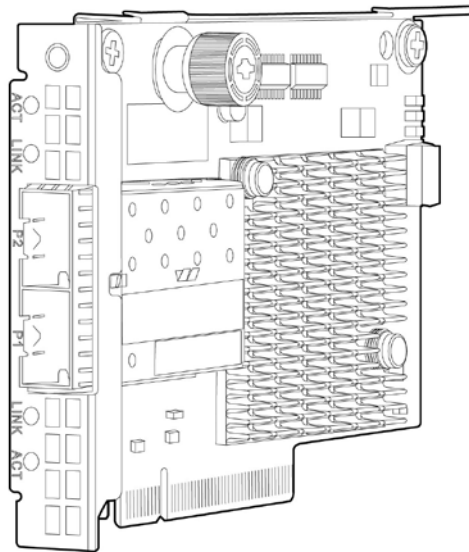

Models

HPE FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter

700751-B21

HPE FlexFabric 10Gb 2-port 534FLR-SFP+ FIO Adapter

700752-B21

Kit Contents

- HPE Ethernet 10Gb 2-port 534FLR-SFP+ Adapter
- Quick install card
- Product warranty statement

Compatibility

Servers

- DL20 Gen9
- DL60 Gen9
- DL80 Gen9
- DL120 Gen9
- DL160 Gen9
- DL180 Gen9
- DL360 Gen9
- DL380 Gen9
- DL560 Gen9
- DL580 Gen9

- Apollo 2000 XL170r Gen9
- Apollo 2000 XL190r Gen9
- Apollo 4200 Gen9
- Apollo 4500-XL450 Gen9
- Apollo 6000 XL230a Gen9
- Apollo 6000 XL230b Gen9
- Apollo 6000 XL250a Gen9

NOTE: This is a list of supported servers. Some may be discontinued.

Standard Features

Product Features

- Industry-leading 10GbE Ethernet NIC throughput and latency performance
- Up to 40Gb/s bi-directional near line rate throughput per adapter
- Hardware acceleration TCP/IP/UDP stateless offloads, as well as for TCP Offload Engine (TOE)
- Improved small packet performance
- Tunnel offload support (NVGRE, VxLAN)
- Low profile design shipping with standard height and low-profile brackets
- Optimized for virtual server environments with support for Network Partitioning (NPAR) and Single-Root I/O Virtualization (SR-IOV)
- Active Health Systems support via FW (OCBB), I2C capable
- PXE, Jumbo Frames, Checksum & Segmentation Offload, IPv6 and RSS
- On chip temperature monitor (OCSD)
- Standard server operating system support
- Standard NC series option kit warranty, support, services
- Field replaceable and upgradeable
- Support for Preboot eXecution Environment (PXE)
- Integrated PHY and MAC
- IEEE 1588 (Time Synchronization)
- CNU

Dual-port 10 Gigabit Ethernet Throughput

The HPE 534FLR-SFP+ adapter delivers 20 Gbps full duplex Ethernet transfer rate per port (40 Gbps per adapter), providing the network performance needed to improve response times and alleviate bottlenecks that impact performance of next generation data centers. 10Gb Ethernet bandwidth is ideal for enterprise applications, high performance computing, database clusters, and more.

Jumbo Frames

The HPE 534FLR-SFP+ adapter supports jumbo frames (also known as extended frames), permitting up to a 9K byte (KB) transmission unit (MTU) when running Ethernet I/O traffic. This is over 5X the size of a standard 1500-byte Ethernet frame. With jumbo frames, networks can achieve higher throughput performance and greater CPU utilization. These attributes are particularly useful for database transfer and tape backup operations.

DPDK

The HPE 534FLR-SFP+ adapter supports DPDK with benefit for packet processing acceleration and use in NFV deployments.

TCP/IP Stateless Offloading

The HPE 534FLR-SFP+ Adapter by QLogic offers Stateless Offloading including TCP, IP, UDP checksum offload, Large Send Offload (LSO), TCP, Segmentation Offload (TSO). These features optimize host efficiency, leaving the CPU available for other duties.

CNU

This adapter supports Converged Network Utility (CNU) a manageability application to configure converged network adapters (CNAs) and Ethernet adapters on HPE servers. This host based utility supports for both GUI and Command Line Interface (scriptable), and can be used to configure Ethernet, FCoE, iSCSI and NPAR related features/functionality on multiple OS platforms including Windows and Linux. CNU is able to configure multiple HPE adapters from various network controllers at the same time. Users can benefit easier setup steps, shorter re-boot time, and one-stop solution for multiple adapters via CNU.

MSI and MSI-X

Message Signaled Interrupt (Extended) provides performance benefits for multi-core servers by load balancing interrupts between CPUs/cores. The

802.1Q VLANs

IEEE 802.1Q virtual local area network (VLAN) protocol allows each physical port of the HPE 534FLR-SFP+ adapter to be separated into multiple virtual NICs for added network segmentation and enhanced security and performance. VLANs increase security by isolating traffic between users. Limiting the broadcast traffic to within

Standard Features

the same VLAN domain also improves performance.

Tunnel Offload	Minimize the impact of overlay networking on host performance with tunnel offload support for VXLAN and NVGRE. By offloading packet processing to adapters, customers can use overlay networking to increase VM migration flexibility and network scale with minimal impact to performance. HPE Tunnel Offloading increases I/O throughput, reduces CPU utilization, and lowers power consumption. NVGRE tunnel offload supports Microsoft OS environments and VXLAN supports select VMware and Linux (RHEL and SUSE) environments.
TOE	TCP/IP Offload Engine (TOE) shifts the processing of data in the TCP protocol stack from the server CPU to the adapter's processor, freeing server CPU cycles for other operations.
Single-Root I/O Virtualization	Single-Root I/O Virtualization (SR-IOV) provides a mechanism to bypass the host system hypervisor in virtual environments providing near metal performance and server efficiency. SR-IOV provides mechanism to create multiple Virtual Functions (VFs) to share single PCIe resources. The device supports SR-IOV with appropriate server BIOS and OS support.
Optimized for Virtualization	I/O Virtualization support for VMware NetQueue and Microsoft VMQ help meet the performance demands of consolidated virtual workloads.
Checksum & Segmentation Offload	<p>Normally the TCP Checksum is computed by the protocol stack. By selecting one of the "Checksum Offload" parameters, the checksum can be computed by the adapter.</p> <p>Segmentation Offload is technique for increasing outbound throughput of high-bandwidth network connections by reducing CPU overhead. The technique is also called TCP segmentation offload (TSO) when applied to TCP, or generic segmentation offload (GSO).</p>
IPv6	IPv6 uses 128-bit addressing allowing for more devices and users on the internet. IPv4 supported 32-bit addressing.
Receive Side Scaling (RSS)	RSS resolves the single-processor bottleneck by allowing the receive side network load from a network adapter to be shared across multiple processors. RSS enables packet receive-processing to scale with the number of available processors.
Time synchronization implementations (PTP)	Synchronization of system clocks throughout a network, achieving clock accuracy in the sub-microsecond range, making it suitable for measurement and control systems.
iSCSI/FCoE	The HPE 534FLR-SFP+ Adapter supports accelerated iSCSI or iSCSI boot and FCoE.
Network Adapter Teaming	The HPE 534FLR-SFP+ adapter support for NIC teaming helps IT administrators increase network fault tolerance and increased network bandwidth, The team of adapters can work together as a single virtual adapter. The HPE 534FLR-SFP+ provides support for several different types of teaming enabling IT administrators to optimize availability, improve performance and help reduce costs.
Network Partitioning	The HPE 534FLR-SFP+ supports Network Partitioning (NPAR) for ProLiant Gen8 and Gen9 rack servers. Allowing administrators to configure a 10Gb port as four separate partitions or physical functions. Each PCI function is associated with a different virtual NIC. To the OS and the network, each physical function appears as a separate NIC port.

Standard Features

Network Management

Management Support The HPE 534FLR-SFP+ adapter can be administered from HPE Systems Insight Manager (SIM). The adapters can be managed individually or in teams, providing SNMP based statistics for reporting purposes. The HPE 534SFP+ adapter can also be managed by other applications with SNMP support.

Server Integration The HPE 534FLR-SFP+ adapter is a validated, tested, and qualified solution that is optimized for HPE ProLiant servers. Hewlett Packard Enterprise validates a wide variety of major operating systems drivers with the full suite of web-based enterprise management utilities including HPE Intelligent Provisioning and HPE Systems Insight Manager that simplify network management.

This approach provides a more robust and reliable networking solution than offerings from other vendors and provides users with a single point of contact for both their servers and their network adapters.

Configuration Utilities Each HPE 534FLR-SFP+ ships with a suite of operating system-tailored configuration utilities that allow the user to enable initial diagnostics and configure adapter teaming. This includes a patented teaming GUI for Microsoft Windows operating systems. Additionally, support for scripted installations of teams in a Microsoft Windows environment allow for unattended OS installations.

LED Indicators The colored LEDs on each port of the HPE 534FLR-SFP+ adapter indicate link status and link activity.

Preboot eXecution Environment (PXE) PXE allows the server to boot over the network and download software residing in the network.

HPE Sea of Sensors 3D Support for HPE's Sea of Sensors which is a collection of 32 sensors that automatically track thermal activity - heat - across the server. When temperatures get too high, sensors can kick on fans and make other adjustments to reduce energy usage. What makes it better is the upgrade from all six fans kicking on at one time to a new system where only one kicks on - the one in proximity of the area that started heating up - thus reducing the amount of energy used for cooling.

VMware NetQueue and Microsoft Virtual Machine Queue (VMQ) VMware NetQueue is technology that significantly improves performance of 10 Gigabit Ethernet network adapters in virtualized environments.

Windows Hyper-V VMQ (VMQ) is a feature available on servers running Windows Server 2008 R2 with VMQ-enabled Ethernet adapters. VMQ uses hardware packet filtering to deliver packet data from an external virtual machine network directly to virtual machines, which reduces the overhead of routing packets and copying them from the management operating system to the virtual machine.

Warranty Maximum: The remaining warranty of the HPE product in which it is installed (to a maximum three-year, limited warranty).
Minimum: One year limited warranty.

Additional information regarding worldwide limited warranty and technical support is available at: <http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/index.aspx#.V4e3tPkrJhE>

Service and Support

Service and Support

HPE Technology Services

HPE Technology Services offers you technical consultants and support expertise to solve your most complex infrastructure problems. We help keep your business running, boost availability, and avoid downtime.

Protect your business beyond warranty with HPE Care Pack Services

When you buy HPE Options, it's also a good time to think about what level of service you may need. HPE Care Pack services provide total care and support expertise with committed response choices designed to meet your IT and business need.

HPE Foundation Care services deliver scalable support-packages for Hewlett Packard Enterprise industry-standard servers and software. You can choose the type and level of service that is most suitable for your business needs. New to this portfolio is HPE Collaborative Support. If you are running business critical environments, Hewlett Packard Enterprise offers Proactive Care or Critical Advantage. These services help you deliver high levels of application availability through proactive service management and advanced technical response.

Here is the support service recommendation from the Foundation Care and Proactive Care portfolio. For customized support service solution, Hewlett Packard Enterprise can work with you to tailor a service solution for your unique support requirements using broader services portfolio of Foundation Care and Proactive Care.

Recommended HPE Care Pack Services for optimal satisfaction with your HPE product

Recommended Services

3-Year HPE 24x7 4 hour Response, Hardware Support Onsite Service

Provides you with rapid remote support and if required a Hewlett Packard Enterprise Authorized representative who will arrive on site any time and day of the year to begin hardware maintenance service within 4 hours of the service request being logged.

<http://h20566.www2.hpe.com/portal/site/hpsc?ac.admitted=1467740454177.125225703.1938120508>

OR

3-Year HPE 24x7 4 hour Response, HPE Collaborative Support

Offers customers a single point of contact for server problem diagnosis, hardware problem resolution, and basic software problem diagnosis, fault isolation, and resolution if available to HPE. If the problem is with HPE HW, the representative will arrive on site any time and day of the year to begin hardware maintenance service within 4 hours of the service request being logged. In case, the issue is with HPE or supported third-party software product and cannot be resolved by applying known fixes, Hewlett Packard Enterprise will contact the third-party vendor and create a problem incident on your behalf.

HPE ProLiant Server Hardware Installation

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner

<https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=5981-9356EN>

Related HPE Care Pack Services to enhance your HPE product experience

Related Services

3-Year HPE 24x7 4 hour Response, Proactive Care or Critical Advantage

Helps optimize your systems and delivers high levels of application availability through proactive service management and advanced technical response. A skilled Technical Manager will own your query or issue end to end until resolved, delivering a single point of contact for you

<http://h20566.www2.hpe.com/portal/site/hpsc?ac.admitted=1467740454177.125225703.1>

OR

Service and Support

3-Year HPE 6-hour Onsite Call-to-Repair, HPE Collaborative Support

Offers customers a single point of contact for server problem diagnosis, hardware problem resolution to return the hardware in operating condition within 6 hours of the initial service request to the HPE Global Solution Center, and basic software problem diagnosis, fault isolation, and resolution if available to HPE. In case, the issue is with HPE or supported third-party software product and cannot be resolved by applying known fixes, Hewlett Packard Enterprise will contact the third-party vendor and create a problem incident on your behalf.

HPE Proactive Select Service

Provides a flexible way to purchase HPE best-in-class consultancy and technical services. You can buy Proactive Select Service Credits when you purchase your hardware and then use the credits over the next 12 months. <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=4AA3-8855ENW&search=4AA3-8855ENW>

Insight Remote Support

Provides 24 X 7 remote monitoring, proactive notifications, and problem resolution. Learn more <http://h20564.www2.hpe.com/hpsc/doc/public/display?docId=c04844073>

HPE Support Center

Personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers. Learn more <https://www.hpe.com/us/en/support.html>

The HPE Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Care Pack or Hewlett Packard Enterprise contractual support agreement.

*The Hewlett Packard Enterprise Support Center Mobile App is subject to local availability

Parts and materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements. Supplies and consumable parts will not be provided as part of this service; standard warranty terms and conditions apply. Parts and components that have exceeded their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual or the technical product data sheet will not be provided, repaired or replaced as part of this service.

Warranty / Service Coverage

For ProLiant servers and storage systems, this service covers HPE-branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as external monitors up to 22" and tower UPS products; these items will be covered at the same service level and for the same coverage period as the server unless the maximum supported lifetime and/or the maximum usage limitation has been exceeded. Coverage of the UPS battery is not included; standard warranty terms and conditions apply.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction. It does not apply to any exchange of Disk or SSD/Flash Drives that have not failed. SSD/Flash Drives that are specified by HPE as consumable parts and/or that have exceeded maximum supported lifetime and/or the maximum usage limit as set forth in the manufacturer's operating manual or the technical data sheet are not eligible for the defective media retention service feature option.

For more information

To learn more on services for HPE ESSN Options, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. Or visit: <https://www.hpe.com/us/en/servers>

Related Options

Cables	HPE LC to LC Multi-mode OM3 2-Fiber 0.5m 1-Pack Fiber Optic Cable	AJ833A	
	HPE LC to LC Multi-mode OM3 2-Fiber 1.0m 1-Pack Fiber Optic Cable	AJ834A	
	HPE LC to LC Multi-mode OM3 2-Fiber 5.0m 1-Pack Fiber Optic Cable	AJ836A	
	HPE LC to LC Multi-mode OM3 2-Fiber 15.0m 1-Pack Fiber Optic Cable	AJ837A	
	HPE LC to LC Multi-mode OM3 2-Fiber 30.0m 1-Pack Fiber Optic Cable	AJ838A	
	HPE LC to LC Multi-mode OM3 2-Fiber 50.0m 1-Pack Fiber Optic Cable	AJ839A	
	NOTE: Fiber transceivers and cables must be purchased separately for fiber-optic environments.		
	HPE FlexNetwork X240 10G SFP+ to SFP+ 0.65m Direct Attach Copper Cable	JD095C	
	HPE FlexNetwork X240 10G SFP+ to SFP+ 1.2m Direct Attach Copper Cable	JD096C	
	HPE FlexNetwork X240 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	JD097C	
	HPE FlexNetwork X240 10G SFP+ to SFP+ 5m Direct Attach Copper Cable	JG081C	
	HPE FlexNetwork X240 10G SFP+ SFP+ 7m Direct Attach Copper Cable	JC784C	
	HPE FlexNetwork X240 40G QSFP+ to 4x10G SFP+ 1m Direct Attach Copper Splitter Cable	JG329A	
	HPE FlexNetwork X240 40G QSFP+ to 4x10G SFP+ 3m Direct Attach Copper Splitter Cable	JG330A	
	HPE FlexNetwork X240 40G QSFP+ to 4x10G SFP+ 5m Direct Attach Copper Splitter Cable	JG331A	
	HPE X242 10G SFP+ to SFP+ 1m Direct Attach Copper Cable	J9281B	
	HPE X242 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	J9283B	
HPE X242 10G SFP+ to SFP+ 7m Direct Attach Copper Cable	J9285B		
Transceiver	HPE BladeSystem c-Class 10Gb SFP+ SR Transceiver	455883-B21	
	HPE BladeSystem c-Class 10Gb SFP+ LR Transceiver	455886-B21	

Technical Specifications

General Specifications	Network Processor	QLogic 57810S chipset
	Data Rate	Two ports, each at 20 Gbps full duplex; 40 Gbps aggregate full duplex theoretical bandwidth.
	Bus Type	PCI-e 2.0 x8
	Form Factor	Standard and low profile adapter compliant with the PCIe standard
	IEEE Compliance	802.3, 802.3ae, 802.3x, 802.2x, 802.3ad, 802.1Qaz, 802.1Qau, 802.1Qbb, 802.1Qbg, 802.1ax

Power and Environmental Specifications	Operating	Temperature	32° to 131° F (0° to 55° C)
		Humidity	5% to 95% non-condensing
	Power	9W maximum	
	Emissions classification	Class A	
	Agency approvals	USA	FCC Part 15 Class A
		Canada	ICES--3, Issue 4
		Japan	VCCI V3 (2010.04) Class A
		International	EN55022:2006 + A1:2007 Class A, EN55024:1998+A1:2011+A2; EN61000-3-2:2006, EN61000-3-3:2008
		Taiwan	BSMI, CNS13438 (2006) Class A
		Australia/New Zealand (AS/NZS):	EN55022:2006+A12007 class A
	Korea	KN22 Class A, KN24	
RoHS Compliance	6 of 6		
Safety	UL Mark (USA and Canada)		
	CE Mark		
	EN 60590		

Operating System Support **Microsoft:**
 Microsoft Windows Server 2008 SP2 and R2 w/SP1 (x86 and x64)
 Microsoft Windows Server 2012, 2012 R2
 Microsoft Windows Hyper-V 2008 R2 w/SP1, 2012, 2012 R2

Linux:
 Red Hat Enterprise Linux (RHEL) 5, 6 and 7
 SUSE Linux Enterprise Server 11 and 12

Solaris:
 Solaris 10 and 11

Hypervisors:
 VMware ESXi 5.x and 6.x
 VMware vSphere 5.5

NOTE:

1. For more operating system support & certification information, please visit:
http://h17007.www1.hp.com/us/en/enterprise/servers/supportmatrix/redhat_linux.aspx#.V4e8tPkrJD8

Technical Specifications

2. Minimum Linux versions for FCoE support include RHEL 6.4 and SLES11SP3.
3. vSphere 5.5 is the minimum version of VMware for SRIOV support.
4. Boot from SAN via the iSCSI offload path is not supported for VMware.
5. Networking only support for Solaris and Citrix XenServer.

Environment-friendly Products and Approach

End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <https://www.hpe.com/us/en/living-progress.html> recycle your product, please go to: <https://www.hpe.com/us/en/living-progress.html> or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: <https://www.hpe.com/us/en/living-progress.html>. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
10-Feb-2017	From Version 7 to 8	Changed	Compatibility, Standard Features, and Related Options sections were updated.
21-Oct-2016	From Version 6 to 7	Changed	Add DPDK support and update servers
23-Sep-2016	From Version 5 to 6	Changed	Overview, compatibility, standard features, Related Options, and Technical Specifications
		Removed	Obsolete SKUs were deleted: 503746-B21, 593717-B21, 614203-B21, 629135-B21, 665240-B21, 647581-B21, 665243-B21, 700699-B21, 629138-B21, 700759-B21.
19-Jun-2015	From Version 4 to 5	Removed	Obsolete SKUs removed: 412648-B21, 435508-B21, 394793-B21, 394791-B21, 458492-B21, 581201-B21.
		Changed	Overview, Compatibility, Standard Features, Technical Specifications, Related Options sections were updated.
28-Nov-2014	From Version 3 to 4	Changed	Overview, Compatibility, Standard Features and Technical Specifications sections were updated.
		Added	Section Fiber Optic Modules added on Related Options, SKUs added on this section: 455883-B21, 455886-B21.
13-Aug-2014	From Version 2 to 3	Changed	Graphic was changed. Broadcom was replaced by QLogic. iSCSI/FCoE sub-section added in Standard Features.
09-May-2014	From Version 1 to 2	Changed	Product name was revised throughout.



Sign up for updates



© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Windows is a US registered trademark of Microsoft Corporation.

c04111369 - 14618 - Worldwide - V8 - 10-February-2017