


Overview

HPE Ethernet 10Gb 2-port 560M Adapter

The HPE Ethernet 10Gb 2-port 560M adapter features the latest generation 10GbE Intel® 82599 controller. The HPE 560M is a low cost, low-power dual port PCIe v.2.0 x8 lane mezzanine adapter designed for HPE ProLiant Gen8 BL-c servers. The HPE 560M addresses the demanding needs of the next-generation cloud and data center by providing unmatched features for virtualization, scalability to keep up with the HPE ProLiant Gen8 server platform, with proven and reliable performance Hewlett Packard Enterprise customers have come to expect.

The HPE 560M supports enterprise class features such as VLAN tagging, adaptive interrupt coalescing, MSI-X, NIC teaming (bonding), Receive Side Scaling (RSS), jumbo frames, IEEE 1588, PXE boot and virtualization features such as VMware NetQueue, Microsoft VMQ, Intel VMDq and Intel VT-c. The HPE 560M is SR-IOV ready.

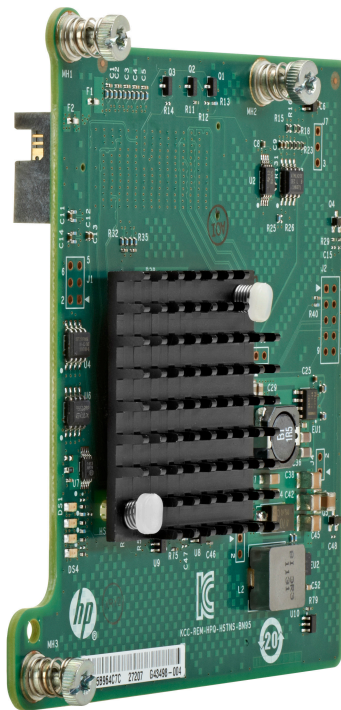

HPE Ethernet 10Gb 2-port 560M Adapter

Platform Information

Models

HPE Ethernet 10Gb 2-port 560M Adapter

665246-B21

NOTE: The HPE 560M on each server blade connects to a 10 Gb interconnect in bays 3-8 (HPE BladeSystem c7000 Enclosure) or bays 2-4 (HPE BladeSystem c3000 Enclosure).

NOTE: This adapter requires a minimum of 2 GB of server memory.

Kit Contents HPE Ethernet 10Gb 2-port 560M Adapter
Quick install card
Product warranty statement

Compatibility - Supported Servers HPE ProLiant BL460c Gen9 Server Blade
HPE ProLiant BL660c Gen9 Server Blade
HPE ProLiant WS460c Gen9 Server Blade
HPE ProLiant BL460c Gen10 Server Blade

NOTE: This is a list of supported servers. Some may be discontinued.

Compatibility - Supported Interconnect Modules HPE 6120XG Blade Switch
HPE 6120G/XG Blade Switch
HPE 6125G/XG Ethernet Blade Switch
HPE 6125XLG Ethernet Blade Switch
HPE 6127XLG Ethernet Blade Switch
HPE 1:10Gb Ethernet BL-c Switch
Cisco Catalyst 3120G Blade Switch for HPE
Cisco Catalyst 3120X Blade Switch for HPE
Cisco Catalyst 3020 Blade Switch
Cisco Fabric Extender B22HP for HPE
HPE GbE2c Layer 2/3 Ethernet Blade Switch
HPE 10GbE Pass-Thru Module
HPE 1GbE Pass Thru Module

NOTE: 10GbE converged connectivity is supported in all HPE 6120XG, HPE 6125XG series switches, Cisco B22 Fabric Extender and HPE 10GbE Pass-Thru modules. All other supported interconnects and switches are limited to 1GbE per connection for Ethernet-only traffic.

Standard Features

At a Glance Features

- Industry-leading throughput and latency performance
- Supports HPE ProLiant Gen8 BL-c servers
- Type A mezzanine adapter
- Dual 10 Gb ports provide up to 40 Gb bi-directional per adapter
- Hardware and software acceleration and intelligent offloads for stateless TCP/IP Jumbo frames support
- Supports receive-side scaling (RSS) for efficient distribution of network receive processing across multiple CPUs in multiprocessor systems.
- Supports the Preboot eXecution Environment (PXE)
- Supports Wake-on-LAN (at 1Gb)

NOTE: Wake-on-LAN is supported only on Port1 from system power state S5.

Throughput-Theoretical Bandwidth

This adapter delivers 20 Gb/s bi-directional Ethernet transfer rate per port (40 Gb/s per adapter), providing the network performance needed to improve response times and alleviate bottlenecks.

802.1p QoS Tagging

IEEE quality of service (QoS) 802.1p tagging allows the adapter to mark or tag frames with a priority level across a QoS-aware network for improved traffic flow.

802.1Q VLANs

IEEE 802.1Q virtual local area network (VLAN) protocol allows each physical port of this adapter to be separated into multiple virtual NICs for added network segmentation and enhanced security and performance. VLANs increase security by isolating traffic between users. Limiting the broadcast traffic to within the same VLAN domain also improves performance.

Active Health System

Supports HPE Active Health System - monitors and records changes in the server hardware and configuration enabling customers to have accurate information that will assist in diagnosing problems and delivering rapid resolution when server failures occur.

DPDK

This adapter supports DPDK with benefit for packet processing acceleration and use in NFV deployments.

HPE Sea Of Sensors 3D

Support for the HPE Sea of Sensors which is a collection of 32 sensors that automatically track thermal activity - heat - across the server. When temperatures get too high, sensors can initiate fans and make other adjustments to reduce energy usage. A significant improvement lies in the ability to apply fan speed increases only to the portion of the system that is rising in temperature, rather than all six fans in unison, which reduces the amount of energy used for cooling.

Interrupt Coalescing

Interrupt coalescing (interrupt moderation) groups multiple packets, thereby reducing the number of interrupts sent to the host. This process optimizes host efficiency, leaving the CPU available for other duties.

Jumbo Frames

This adapter supports Jumbo Frames (also known as extended frames), permitting up to a 9,500 byte (KB) transmission unit (MTU) when running Ethernet I/O traffic. This is over six times the size of a standard 1500-

Standard Features

byte Ethernet frame. With Jumbo Frames, networks can achieve higher throughput performance and greater CPU utilization. These attributes are particularly useful for database transfer and tape backup operations.

Management Support This adapter ships with agents that can be managed from HPE Systems Insight Manager or other management application that support SNMP.

Network Adapter Teaming This adapter support for NIC teaming helps IT administrators increase network fault tolerance and increased network bandwidth, the team of adapters can work together as a single virtual adapter, providing support for several different types of teaming enabling IT administrators to optimize availability, improve performance and help reduce costs.

Optimized for Virtualization I/O Virtualization support for VMware NetQueue and Microsoft VMQ helps meet the performance demands of consolidated virtual workloads.

Preboot eXecution Environment (PXE) Support for PXE enables automatic deployment of computing resources remotely from anywhere. It allows a new or existing server to boot over the network and download software, including the operating system, from a management/ deployment server at another location on the network. Additionally, PXE enables decentralized software distribution and remote troubleshooting and repairs.

TCP/UDP/IP For overall improved system response, this adapter supports standard TCP/IP offloading techniques including: TCP/IP, UDP checksum offload (TCO) moves the TCP and IP checksum offloading from the CPU to the network adapter. Large send offload (LSO) or TCP segmentation offload (TSO) allows the TCP segmentation to be handled by the adapter rather than the CPU.

Precision Time Protocol (IEEE 1588 PTP) Synchronization of system clocks throughout a network, achieving clock accuracy in the sub-microsecond range, making it suitable for measurement and control systems.

Warranty Maximum: The remaining warranty of the HPE product in which it is installed (to a maximum three-year, limited warranty).

Minimum: One year limited warranty.

NOTE: Additional information regarding worldwide limited warranty and technical support is available at: <http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/index.aspx#.V4e3tPkrJhE>

Service and Support

Service and Support **NOTE: This adapter is covered under HPE Support Services/ Service Contract applied to the HPE ProLiant Server or enclosure. No separate HPE Support Services# need to be purchased.**

Most HPE branded options sourced from HPE that are compatible with your product will be covered under your main product support at the same level of coverage, allowing you to upgrade freely. Additional support is required on select workload accelerators, switches, racks and UPS options 12KVA and over. Coverage of the UPS battery is not included under HPE support services; standard warranty terms and conditions apply.

Warranty and Support Services

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS options 12KVA and over. Coverage of the UPS battery is not included under TS support services; standard warranty terms and conditions apply.

Protect your business beyond warranty with HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HPE to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support you need for your IT and business.
Protect your product, beyond warranty.

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements. Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services. The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

For more information

Visit the Hewlett Packard Enterprise Service and Support [website](#).

Technical Specifications

General Specifications	Network Processor	Intel® 82599 Controller
	Data Rate	Two ports, each at 20 Gb/s bi-directional; 40 Gb/s aggregate bi-directional theoretical bandwidth.
	Bus type	PCI Express 2.0 (Gen 2) x8
	Form Factor	Type A Mezzanine Card
	IEEE Compliance	802.3, 802.1ab, 802.3x, 802.3ad, 802.3p/802.1q, 802.3ae, 802.1qau, 802.3ap, 802.1as, 802.1qaz, 802.1Qbb

Power and Environmental Specifications	Power	6.5W maximum
	Temperature - Operating	0° to 55°C (32° to 131°F)
	Humidity - Operating	10% to 90% non-condensing
	Agency Approvals	USA: FCC (CFR 47 part 15) and UL 60950 Canada: ICES-003 and CSA60950 Japan: VCCI European Union: EN55022:1998 (CISPR 22), EN55024:1998, and IEC60950:1999 (EN60950:2000) Australia: ACA, AS/NZS3548/EN55022:1998, EN55024:1998 Korea: MIC (RRL), EMC Registration
	RoHS Compliance	6 of 6

Operating System and Virtualization Support	• Microsoft Windows Server 2012
	• Microsoft Windows Server 2008 SP2, R2 (x86, x64)
	• Microsoft Windows Hyper-V, R2 SP1
	• Red Hat Enterprise Linux (RHEL) 5.7, 6.1 (x86, EM64T/AMD64)
	• SUSE Linux Enterprise Server (SLES) (x86, EM64T/AMD64)
	• VMware ESX/ESXi 4.1u2, ESXi 5.0u1, ESXi 5.1.
	• vSphere 6.5
• Citrix XenServer 6.0	
• Solaris 10 (x86, x64)	

NOTE: For more Linux OS support and certification information, please visit: http://h17007.www1.hp.com/us/en/enterprise/servers/supportmatrix/redhat_linux.aspx#.V4e8tPkrJD8

Environment-friendly Products and Approach - End-of-life Management and Recycling	Hewlett Packard Enterprise offers end-of-life product return, trade-in, and recycling programs in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.
	The EU WEEE Directive (2012/19/EU) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site . These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
11-Jul-2017	From Version 11 to 12	Changed	Compatibility section was updated
20-Jan-2017	From Version 10 to 11	Changed	Compatibility, Related options - updated part names, Technical specifications - operating system support - added vSphere 6.5
07-Oct-2016	From Version 9 to 10	Changed	Add DPDK and 6127XLG switch
22-Jul-2016	From Version 8 to 9	Changed	QuickSpecs sections were updated.
17-Dec-2015	From Version 7 to 8	Changed	Compatibility section was updated.
		Removed	Obsolete SKUs were deleted: 451438-B21, 451439-B21
19-Jun-2015	From Version 6 to 7	Changed	Compatibility section was updated.
18-Apr-2014	From Version 5 to 6	Changed	Changes made in Service and Support section.
21-Mar-2014	From Version 4 to 5	Changed	HPE 6125XLG Ethernet Blade Switch was added.
05-Jul-2013	From Version 3 to 4	Changed	Supported Interconnect Modules were revised in Compatibility c-Class BladeSystem Interconnect Options was added to Related Options
15-Mar-2013	From Version 2 to 3	Removed	Removed some content from the Supported Interconnect Modules.
01-Mar-2013	From Version 1 to 2	Changed	Updated the Compatibility Section.
19-Feb-2013	Version 1	New	Initial version.



[Sign up for updates](#)



© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

c04111406 - 14478 - Worldwide - V12 - 11-July-2017