


### Overview

### Aruba 2620 Switch Series

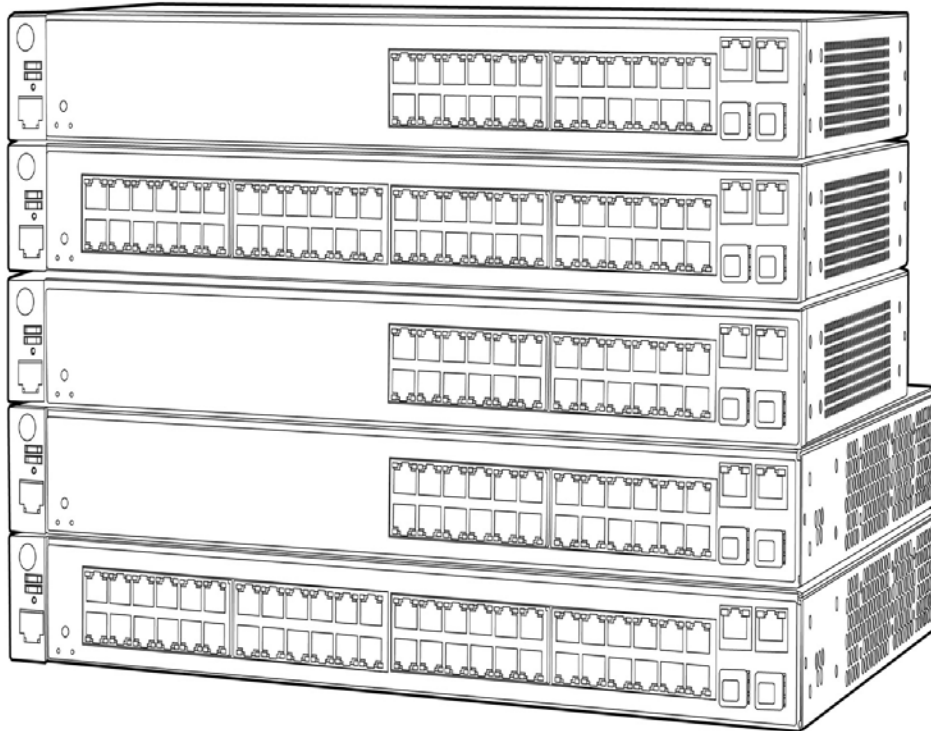

**Aruba 2620 Switch Series Family**

### Models

Aruba 2620 24 Switch	J9623A
Aruba 2620 24 PPOE+ Switch	J9624A
Aruba 2620 24 PoE+ Switch	J9625A
Aruba 2620 48 Switch	J9626A
Aruba 2620 48 PoE+ Switch	J9627A

### Key features

- Cost-effective access layer switches
- Lite L3 IPv4/IPv6 static and RIP routing
- 30 W PoE+ support on PoE models
- Gigabit fiber uplinks
- Enterprise-class features

### Product overview

The Aruba 2620 Switch Series consists of five switches with 10/100 connectivity. The 2620-24 Switch has a fan-less design for quiet operation, making it suitable for deployments in open spaces. The models 2620-24-PPoE+, 2620-24-PoE+ models, and

## Overview

2620-48-PoE+ are IEEE 802.3af- and IEEE 802.3at-compliant switches that provide up to 30 W per powered port. The 2620-48 model has variable-speed fans for quiet operation.

All 2620 switches include two 10/100/1000BASE-T ports and two SFP slots for Gigabit Ethernet uplink connectivity. An optional redundant external power supply is also available to provide redundancy in the event of a power supply failure.

With IPv4/IPv6 static and RIP routing, robust security and management features, as well as Limited Lifetime Warranty and included software updates, the 2620 Switch Series is a cost-effective solution for those building converged enterprise-edge networks.

---

## Features and benefits

### Quality of Service (QoS)

- **Layer 4 prioritization**  
enables prioritization based on TCP/UDP port numbers
- **Traffic prioritization (IEEE 802.1p)**  
allows real-time traffic classification into eight priority levels mapped to eight queues
- **Class of Service (CoS)**  
sets the IEEE 802.1p priority tag based on IP address, IP Type of Service (ToS), Layer 3 protocol, TCP/UDP port number, source port, and DiffServ
- **Rate limiting**  
sets per-port ingress enforced maximums and per-port, per-queue minimums

### Connectivity

- **Auto-MDIX**  
provides automatic adjustments for straight-through or crossover cables on all 10/100 and 10/100/1000 ports
- **IPv6**
  - **IPv6 host**  
allows the switches to be managed and deployed at the edge of an IPv6 network
  - **Dual stack (IPv4/IPv6)**  
provides a transition mechanism from IPv4 to IPv6; and supports connectivity for both protocols
  - **MLD snooping**  
forwards IPv6 multicast traffic to the appropriate interface; and helps prevent IPv6 multicast traffic from flooding the network
  - **Security**  
RA Guard, DHCPv6 Protection, Dynamic IPv6 Lockdown
- **IEEE 802.3af Power over Ethernet (PoE)**  
provides up to 15.4 W per port to IEEE 802.3af-compliant PoE-powered devices such as IP phones, wireless access points, and security cameras
- **IEEE 802.3at PoE+**  
provides up to 30 W per port to IEEE 802.3 for PoE-/PoE+-powered devices such as video IP phones, IEEE 802.11n wireless access points, and advanced pan/tilt/zoom security cameras
- **Pre-standard PoE support**  
detects and provides power to pre-standard PoE devices (refer to the list of supported devices in the product FAQs, which can be accessed at <http://www.hpe.com/networking>)
- **Single IP address management**  
provides single-IP-address management for a virtual stack of up to 16 switches

### Resiliency and high availability

- **External redundant power supply**  
provides high reliability
- **IEEE 802.3ad Link Aggregation Protocol (LACP) and Hewlett Packard Enterprise port trunking**  
support up to 24 trunks, each with up to 8 links (ports) per trunk

## Overview

- **IEEE 802.1s Multiple Spanning Tree**  
provides high link availability in multiple VLAN environments by allowing multiple spanning trees
- **SmartLink**  
provides easy-to-configure link redundancy of active and standby links

## Manageability

- **Dual flash images**  
provides independent primary and secondary operating system files for backup while upgrading
- **Friendly port names**  
allows assignment of descriptive names to ports
- **Multiple configuration files**  
stores easily to the flash image
- **Port mirroring**  
enables traffic on a port to be simultaneously sent to a network analyzer for monitoring
- **sFlow (RFC 3176)**  
delivers wire-speed traffic accounting and monitoring, configured by the SNMP and CLI with three terminal encrypted receivers
- **Remote monitoring (RMON)**  
provides advanced monitoring and reporting capabilities for statistics, history, alarms, and events
- **Find, fix, and inform**  
finds and fixes common network problems automatically, and then informs the administrator
- **Comware CLI**
  - **Comware-compatible CLI**  
bridges the experience of Hewlett Packard Enterprise Comware CLI users who are using the ProVision CLI
  - **Display and fundamental Comware CLI commands**  
are natively embedded in the switch CLI; display output is formatted as on Comware-based switches; fundamental commands provide Comware-familiar initial switch setup
  - **Configuration Comware CLI commands**  
when Comware commands are entered, CLI help is elicited to formulate the correct ProVision software CLI command
- **TR-069 support**  
enables zero-touch configuration for switches
- **Zero-Touch ProVisioning (ZTP)**  
uses settings in DHCP to enable ZTP with Aruba AirWave Network Management

## Layer 2 switching

- **VLANs**  
provide support for 512 VLANs and 4,094 VLAN IDs
- **Jumbo packet support**  
improves the performance of large data transfers; supports frame size of up to 9220 bytes
- **IEEE 802.1v protocol VLANs**  
isolate select non-IPv4 protocols automatically into their own VLANs
- **Per-VLAN Spanning Tree Plus (PVST+)**  
allows each VLAN to build a separate spanning tree to improve link bandwidth usage in network environments with multiple V

## Layer 3 routing

- **Static IP routing**  
provides manually configured routing; includes ECMP capability
- **Routing Information Protocol (RIP)**

## Overview

provides RIPv1 and RIPv2 routing

## Security

- **Access control lists (ACLs)**  
provide IP Layer 3 filtering based on source/destination IP address/subnet and source/destination TCP/UDP port number
- **Source-port filtering**  
allows only specified ports to communicate with each other
- **RADIUS/TACACS+**  
eases switch management security administration by using a password authentication server
- **Secure shell**  
encrypts all transmitted data for secure remote CLI access over IP networks
- **Secure Sockets Layer (SSL)**  
encrypts all HTTP traffic, allowing secure access to the browser-based management GUI in the switch
- **Port security**  
allows access only to specified MAC addresses, which can be learned or specified by the administrator
- **MAC address lockout**  
prevents particular configured MAC addresses from connecting to the network
- **Secure FTP**  
allows secure file transfer to and from the switch; protects against unwanted file downloads or unauthorized copying of a switch configuration file
- **Custom banner**  
displays security policy when users log in to the switch
- **Identity-driven ACL**  
enables implementation of a highly granular and flexible access security policy and VLAN assignment specific to each authenticated network user
- **STP BPDU port protection**  
blocks Bridge Protocol Data Units (BPDUs) on ports that do not require BPDUs, preventing forged BPDU attacks
- **STP root guard**  
protects the root bridge from malicious attacks or configuration mistakes
- **DHCP protection**  
blocks DHCP packets from unauthorized DHCP servers, preventing denial-of-service attacks
- **Dynamic ARP protection**  
blocks ARP broadcasts from unauthorized hosts, preventing eavesdropping or theft of network data
- **Multiple user authentication methods**
  - **IEEE 802.1X**  
uses an IEEE 802.1X supplicant on the client in conjunction with a RADIUS server to authenticate in accordance with industry standards
  - **Web-based authentication**  
provides a browser-based environment, similar to IEEE 802.1X, to authenticate clients that do not support the IEEE 802.1X supplicant
  - **MAC-based authentication**  
authenticates the client with the RADIUS server based on the client's MAC address
- **Authentication flexibility**
  - **Multiple IEEE 802.1X users per port**  
provides authentication of multiple IEEE 802.1X users per port; prevents a user from "piggybacking" on another user's IEEE 802.1X authentication
  - **Concurrent IEEE 802.1X, Web, and MAC authentication schemes per port**  
switch port will accept up to 32 sessions of IEEE 802.1X, Web, and MAC authentications
- **Port mirroring for network threats**  
provides sampled port traffic, using sFlow technology, to the HPE Network Immunity Manager application for network-behavior-anomaly-detection analysis—to detect and mitigate threats at the ports where the threats originate
- **Per-port broadcast throttling**  
selectively configures broadcast control on heavy traffic port uplinks

## Overview

### Convergence

- **IP multicast snooping and data-driven IGMP**  
automatically prevent flooding of IP multicast traffic
- **LLDP-MED (Media Endpoint Discovery)**  
defines a standard extension of LLDP that stores values for parameters such as QoS and VLAN to automatically configure network devices such as IP phones
- **IEEE 802.1AB Link Layer Discovery Protocol (LLDP)**  
facilitates easy mapping using network management applications with LLDP automated device discovery protocol
- **PoE and PoE+ allocations**  
support multiple methods—automatic, IEEE 802.3at dynamic, LLDP-MED fine grain, IEEE 802.3af device class, or user specified—to allocate and manage PoE/PoE+ power for more efficient energy use
- **LLDP-CDP compatibility**  
receives and recognizes CDP packets from Cisco's IP phones for seamless interoperation
- **Local MAC Authentication**  
assigns attributes such as VLAN and QoS using locally configured profile that can be a list of MAC prefixes

### Unified Wired and Wireless

- **ClearPass Policy Manager support**  
unified wired and wireless policies using Aruba ClearPass Policy Manager
- **HTTP redirect function**  
supports HPE Intelligent Management Center (IMC) bring your own device (BYOD) solution
- **Switch auto-configuration**  
automatically configures switch for different settings such as VLAN, CoS, PoE max power, and PoE priority when an Aruba access point is detected
- **User role**  
defines a set of switch-based policies in areas such as security, authentication, and QoS. A user role can be assigned to a group of users or devices, using switch configuration or ClearPass

### Monitor and diagnostics

- **Port mirroring**  
enables traffic on a port to be simultaneously sent to a network analyzer for monitoring
- **Software updates**  
free downloads from the Web

### Flexibility

- **Quiet operation**
  - **Fan-less design (2620-24 switch)**  
enables quiet operation for deployment in open spaces
  - **Variable-speed fans (2620-24-PPoE+, 2620-24-PoE+, 2620-48, and 2620-48-PoE+ switches)**  
improve fan speed for the operating environment, while keeping noise and energy consumption levels to a minimum
- **Flexible mounting**
  - **Rack mountable**  
allows the switch to be mounted on a standard 19-inch rack, with the hardware included
  - **Surface mountable**  
allows the switch to be mounted above or below a surface (such as a desk or table), using the hardware included

### Warranty and support

## Overview

- **Limited Lifetime Warranty**

See <http://www.hpe.com/networking/warrantysummary> for warranty and support information included with your product purchase.

- **Software releases**

to find software for your product, refer to <http://www.hpe.com/networking/support>; for details on the software releases available with your product purchase, refer to <http://www.hpe.com/networking/warrantysummary>

## Configuration

### Build To Order:

BTO is a standalone unit with no integration. BTO products ship standalone are not part of a CTO or Rack-Shippable solution.

Aruba 2620 24 Switch	J9623A
<ul style="list-style-type: none"><li>• 2 autosensing 10/100/1000 port(RJ-45)</li><li>• 24 autosensing 10/100 ports (RJ-45)</li><li>• 2 open mini-GBIC (SFP) slots</li><li>• min=0 \ max=2 SFP Transceivers</li><li>• 1U - Height</li></ul>	See Configuration <b>NOTE: 1, 2</b>
PDU CABLE NA/MEX/TW/JP	J9623A#B2B
<ul style="list-style-type: none"><li>• C15 PDU Jumper Cord (NA/MEX/TW/JP)</li></ul>	
PDU CABLE ROW	J9623A#B2C
<ul style="list-style-type: none"><li>• C15 PDU Jumper Cord (ROW)</li></ul>	
Aruba 2620 24 PPOE+ Switch	J9624A
<ul style="list-style-type: none"><li>• 2 autosensing 10/100/1000 port(RJ-45)</li><li>• 12 RJ-45 autosensing 10/100 ports</li><li>• 12 RJ-45 autosensing 10/100 PoE+ ports</li><li>• 2 open mini-GBIC (SFP) slots</li><li>• min=0 \ max=2 SFP Transceivers</li><li>• 1U - Height</li></ul>	See Configuration <b>NOTE: 1, 2</b>
PDU CABLE NA/MEX/TW/JP	J9624A#B2B
<ul style="list-style-type: none"><li>• C15 PDU Jumper Cord (NA/MEX/TW/JP)</li></ul>	
PDU CABLE ROW	J9624A#B2C
<ul style="list-style-type: none"><li>• C15 PDU Jumper Cord (ROW)</li></ul>	
Aruba 2620 24 PoE+ Switch	J9625A
<ul style="list-style-type: none"><li>• 2 autosensing 10/100/1000 port(RJ-45)</li><li>• 24 RJ-45 autosensing 10/100 PoE+ ports</li><li>• 2 open mini-GBIC (SFP) slots</li><li>• min=0 \ max=2 SFP Transceivers</li><li>• 1U - Height</li></ul>	See Configuration <b>NOTE: 1, 2</b>
PDU CABLE NA/MEX/TW/JP	J9625A#B2B

## Configuration

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

### PDU CABLE ROW

J9625A#B2C

- C15 PDU Jumper Cord (ROW)

### Aruba 2620 48 Switch

J9626A

- 2 RJ-45 autosensing 10/100/1000 port (RJ-45)
- 48 RJ-45 autosensing 10/100 ports (RJ-45)
- 2 open mini-GBIC (SFP) slots
- min=0 \ max=2 SFP Transceivers
- 1U - Height

See  
Configuration  
**NOTE: 1, 2**

### PDU CABLE NA/MEX/TW/JP

J9626A#B2B

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

### PDU CABLE ROW

J9626A#B2C

- C15 PDU Jumper Cord (ROW)

### Aruba 2620 48 PoE+ Switch

J9627A

- 48 RJ-45 autosensing 10/100 PoE+ ports
- 2 autosensing 10/100/1000 port (RJ-45)
- 2 open mini-GBIC (SFP) slots
- min=0 \ max=2 SFP Transceivers
- 1U - Height

See  
Configuration  
**NOTE: 1, 2**

### PDU CABLE NA/MEX/TW/JP

J9627A#B2B

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

### PDU CABLE ROW

J9627A#B2C

- C15 PDU Jumper Cord (ROW)

### Configuration Rules:

#### NOTE 1 The following Transceivers install into this Switch:

HPE X111 100M SFP LC FX Transceiver	J9054C
HPE X121 1G SFP LC LH Transceiver	J4860C
HPE X121 1G SFP LC LX Transceiver	J4859C
HPE X121 1G SFP LC SX Transceiver	J4858C
HP X122 1G SFP LC BX-D Transceiver	J9142B
HP X122 1G SFP LC BX-U Transceiver	J9143B
HPE X121 1G SFP RJ45 T Transceiver	J8177C



## Configuration

**NOTE 2** Localization required on orders without #B2B or #B2C options.

### Rack Level Integration CTO Models

#### Aruba 2620 24 Switch

- 2 autosensing 10/100/1000 port (RJ-45)
- 24 autosensing 10/100 ports (RJ-45)
- 2 open mini-GBIC (SFP) slots
- min=0 \ max=2 SFP Transceivers
- 1U - Height

J9623A

See  
Configuration  
**NOTE: 1, 2, 3**

#### PDU CABLE NA/MEX/TW/JP

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

J9623A#B2B

#### PDU CABLE ROW

- C15 PDU Jumper Cord (ROW)

J9623A#B2C

#### Aruba 2620 24 PPOE+ Switch

- 2 autosensing 10/100/1000 port (RJ-45)
- 12 RJ-45 autosensing 10/100 ports
- 12 RJ-45 autosensing 10/100 PoE+ ports
- 2 open mini-GBIC (SFP) slots
- min=0 \ max=2 SFP Transceivers
- 1U - Height

J9624A

See  
Configuration  
**NOTE: 1, 2, 3**

#### PDU CABLE NA/MEX/TW/JP

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

J9624A#B2B

#### PDU CABLE ROW

- C15 PDU Jumper Cord (ROW)

J9624A#B2C

#### Aruba 2620 24 PoE+ Switch

- 24 RJ-45 autosensing 10/100 PoE+ ports
- 2 autosensing 10/100/1000 port(RJ-45)
- 2 open mini-GBIC (SFP) slots
- min=0 \ max=2 SFP Transceivers
- 1U - Height

J9625A

See  
Configuration  
**NOTE: 1, 2, 3**

#### PDU CABLE NA/MEX/TW/JP

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

J9625A#B2B

## Configuration

PDU CABLE ROW	J9625A#B2C
<ul style="list-style-type: none"> <li>C15 PDU Jumper Cord (ROW)</li> </ul>	
Aruba 2620 48 Switch	J9626A
<ul style="list-style-type: none"> <li>48 autosensing 10/100 ports (RJ-45)</li> <li>2 autosensing 10/100/1000 port(RJ-45)</li> <li>2 open mini-GBIC (SFP) slots</li> <li>min=0 \ max=2 SFP Transceivers</li> <li>1U - Height</li> </ul>	See Configuration <b>NOTE: 1, 2, 3</b>
PDU CABLE NA/MEX/TW/JP	J9626A#B2B
<ul style="list-style-type: none"> <li>C15 PDU Jumper Cord (NA/MEX/TW/JP)</li> </ul>	
PDU CABLE ROW	J9626A#B2C
<ul style="list-style-type: none"> <li>C15 PDU Jumper Cord (ROW)</li> </ul>	
Aruba 2620 48 PoE+ Switch	J9627A
<ul style="list-style-type: none"> <li>48 RJ-45 autosensing 10/100 PoE+ ports</li> <li>2 autosensing 10/100/1000 port (RJ-45)</li> <li>2 open mini-GBIC (SFP) slots</li> <li>min=0 \ max=2 SFP Transceivers</li> <li>1U - Height</li> </ul>	See Configuration <b>NOTE: 1, 2, 3</b>
PDU CABLE NA/MEX/TW/JP	J9627A#B2B
<ul style="list-style-type: none"> <li>C15 PDU Jumper Cord (NA/MEX/TW/JP)</li> </ul>	
PDU CABLE ROW	J9627A#B2C
<ul style="list-style-type: none"> <li>C15 PDU Jumper Cord (ROW)</li> </ul>	

### Configuration Rules:

<b>NOTE 1</b>	<b>The following Transceivers install into this Switch:</b>	
	HPE X111 100M SFP LC FX Transceiver	J9054C
	HPE X121 1G SFP LC LH Transceiver	J4860C
	HPE X121 1G SFP LC LX Transceiver	J4859C
	HPE X121 1G SFP LC SX Transceiver	J4858C
	HP X122 1G SFP LC BX-D Transceiver	J9142B
	HP X122 1G SFP LC BX-U Transceiver	J9143B
	HPE X121 1G SFP RJ45 T Transceiver	J8177C

**NOTE 2** Localization required on orders without #B2B or #B2C options.

## Configuration

**NOTE 3** If this switch is factory installed in HP Universal Racks, Then the J9583A#0D1 is required.

**Remarks:** Drop down under power supply should offer the following options and results:  
Switch/Router/Power Supply to PDU Power Cord - #B2B in North America, Mexico, Taiwan, and Japan or #B2C ROW. (Watson Default B2B or B2C for Rack Level CTO)  
Switch/Router/Power Supply to Wall Power Cord - Localized Option (Watson Default for BTO and Box Level CTO)

## Internal Power Supplies

Power supplies included in base model.

Enter the following menu selections as integrated to the CTO Model X server above if order is factory built.

## Transceivers

### SFP Transceivers

HPE X111 100M SFP LC FX Transceiver	J9054C
HPE X121 1G SFP LC LH Transceiver	J4860C
HPE X121 1G SFP LC SX Transceiver	J4858C
HPE X121 1G SFP LC LX Transceiver	J4859C
HP X122 1G SFP LC BX-D Transceiver	J9142B
HP X122 1G SFP LC BX-U Transceiver	J9143B
HPE X121 1G SFP RJ45 T Transceiver	J8177C

## Cables

### Multi-Mode Cables

HPE LC to LC Multi-mode OM3 2-Fiber 0.5m 1-Pack Fiber Optic Cable	AJ833A
HPE LC to LC Multi-mode OM3 2-Fiber 1.0m 1-Pack Fiber Optic Cable	AJ834A
HPE LC to LC Multi-mode OM3 2-Fiber 2.0m 1-Pack Fiber Optic Cable	AJ835A
HPE LC to LC Multi-mode OM3 2-Fiber 5.0m 1-Pack Fiber Optic Cable	AJ836A
HPE LC to LC Multi-mode OM3 2-Fiber 15.0m 1-Pack Fiber Optic Cable	AJ837A

## Configuration

HPE LC to LC Multi-mode OM3 2-Fiber 30.0m 1-Pack Fiber Optic Cable	AJ838A
HPE LC to LC Multi-mode OM3 2-Fiber 50.0m 1-Pack Fiber Optic Cable	AJ839A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 1m Cable	QK732A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 2m Cable	QK733A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 5m Cable	QK734A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 15m Cable	QK735A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 30m Cable	QK736A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 50m Cable	QK737A

## Switch Enclosure Options

### Rack Mount Kit

System (std 0 // max 1) User Selection (min 1 // max 1) per switch enclosure

HPE X410 1U Universal 4-post Rackmount Kit	J9583A See Configuration <b>NOTE: 1</b>
--	--

### Configuration Rules:

**NOTE 1** Default with switch.

### External Redundant Power supplies

HPE ProCurve 630 Redundant and/or External Power Supply <ul style="list-style-type: none"> <li>Height = 1U</li> </ul>	J9443A See Configuration <b>NOTE: 1, 2, 4</b>
No Power Cord <ul style="list-style-type: none"> <li>No Localized Power Cord Selected</li> </ul>	J9443A#AC3
HPE 600 Redundant and External Power Supply <ul style="list-style-type: none"> <li>Height = 1U</li> </ul>	J8168A See Configuration <b>NOTE: 1, 3, 4</b>

### Configuration Rules:

**NOTE 1** See HPE Networking Rack Menu for integration details.

## Configuration

NOTE 2 Supported on J9625A, J9627A only.

NOTE 3 Supported on J9623A, J9624A, J9626A only.

NOTE 4 Localization required

## Technical Specifications

### Aruba 2620 24 Switch (J9623A)

<b>I/O ports and slots</b>	24 autosensing 10/100 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Media Type: Auto-MDIX; Duplex: half or full	
	2 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only	
	2 open mini-GBIC (SFP) slots	
<b>Additional ports and slots</b>	1 RJ-45 serial console port	
<b>Physical characteristics</b>	<b>Dimensions</b>	17.44(w) x 10(d) x 1.73(h) in (44.3 x 25.4 x 4.39 cm) (1U height)
	<b>Weight</b>	5.71 lb (2.59 kg) shipping weight
<b>Memory and processor</b>	<b>Processor</b>	PowerPC FreeScale 8313 @ 400 MHz, 512 MB flash; Packet buffer size: 1 MB, 512 MB SDRAM, 4 MB flash ROM
<b>Mounting and enclosure</b>	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); Horizontal surface mounting only	
<b>Performance</b>	<b>IPv6 Ready Certified</b>	
	<b>100 Mb Latency</b>	< 8.3 $\mu$ s (LIFO 64-byte packets)
	<b>1000 Mb Latency</b>	< 2.9 $\mu$ s (LIFO 64-byte packets)
	<b>Throughput</b>	up to 9.5 Mpps
	<b>Routing/Switching capacity</b>	12.8 Gbps
	<b>MAC address table size</b>	16000 entries
<b>Environment</b>	<b>Operating temperature</b>	32°F to 131°F (0°C to 55°C)
	<b>Operating relative humidity</b>	15% to 95%, noncondensing
	<b>Nonoperating/Storage temperature</b>	-40°F to 158°F (-40°C to 70°C)
	<b>Nonoperating/Storage relative humidity</b>	15% to 90% @ 149°F (65°C), noncondensing
	<b>Altitude</b>	up to 10,000 ft (3 km)
	<b>Acoustic</b>	Power: 0 dB, Pressure: 0 dB No Fan
<b>Electrical characteristics</b>	<b>Achieved Miercom Certified Green Award</b>	
	<b>Frequency</b>	50/60 Hz
	<b>Maximum heat dissipation</b>	95 BTU/hr (100.23 kJ/hr)
	<b>Voltage</b>	100 - 127 / 200 - 240 VAC, rated
	<b>Current</b>	0.4/0.3 A
	<b>Maximum power rating</b>	28 W
	<b>Idle power</b>	13.3 W
	<b>PoE power</b>	0 W
	<b>NOTES</b>	<p>Idle power is the actual power consumption of the device with no ports connected.</p> <p>Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports</p>

## Technical Specifications

plugged in, and all modules populated.

PoE power is the power supplied by the internal power supply. It is dependent on the type and quantity of power supplies and may be supplemented with the use of an external power supply (EPS).

<b>Safety</b>	EN 60950/IEC 60950; CAN/CSA 22.2 No. 60950; EN 60825; UL 60950																				
<b>Emissions</b>	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A																				
<b>Immunity</b>	<table> <tr> <td><b>EN</b></td> <td>EN 55024, CISPR 24</td> </tr> <tr> <td><b>ESD</b></td> <td>IEC 61000-4-2</td> </tr> <tr> <td><b>Radiated</b></td> <td>IEC 61000-4-3</td> </tr> <tr> <td><b>EFT/Burst</b></td> <td>IEC 61000-4-4</td> </tr> <tr> <td><b>Surge</b></td> <td>IEC 61000-4-5</td> </tr> <tr> <td><b>Conducted</b></td> <td>IEC 61000-4-6</td> </tr> <tr> <td><b>Power frequency magnetic field</b></td> <td>IEC 61000-4-8</td> </tr> <tr> <td><b>Voltage dips and interruptions</b></td> <td>IEC 61000-4-11</td> </tr> <tr> <td><b>Harmonics</b></td> <td>EN 61000-3-2, IEC 61000-3-2</td> </tr> <tr> <td><b>Flicker</b></td> <td>EN 61000-3-3, IEC 61000-3-3</td> </tr> </table>	<b>EN</b>	EN 55024, CISPR 24	<b>ESD</b>	IEC 61000-4-2	<b>Radiated</b>	IEC 61000-4-3	<b>EFT/Burst</b>	IEC 61000-4-4	<b>Surge</b>	IEC 61000-4-5	<b>Conducted</b>	IEC 61000-4-6	<b>Power frequency magnetic field</b>	IEC 61000-4-8	<b>Voltage dips and interruptions</b>	IEC 61000-4-11	<b>Harmonics</b>	EN 61000-3-2, IEC 61000-3-2	<b>Flicker</b>	EN 61000-3-3, IEC 61000-3-3
<b>EN</b>	EN 55024, CISPR 24																				
<b>ESD</b>	IEC 61000-4-2																				
<b>Radiated</b>	IEC 61000-4-3																				
<b>EFT/Burst</b>	IEC 61000-4-4																				
<b>Surge</b>	IEC 61000-4-5																				
<b>Conducted</b>	IEC 61000-4-6																				
<b>Power frequency magnetic field</b>	IEC 61000-4-8																				
<b>Voltage dips and interruptions</b>	IEC 61000-4-11																				
<b>Harmonics</b>	EN 61000-3-2, IEC 61000-3-2																				
<b>Flicker</b>	EN 61000-3-3, IEC 61000-3-3																				
<b>Management</b>	Aruba AirWave Network Management; IMC – Intelligent Management Center; Command-line interface; Web browser																				
<b>Services</b>	Refer to the Hewlett Packard Enterprise website at <a href="http://www.hpe.com/networking/services">http://www.hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.																				

### Aruba 2620 24 PPOE+ Switch (J9624A)

<b>I/O ports and slots</b>	<p>12 RJ-45 autosensing 10/100 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Media Type: Auto-MDIX; Duplex: half or full</p> <p>12 RJ-45 autosensing 10/100 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3at PoE+); Duplex: half or full</p> <p>2 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only</p> <p>2 open mini-GBIC (SFP) slots</p>												
<b>Additional ports and slots</b>	1 RJ-45 serial console port												
<b>Physical characteristics</b>	<table> <tr> <td><b>Dimensions</b></td> <td>17.44(w) x 10.0(d) x 1.73(h) in (44.30 x 25.4 x 4.39 cm) (1U height)</td> </tr> <tr> <td><b>Weight</b></td> <td>7.03 lb (3.19 kg)</td> </tr> </table>	<b>Dimensions</b>	17.44(w) x 10.0(d) x 1.73(h) in (44.30 x 25.4 x 4.39 cm) (1U height)	<b>Weight</b>	7.03 lb (3.19 kg)								
<b>Dimensions</b>	17.44(w) x 10.0(d) x 1.73(h) in (44.30 x 25.4 x 4.39 cm) (1U height)												
<b>Weight</b>	7.03 lb (3.19 kg)												
<b>Memory and processor</b>	<table> <tr> <td><b>Processor</b></td> <td>PowerPC FreeScale 8313 @ 400 MHz, 512 MB flash; Packet buffer size: 1 MB, 512 MB SDRAM, 4 MB flash ROM</td> </tr> </table>	<b>Processor</b>	PowerPC FreeScale 8313 @ 400 MHz, 512 MB flash; Packet buffer size: 1 MB, 512 MB SDRAM, 4 MB flash ROM										
<b>Processor</b>	PowerPC FreeScale 8313 @ 400 MHz, 512 MB flash; Packet buffer size: 1 MB, 512 MB SDRAM, 4 MB flash ROM												
<b>Mounting and enclosure</b>	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); Horizontal surface mounting only												
<b>Performance</b>	<table> <tr> <td><b>IPv6 Ready Certified</b></td> <td></td> </tr> <tr> <td><b>100 Mb Latency</b></td> <td>&lt; 8.3 μs (LIFO 64-byte packets)</td> </tr> <tr> <td><b>1000 Mb Latency</b></td> <td>&lt; 2.9 μs (LIFO 64-byte packets)</td> </tr> <tr> <td><b>Throughput</b></td> <td>up to 9.5 Mpps</td> </tr> <tr> <td><b>Routing/Switching capacity</b></td> <td>12.8 Gbps</td> </tr> <tr> <td><b>MAC address table size</b></td> <td>16000 entries</td> </tr> </table>	<b>IPv6 Ready Certified</b>		<b>100 Mb Latency</b>	< 8.3 μs (LIFO 64-byte packets)	<b>1000 Mb Latency</b>	< 2.9 μs (LIFO 64-byte packets)	<b>Throughput</b>	up to 9.5 Mpps	<b>Routing/Switching capacity</b>	12.8 Gbps	<b>MAC address table size</b>	16000 entries
<b>IPv6 Ready Certified</b>													
<b>100 Mb Latency</b>	< 8.3 μs (LIFO 64-byte packets)												
<b>1000 Mb Latency</b>	< 2.9 μs (LIFO 64-byte packets)												
<b>Throughput</b>	up to 9.5 Mpps												
<b>Routing/Switching capacity</b>	12.8 Gbps												
<b>MAC address table size</b>	16000 entries												

## Technical Specifications

<b>Environment</b>	<b>Operating temperature</b>	32°F to 131°F (0°C to 55°C)
	<b>Operating relative humidity</b>	15% to 95%, noncondensing
	<b>Nonoperating/Storage temperature</b>	-40°F to 158°F (-40°C to 70°C)
	<b>Nonoperating/Storage relative humidity</b>	15% to 90%, noncondensing
	<b>Altitude</b>	up to 10,000 ft (3 km)
	<b>Acoustic</b>	Power: 37.1 dB, Pressure: 25.9 dB
<b>Electrical characteristics</b>	<b>Achieved Miercom Certified Green Award</b>	
	<b>Frequency</b>	50/60 Hz
	<b>Maximum heat dissipation</b>	177 BTU/hr (186.74 kJ/hr), (switch only: 177 BTU/hr; combined switch + max. PoE devices: 679 BTU/hr)
	<b>Voltage</b>	100 - 127 / 200 - 240 VAC, rated
	<b>Current</b>	1.8/1.0 A
	<b>Maximum power rating</b>	38.5 W
	<b>Idle power</b>	22.0 W
	<b>PoE power</b>	128 W
	<b>NOTES</b>	<p>Idle power is the actual power consumption of the device with no ports connected.</p> <p>Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.</p> <p>PoE power is the power supplied by the internal power supply. It is dependent on the type and quantity of power supplies and may be supplemented with the use of an external power supply (EPS).</p>
	<b>Safety</b>	EN 60950/IEC 60950; CAN/CSA 22.2 No. 60950; EN 60825; UL 60950
<b>Emissions</b>	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A	
<b>Immunity</b>	<b>EN</b>	EN 55024, CISPR 24
	<b>ESD</b>	IEC 61000-4-2
	<b>Radiated</b>	IEC 61000-4-3
	<b>EFT/Burst</b>	IEC 61000-4-4
	<b>Surge</b>	IEC 61000-4-5
	<b>Conducted</b>	IEC 61000-4-6
	<b>Power frequency magnetic field</b>	IEC 61000-4-8
	<b>Voltage dips and interruptions</b>	IEC 61000-4-11
	<b>Harmonics</b>	EN 61000-3-2, IEC 61000-3-2
<b>Flicker</b>	EN 61000-3-3, IEC 61000-3-3	
<b>Management</b>	Aruba AirWave Network Management; IMC – Intelligent Management Center; Command-line interface; Web browser	
<b>Services</b>	Refer to the Hewlett Packard Enterprise website at <a href="http://www.hpe.com/networking/services">http://www.hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.	



## Technical Specifications

### Aruba 2620 24 PoE+ Switch (J9625A)

<b>I/O ports and slots</b>	24 RJ-45 autosensing 10/100 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3at PoE+); Media Type: Auto-MDIX; Duplex: half or full	
	2 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only	
	2 open mini-GBIC (SFP) slots	
<b>Additional ports and slots</b>	1 RJ-45 serial console port	
<b>Physical characteristics</b>	<b>Dimensions</b>	17.44(w) x 14.5(d) x 1.73(h) in (44.3 x 36.83 x 4.39 cm) (1U height)
	<b>Weight</b>	10.67 lb (4.84 kg) shipping weight
<b>Memory and processor</b>	<b>Processor</b>	Power PC FreeScale 8313 @ 400 MHz, 512 MB flash; Packet buffer size: 1 MB, 512 MB SDRAM, 4 MB flash ROM
<b>Mounting and enclosure</b>	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); Horizontal surface mounting only	
<b>Performance</b>	<b>IPv6 Ready Certified</b>	
	<b>100 Mb Latency</b>	< 8.3 $\mu$ s (LIFO)
	<b>1000 Mb Latency</b>	< 2.9 $\mu$ s (LIFO)
	<b>Throughput</b>	up to 9.5 Mpps
	<b>Routing/Switching capacity</b>	12.8 Gbps
	<b>MAC address table size</b>	16000 entries
<b>Environment</b>	<b>Operating temperature</b>	32°F to 131°F (0°C to 55°C)
	<b>Operating relative humidity</b>	15% to 95%, noncondensing
	<b>Nonoperating/Storage temperature</b>	-40°F to 158°F (-40°C to 70°C)
	<b>Nonoperating/Storage relative humidity</b>	15% to 90%, noncondensing
	<b>Altitude</b>	up to 10,000 ft (3 km)
	<b>Acoustic</b>	Power: 34.0 dB, Pressure: 29.7 dB
<b>Electrical characteristics</b>	<b>Achieved Miercom Certified Green Award</b>	
	<b>Frequency</b>	50/60 Hz
	<b>Maximum heat dissipation</b>	270 BTU/hr (284.85 kJ/hr), (switch only: 270 BTU/hr; combined switch + max. PoE devices: 1751 BTU/hr)
	<b>Voltage</b>	100 - 127 / 200 - 240 VAC, rated
	<b>Current</b>	4.9/2.5 A
	<b>Maximum power rating</b>	39.5 W
	<b>Idle power</b>	22.8 W
	<b>PoE power</b>	382 W

**NOTES** Idle power is the actual power consumption of the device with no ports connected.

Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.

PoE power is the power supplied by the internal power supply. It is dependent on the type and quantity of power supplies and may be

## Technical Specifications

supplemented with the use of an external power supply (EPS).

<b>Safety</b>	EN 60950/IEC 60950; CAN/CSA 22.2 No. 60950; EN 60825; UL 60950
<b>Emissions</b>	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A
<b>Immunity</b>	<p><b>EN</b> EN 55024, CISPR 24</p> <p><b>ESD</b> IEC 61000-4-2</p> <p><b>Radiated</b> IEC 61000-4-3</p> <p><b>EFT/Burst</b> IEC 61000-4-4</p> <p><b>Surge</b> IEC 61000-4-5</p> <p><b>Conducted</b> IEC 61000-4-6</p> <p><b>Power frequency magnetic field</b> IEC 61000-4-8</p> <p><b>Voltage dips and interruptions</b> IEC 61000-4-11</p> <p><b>Harmonics</b> EN 61000-3-2, IEC 61000-3-2</p> <p><b>Flicker</b> EN 61000-3-3, IEC 61000-3-3</p>
<b>Management</b>	Aruba AirWave Network Management; IMC – Intelligent Management Center; Command-line interface; Web browser
<b>Services</b>	Refer to the Hewlett Packard Enterprise website at <a href="http://www.hpe.com/networking/services">http://www.hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

### Aruba 2620 48 Switch (J9626A)

<b>I/O ports and slots</b>	48 autosensing 10/100 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Media Type: Auto-MDIX; Duplex: half or full
	2 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only
	2 open mini-GBIC (SFP) slots
<b>Additional ports and slots</b>	1 RJ-45 serial console port
<b>Physical characteristics</b>	<p><b>Dimensions</b> 17.44(w) x 10(d) x 1.73(h) in (44.30 x 25.4 x 4.39 cm) (1U height)</p> <p><b>Weight</b> 6.48 lb (2.94 kg) shipping weight</p>
<b>Memory and processor</b>	<b>Processor</b> Power PC FreeScale 8313 @ 400 MHz, 512 MB flash; Packet buffer size: 2 MB, 512 MB SDRAM, 4 MB flash ROM
<b>Mounting and enclosure</b>	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); Horizontal surface mounting only
<b>Performance</b>	<p><b>IPv6 Ready Certified</b></p> <p><b>100 Mb Latency</b> &lt; 8.3 <math>\mu</math>s (LIFO)</p> <p><b>1000 Mb Latency</b> &lt; 2.9 <math>\mu</math>s (LIFO)</p> <p><b>Throughput</b> up to 13.0 Mpps</p> <p><b>Routing/Switching capacity</b> 17.6 Gbps</p> <p><b>MAC address table size</b> 16000 entries</p>
<b>Environment</b>	<p><b>Operating temperature</b> 32°F to 131°F (0°C to 55°C)</p> <p><b>Operating relative humidity</b> 15% to 95%, noncondensing</p> <p><b>Nonoperating/Storage temperature</b> -40°F to 158°F (-40°C to 70°C)</p>

## Technical Specifications

	<b>Nonoperating/Storage relative humidity</b>	15% to 95%, noncondensing
	<b>Altitude</b>	up to 10,000 ft (3 km)
	<b>Acoustic</b>	Power: 36.5 dB, Pressure: 24.5 dB
<b>Electrical characteristics</b>	<b>Achieved Miercom Certified Green Award*</b>	
	<b>Frequency</b>	50/60 Hz
	<b>Maximum heat dissipation</b>	148 BTU/hr (156.14 kJ/hr)
	<b>Voltage</b>	100 - 127 / 200 - 240 VAC, rated
	<b>Current</b>	0.7/0.4 A
	<b>Maximum power rating</b>	43.5 W
	<b>Idle power</b>	19.4 W
	<b>NOTES</b>	<p>Idle power is the actual power consumption of the device with no ports connected.</p> <p>Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.</p>
<b>Safety</b>		EN 60950/IEC 60950; CAN/CSA 22.2 No. 60950; EN 60825; UL 60950
<b>Emissions</b>		FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A
<b>Immunity</b>	<b>EN</b>	EN 55024, CISPR 24
	<b>ESD</b>	IEC 61000-4-2
	<b>Radiated</b>	IEC 61000-4-3
	<b>EFT/Burst</b>	IEC 61000-4-4
	<b>Surge</b>	IEC 61000-4-5
	<b>Conducted</b>	IEC 61000-4-6
	<b>Power frequency magnetic field</b>	IEC 61000-4-8
	<b>Voltage dips and interruptions</b>	IEC 61000-4-11
	<b>Harmonics</b>	EN 61000-3-2, IEC 61000-3-2
	<b>Flicker</b>	EN 61000-3-3, IEC 61000-3-3
<b>Management</b>		Aruba AirWave Network Management; IMC – Intelligent Management Center; Command-line interface; Web browser
<b>Services</b>		Refer to the Hewlett Packard Enterprise website at <a href="http://www.hpe.com/networking/services">http://www.hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

### Aruba 2620 48 PoE+ Switch (J9627A)

<b>I/O ports and slots</b>	48 RJ-45 autosensing 10/100 PoE+ ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3at PoE+); Media Type: Auto-MDIX; Duplex: half or full
	2 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only
	2 open mini-GBIC (SFP) slots
<b>Additional ports and slots</b>	1 RJ-45 serial console port
<b>Physical characteristics</b>	<b>Dimensions</b> 17.44(w) x 14.50(d) x 1.73(h) in (44.30 x 36.83 x 4.39 cm) (1U height)

## Technical Specifications

	<b>Weight</b>	11.53 lb (5.23 kg) shipping weight
<b>Memory and processor</b>	<b>Processor</b>	PowerPC FreeScale 8313 @ 400 MHz, 512 MB flash; Packet buffer size: 2 MB, 512 MB SDRAM, 4 MB flash ROM
<b>Mounting and enclosure</b>		Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); Horizontal surface mounting only
<b>Performance</b>	<b>IPv6 Ready Certified</b>	
	<b>100 Mb Latency</b>	< 8.3 $\mu$ s (LIFO)
	<b>1000 Mb Latency</b>	< 2.9 $\mu$ s (LIFO)
	<b>Throughput</b>	up to 13.0 Mpps
	<b>Routing/Switching capacity</b>	17.6 Gbps
	<b>MAC address table size</b>	16000 entries
<b>Environment</b>	<b>Operating temperature</b>	32°F to 131°F (0°C to 55°C)
	<b>Operating relative humidity</b>	15% to 95%, noncondensing
	<b>Nonoperating/Storage temperature</b>	-40°F to 158°F (-40°C to 70°C)
	<b>Nonoperating/Storage relative humidity</b>	15% to 95%, noncondensing
	<b>Altitude</b>	up to 10,000 ft (3 km)
	<b>Acoustic</b>	Power: 34.0 dB, Pressure: 25.3 dB
<b>Electrical characteristics</b>	<b>Achieved Miercom Certified Green Award</b>	
	<b>Frequency</b>	50/60 Hz
	<b>Maximum heat dissipation</b>	325 BTU/hr (342.88 kJ/hr), (switch only: 325 BTU/hr; combined switch + max. PoE devices: 1833 BTU/hr)
	<b>Voltage</b>	100 - 127 / 200 - 240 VAC, rated
	<b>Current</b>	5.6/2.8 A
	<b>Maximum power rating</b>	54.9 W
	<b>Idle power</b>	29.6 W
	<b>PoE power</b>	382 W
	<b>NOTES</b>	<p>Idle power is the actual power consumption of the device with no ports connected.</p> <p>Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.</p> <p>PoE power is the power supplied by the internal power supply. it is dependent on the type and quantity of power supplies and may be supplemented with the use of an external power supply (EPS).</p>
<b>Safety</b>		EN 60950/IEC 60950; CAN/CSA 22.2 No. 60950; EN 60825; UL 60950
<b>Emissions</b>		FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A
<b>Immunity</b>	<b>EN</b>	EN 55024, CISPR 24
	<b>ESD</b>	IEC 61000-4-2
	<b>Radiated</b>	IEC 61000-4-3
	<b>EFT/Burst</b>	IEC 61000-4-4
	<b>Surge</b>	IEC 61000-4-5
	<b>Conducted</b>	IEC 61000-4-6

## Technical Specifications

<b>Power frequency magnetic field</b>	IEC 61000-4-8
<b>Voltage dips and interruptions</b>	IEC 61000-4-11
<b>Harmonics</b>	EN 61000-3-2, IEC 61000-3-2
<b>Flicker</b>	EN 61000-3-3, IEC 61000-3-3

**Management** Aruba AirWave Network Management; IMC – Intelligent Management Center; Command-line interface; Web browser

**Services** Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

### Standards and protocols (applies to all products in series)

**Device Management** RFC 1591 DNS (client)  
RFC 2576 (Coexistence between SNMP V1, V2, V3)  
RFC 2579 (SMIPv2 Text Conventions)  
RFC 2580 (SMIPv2 Conformance)  
RFC 3416 (SNMP Protocol Operations v2)  
RFC 3417 (SNMP Transport Mappings)  
HTML and telnet management

**General Protocols** IEEE 802.1D MAC Bridges  
IEEE 802.1p Priority  
IEEE 802.1Q VLANs  
IEEE 802.1s Multiple Spanning Trees  
IEEE 802.1v VLAN classification by Protocol and Port  
IEEE 802.1w Rapid Reconfiguration of Spanning Tree  
IEEE 802.3ad Link Aggregation Control Protocol (LACP)  
IEEE 802.3x Flow Control  
RFC 768 UDP  
RFC 783 TFTP Protocol (revision 2)  
RFC 792 ICMP  
RFC 793 TCP  
RFC 826 ARP  
RFC 854 TELNET  
RFC 868 Time Protocol  
RFC 951 BOOTP  
RFC 1058 RIPv1  
RFC 1350 TFTP Protocol (revision 2)  
RFC 1542 BOOTP Extensions  
RFC 1918 Address Allocation for Private Internet  
RFC 2030 Simple Network Time Protocol (SNTP) v4  
RFC 2131 DHCP  
RFC 2453 RIPv2  
RFC 3046 DHCP Relay Agent Information Option  
RFC 3575 IANA Considerations for RADIUS  
RFC 5905 Network Time Protocol Version 4: Protocol and Algorithms Specification

**IP Multicast** RFC 3376 IGMPv3 (host joins only)

## Technical Specifications

### IPv6

RFC 1981 IPv6 Path MTU Discovery  
RFC 2460 IPv6 Specification  
RFC 2464 Transmission of IPv6 over Ethernet Networks  
RFC 2710 Multicast Listener Discovery (MLD) for IPv6  
RFC 2925 Remote Operations MIB (Ping only)  
RFC 3019 MLDv1 MIB  
RFC 3315 DHCPv6 (client only)  
RFC 3484 Default Address Selection for IPv6  
RFC 3513 IPv6 Addressing Architecture  
RFC 3596 DNS Extension for IPv6  
RFC 3810 Multicast Listener Discovery Version 2 (MLDv2) for IPv6  
RFC 4022 MIB for TCP  
RFC 4113 MIB for UDP  
RFC 4251 SSHv6 Architecture  
RFC 4252 SSHv6 Authentication  
RFC 4253 SSHv6 Transport Layer  
RFC 4254 SSHv6 Connection  
RFC 4291 IP Version 6 Addressing Architecture  
RFC 4293 MIB for IP  
RFC 4419 Key Exchange for SSH  
RFC 4443 ICMPv6  
RFC 4541 IGMP & MLD Snooping Switch  
RFC 4861 IPv6 Neighbor Discovery  
RFC 4862 IPv6 Stateless Address Auto-configuration

### MIBs

RFC 1155 Structure & ID of Mgmt Info for TCP/IP Internets  
RFC 1213 MIB II  
RFC 1493 Bridge MIB  
RFC 1724 RIPv2 MIB  
RFC 2021 RMONv2 MIB  
RFC 2096 IP Forwarding Table MIB  
RFC 2578 Structure of Management Information Version 2 (SMIV2)  
RFC 2613 SMON MIB  
RFC 2618 RADIUS Client MIB  
RFC 2620 RADIUS Accounting MIB  
RFC 2665 Ethernet-Like-MIB  
RFC 2668 802.3 MAU MIB  
RFC 2674 802.1p and IEEE 802.1Q Bridge MIB  
RFC 2737 Entity MIB (Version 2)  
RFC 2863 The Interfaces Group MIB  
RFC 2925 Ping MIB  
RFC 4836 Managed Objects for 802.3 Medium Attachment Units (MAU)

### Network Management

IEEE 802.1AB Link Layer Discovery Protocol (LLDP)  
RFC 2819 Four groups of RMON: 1 (statistics), 2 (history), 3 (alarm) and 9 (events)  
RFC 3176 sFlow  
RFC 3411 SNMP Management Frameworks  
RFC 3412 Message Processing and Dispatching for the Simple Network Management Protocol (SNMP)  
RFC 3413 Simple Network Management Protocol (SNMP) Applications  
RFC 3414 User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3)  
RFC 3415 View-based Access Control Model (VACM) for the Simple Network Management Protocol (SNMP)  
RFC 3418 Management Information Base (MIB) for the Simple Network Management Protocol

---

## Technical Specifications

(SNMP)  
RFC 5424 Syslog Protocol  
ANSI/TIA-1057 LLDP Media Endpoint Discovery (LLDP-MED)  
SNMPv1/v2c/v3  
XRMON

### QoS/CoS

RFC 2474 DiffServ Precedence, including 8 queues/port  
RFC 2475 DiffServ Architecture  
RFC 2597 DiffServ Assured Forwarding (AF)  
RFC 2598 DiffServ Expedited Forwarding (EF)  
Ingress Rate Limiting

### Security

IEEE 802.1X Port Based Network Access Control  
RFC 1492 TACACS+  
RFC 2138 RADIUS Authentication  
RFC 2866 RADIUS Accounting  
Secure Sockets Layer (SSL)

## Accessories

### Aruba 2620 Switch Series accessories

#### Modules

HPE X121 1G SFP LC SX Transceiver	J4858C
HPE X121 1G SFP LC LX Transceiver	J4859C
HPE X121 1G SFP LC LH Transceiver	J4860C
HPE X121 1G SFP RJ45 T Transceiver	J8177C
HPE X111 100M SFP LC FX Transceiver	J9054C

#### Transceivers

HPE X111 100M SFP LC FX Transceiver	J9054C
HPE X132 10G SFP+ LC SR Transceiver	J9150A
HPE X132 10G SFP+ LC LR Transceiver	J9151A
HPE X132 10G SFP+ LC LRM Transceiver	J9152A
HPE X121 1G SFP LC LH Transceiver	J4860C
HPE X121 1G SFP LC SX Transceiver	J4858C
HPE X121 1G SFP LC LX Transceiver	J4859C
HPE X121 1G SFP RJ45 T Transceiver	J8177C
HPE X132 10G SFP+ LC ER Transceiver	J9153A
HPE X142 40G QSFP+ MPO SR4 Transceiver	JH231A
HPE X142 40G QSFP+ LC LR4 SM Transceiver	JH232A
HPE X142 40G QSFP+ MPO eSR4 300M Transceiver	JH233A

#### Cables

HPE LC to LC Multi-mode OM3 2-Fiber 0.5m 1-Pack Fiber Optic Cable	AJ833A
HPE LC to LC Multi-mode OM3 2-Fiber 1.0m 1-Pack Fiber Optic Cable	AJ834A
HPE LC to LC Multi-mode OM3 2-Fiber 2.0m 1-Pack Fiber Optic Cable	AJ835A
HPE LC to LC Multi-mode OM3 2-Fiber 5.0m 1-Pack Fiber Optic Cable	AJ836A
HPE LC to LC Multi-mode OM3 2-Fiber 15.0m 1-Pack Fiber Optic Cable	AJ837A
HPE LC to LC Multi-mode OM3 2-Fiber 30.0m 1-Pack Fiber Optic Cable	AJ838A
HPE LC to LC Multi-mode OM3 2-Fiber 50.0m 1-Pack Fiber Optic Cable	AJ839A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 1m Cable	QK732A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 2m Cable	QK733A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 5m Cable	QK734A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 15m Cable	QK735A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 30m Cable	QK736A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 50m Cable	QK737A

#### Mounting Kit

HPE X410 1U Universal 4-post Rackmount Kit	J9583A
--	--------



## Accessories

## Accessory Product Details

<b>HPE X121 1G SFP LC SX Transceiver</b> (J4858C)	<b>Ports</b> <b>Physical characteristics</b>	1 LC 1000BASE-SX port; Duplex: full only Dimensions: 2.24(d) x 0.54(w) x 0.48(h) in. (5.69 x 1.37 x 1.22 cm) Weight: 0.04 lb. (0.02 kg) Transceiver form factor: SFP
A small form-factor pluggable (SFP) Gigabit SX transceiver that provides a full-duplex Gigabit solution up to 550 m on multimode fiber.	<b>Environment</b>	Operating temperature: 32°F to 158°F (0°C to 70°C) Operating relative humidity: 5% to 85%, noncondensing Nonoperating/Storage temperature: -40°F to 203°F (-40°C to 85°C) Altitude: up to 10,000 ft. (3 km)
	<b>Electrical characteristics</b>	Power consumption typical: 0.4 W Power consumption maximum: 0.7 W
	<b>Cabling</b>	Type: <ul style="list-style-type: none"> <li>• 62.5/125 <math>\mu\text{m}</math> or 50/125 <math>\mu\text{m}</math> (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively;</li> </ul>
		Maximum distance: <ul style="list-style-type: none"> <li>• 2-220 m (62.5 <math>\mu\text{m}</math> core diameter, 160 MHz*km bandwidth)</li> <li>• 2-275 m (62.5 <math>\mu\text{m}</math> core diameter, 200 MHz*km bandwidth)</li> <li>• 2-500 m (50 <math>\mu\text{m}</math> core diameter, 400 MHz*km bandwidth)</li> <li>• 2-550 m (50 <math>\mu\text{m}</math> core diameter, 500 MHz*km bandwidth)</li> </ul>
	<b>Services</b>	Cable length: 2-550m Fiber type: Multi Mode Refer to the Hewlett Packard Enterprise website at <a href="http://www.hpe.com/networking/services">http://www.hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

---

<b>HPE X121 1G SFP LC LX Transceiver</b> (J4859C)	<b>Ports</b> <b>Physical characteristics</b>	1 LC 1000BASE-LX port (IEEE 802.3z Type 1000BASE-LX); Duplex: full only Dimensions: 2.24(d) x 0.54(w) x 0.486(h) in. (5.69 x 1.37 x 1.23 cm) Weight: 0.04 lb. (0.02 kg)
HP X121 1G SFP LC LX Transceiver: An SFP format gigabit transceiver with LC connectors using LX technology.	<b>Environment</b>	Operating temperature: 32°F to 158°F (0°C to 70°C) Operating relative humidity: 0% to 85%, noncondensing Nonoperating/Storage temperature: -40°F to 212°F (-40°C to 100°C) Altitude: up to 10,000 ft. (3 km)
	<b>Cabling</b>	Type: <ul style="list-style-type: none"> <li>• Either single mode or multimode; 62.5/125 <math>\mu\text{m}</math> or 50/125 <math>\mu\text{m}</math> (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively; Low metal content, single-mode fiber-optic, complying with ITU-T G.652 and ISO/IEC 793-2 Type B1;</li> </ul>

## Accessory Product Details

		Maximum distance:
		<ul style="list-style-type: none"> <li>• 2-550 m (multimode 62.5 <math>\mu\text{m}</math> core diameter, 500 MHz*km bandwidth)</li> <li>• 2-550 m (multimode 50 <math>\mu\text{m}</math> core diameter, 400 MHz*km bandwidth)</li> <li>• 2-550 m (multimode 50 <math>\mu\text{m}</math> core diameter, 500 MHz*km bandwidth)</li> <li>• 2-10,000 m (single-mode fiber)</li> </ul>
	<b>NOTES</b>	A mode conditioning patch cord may be needed in some multimode fiber installations. Wavelength: 1310nm Power Consumption: < 500mW Typical
	<b>Services</b>	Refer to the Hewlett Packard Enterprise website at <a href="http://www.hpe.com/networking/services">http://www.hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.
<b>HPE X121 1G SFP LC LH Ports Transceiver (J4860C)</b>	<b>Ports</b>	1 LC 1000BASE-LH port (no IEEE standard exists for 1550 nm optics); Duplex: full only
	<b>Physical characteristics</b>	Dimensions: 2.17(d) x 0.60(w) x 0.46(h) in. (5.5 x 1.53 x 1.18 cm) Weight: 0.04 lb. (0.02 kg)
A small form-factor pluggable (SFP) Gigabit LH transceiver that provides a full-duplex Gigabit solution up to 70 km on single-mode fiber.	<b>Environment</b>	Operating temperature: -40°F to 185°F (-40°C to 85°C) Operating relative humidity: 0% to 95% @ 77°F (25°C), noncondensing Nonoperating/Storage temperature: -40°F to 185°F (-40°C to 85°C) Altitude: up to 10,000 ft. (3 km)
	<b>Cabling</b>	Cable type: <ul style="list-style-type: none"> <li>• Low metal content, single-mode fiber-optic, complying with ITU-T G.652 and ISO/IEC 793-2 Type B1;</li> </ul>
		Maximum distance: <ul style="list-style-type: none"> <li>• 10-70,000 m (single-mode fiber)</li> </ul>
	<b>NOTES</b>	Power consumption is 0.8 watts typical with 1 watt maximum at 100% utilization. For distances less than 20 km, a 10 dB attenuator must be used. For distances between 20 km and 40 km, a 5 dB attenuator must be used. Attenuators can be purchased from most cable vendors.
	<b>Services</b>	Refer to the Hewlett Packard Enterprise website at <a href="http://www.hpe.com/networking/services">http://www.hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.
<b>HPE X121 1G SFP RJ45 T Transceiver (J8177C)</b>	<b>Ports</b>	1 RJ-45 1000BASE-T port (IEEE 802.3ab Type 1000BASE-T); Duplex: full only
	<b>Physical characteristics</b>	Dimensions: 2.71(d) x 0.54(w) x 0.55(h) in. (6.88 x 1.37 x 1.4 cm) Weight: 0.06 lb. (0.03 kg)
HP X121 1G SFP RJ45 T Transceiver: An SFP	<b>Environment</b>	Operating temperature: 32°F to 158°F (0°C to 70°C); with 100 LFM

## Accessory Product Details

format gigabit transceiver with RJ45 connectors using 1000BaseT technology.	airflow over the SFP module Operating relative humidity: 0% to 95% @ 75°F (25°C), noncondensing Nonoperating/Storage temperature: -40°F to 185°F (-40°C to 85°C) Nonoperating/Storage relative humidity: 0% to 95% @ 77°F (25°C), noncondensing Altitude: up to 10,000 ft. (3000 km)
<b>Cabling</b>	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 Û differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T;  Maximum distance: <ul style="list-style-type: none"> <li>• 100 m</li> </ul>
<b>NOTES</b>	<p style="color: #c00000;">Power consumption is nominally 1 watt. For supported platforms and minimum software requirements to support this product, see the document titled "Support for the J8177C 1000Base-T Mini-GBIC" on the "HPE Mini-GBICs and SFPs" Manuals Web page. The J8177C Gigabit copper mini-GBIC is not supported on dual- personality ports. The J8177C is capable of 100 Mb operation. This is supported on only the HPE E8200zl, E5400zl, and HPE E6200-24G-mGBIC yl Switches using software version K.12.21 or later. Use the "auto-100" port setting to enable 100 Mb operation. Important: The earlier J8177B does not support 100 Mb operation. When used in the Switch gl 20-Port 10/100/1000 Module (J4908A), the J8177C mini-GBIC can be installed in either the upper or lower mini- GBIC port, but will block access to the other port.</p>
<b>Services</b>	Refer to the Hewlett Packard Enterprise website at <a href="http://www.hpe.com/networking/services">http://www.hpe.com/networking/services</a> for details on the service- level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

---

<b>HPE X111 100M SFP LC FX Transceiver (J9054C)</b>	1 LC 100BASE-FX port (IEEE 802.3u Type 100BASE-FX); Duplex: half or full
<b>Physical characteristics</b>	Dimensions: 2.7(d) x 0.54(w) x 0.48(h) in. (6.86 x 1.38 x 1.22 cm) Weight: 0.06 lb. (0.03 kg)
<b>Environment</b>	Operating temperature: 32°F to 158°F (0°C to 70°C) Operating relative humidity: 5% to 95% Nonoperating/Storage temperature: -40°F to 185°F (-40°C to 85°C) Nonoperating/Storage relative humidity: 5% to 85% Altitude: up to 10,000 ft. (3 km)
<b>Cabling</b>	Type: <ul style="list-style-type: none"> <li>• 62.5/125 µm or 50/125 µm (core/cladding) diameter, graded- index, low metal content, multimode fiber optic, complying with</li> </ul>

## Accessory Product Details

ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively

Maximum distance:

- 2 km (full duplex) or 412 m (half duplex)

### NOTES

Transmitter wavelength: 1310nm  
Power consumption is 1.1 watt maximum.

For supported platforms and minimum software requirements to support this product, see the document titled "Support for the J9054C 100-FX SFP-LC Transceiver" on the "HPE Mini-GBICs and SFPs" Manuals Web page.

### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

### HP X122 1G SFP LC BX-D Transceiver (J9142B)

A small form-factor pluggable (SFP) Gigabit-BX (bi-directional) "downstream" transceiver that provides a full-duplex Gigabit solution up to 10 km on one strand of single-mode fiber. The J9142B connects to the J9143B "upstream" transceiver, or to any IEEE-standard 1000BASE-BX10-U ("upstream") device.

### Ports

1 LC 1000BASE-BX10 port (IEEE 802.3ah Type 1000BASE-BX10-D); Duplex: full only

### Physical characteristics

#### Dimensions

2.19(d) x 0.54(w) x 0.46(h) in. (5.57 x 1.37 x 1.18 cm)

#### Weight

0.04 lb. (0.02 kg)

### Environment

#### Operating temperature

32°F to 158°F (0°C to 70°C)

#### Operating relative humidity

0% to 95%, non-condensing

#### Non-operating/Storage temperature

-40°F to 185°F -40°C to 85°C

### Cabling

Type:

Single-mode fiber optic, complying with ITU-T G.652;

Maximum distance:

- 0.5-10,000 m (single-mode fiber)

### NOTES

Transmit wavelength: 1490 nm. Receive wavelength: 1310 nm.  
Power consumption is 1 watt maximum.

For supported platforms and minimum software requirements to support this product, see the document titled "Support for the HPE BX Transceivers" on the "HPE Mini-GBICs and SFPs" Manuals Web page. The J9142B connects to the J9143B "upstream" transceiver, or to any IEEE-standard 1000BASE-BX10-U ("upstream") device. (A 1000-BX-D transceiver can only connect to a 1000-BX-U product. You cannot connect two 1000-BX-D transceivers together.)

### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

### HP X122 1G SFP LC BX- Ports

1 LC 1000BASE-BX10 port (IEEE 802.3ah Type 1000BASE-BX10-U);

## Accessory Product Details

### U Transceiver (J9143B)

A small form-factor pluggable (SFP) Gigabit-BX (bi-directional) "upstream" transceiver that provides a full-duplex Gigabit solution up to 10 km on one strand of single-mode fiber. The J9143B connects to the J9142B "downstream" transceiver, or to any IEEE-standard 1000BASE-BX10-D ("downstream") device.

	<b>Physical characteristics</b>	<b>Dimensions</b>	Duplex: full only 2.19(d) x 0.54(w) x 0.46(h) in. (5.57 x 1.37 x 1.18 cm)
		<b>Weight</b>	0.04 lb. (0.02 kg)
	<b>Environment</b>	<b>Operating temperature</b>	32°F to 158°F (0°C to 70°C)
		<b>Operating relative humidity</b>	0% to 95%, non-condensing
		<b>Non-operating/Storage temperature</b>	-40°F to 185°F -40°C to 85°C
	<b>Cabling</b>	Type:	Single-mode fiber optic, complying with ITU-T G.652;
		Maximum distance:	<ul style="list-style-type: none"> <li>0.5-10,000 m (single-mode fiber)</li> </ul>
	<b>NOTES</b>	<p>Transmit wavelength: 1310 nm. Receive wavelength: 1490 nm. For supported platforms and minimum software requirements to support this product, see the document titled "Support for the HPE BX Transceivers" on the "HPE Mini-GBICs and SFPs" Manuals Web page. The J9143B connects to the J9142B "downstream" transceiver, or to any IEEE-standard 1000BASE-BX10-D ("downstream") device. (A 1000-BX-U transceiver can only connect to a 1000-BX-D product. You cannot connect two 1000-BX-U transceivers together.) Power consumption is 1 watt maximum.</p>	
	<b>Services</b>	<p>Refer to the Hewlett Packard Enterprise website at <a href="http://www.hpe.com/networking/services">http://www.hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.</p>	

### HPE LC to LC Multi-mode OM3 2-Fiber 0.5m 1-Pack Fiber Optic Cable (AJ833A)

	<b>Cabling</b>	<b>Cable type:</b>	50/125 μm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m
		<b>Maximum distance:</b>	10Gbps Transfer Rate (Ethernet): 300m
	<b>NOTES</b>	<p>Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 μm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.</p> <ul style="list-style-type: none"> <li>Dimensions: Core diameter: 50 ± 3.0μm Cladding diameter: 125 ± 2.0μm Coating diameter: 245 ± 10μm</li> <li>Optical glass: Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.</li> <li>Optical glass: Bandwidth: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.</li> <li>CABLE: The cable is duplex zipcord graded index 50/125μm multimode optical fiber and designed to work in both the 850 and 1300 nm wavelength windows.</li> </ul>	

## Accessory Product Details

- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

**HPE LC to LC Multi-mode OM3 2-Fiber 1.0m 1-Pack Fiber Optic Cable (AJ834A)**

### Cabling

#### Cable type:

50/125  $\mu$ m (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m

#### Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

### NOTES

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125  $\mu$ m fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50  $\pm$  3.0 $\mu$ m Cladding diameter: 125  $\pm$  2.0 $\mu$ m Coating diameter: 245  $\pm$  10 $\mu$ m
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125 $\mu$ m multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

## Accessory Product Details

**HPE LC to LC Multi-mode OM3 2-Fiber 2.0m 1-Pack Fiber Optic Cable**  
(AJ835A)

### Cabling

#### Cable type:

50/125  $\mu\text{m}$  (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

#### Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

### NOTES

**Cable Specs:** Tight buffered duplex fiber optic multimode OM3 50/125  $\mu\text{m}$  fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter:  $50 \pm 3.0\mu\text{m}$  Cladding diameter:  $125 \pm 2.0\mu\text{m}$  Coating diameter:  $245 \pm 10\mu\text{m}$
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125 $\mu\text{m}$  multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

**HPE LC to LC Multi-mode OM3 2-Fiber 5.0m 1-Pack Fiber Optic Cable**  
(AJ836A)

### Cabling

#### Cable type:

50/125  $\mu\text{m}$  core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

#### Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

### NOTES

**Cable Specs:** This specification defines the detail requirements for a tight buffered duplex fiber optic multimode OM3 50/125  $\mu\text{m}$  fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter:  $50 \pm 3.0\mu\text{m}$  Cladding diameter:  $125 \pm 2.0\mu\text{m}$  Coating diameter:  $245 \pm 10\mu\text{m}$



## Accessory Product Details

- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125um multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

**HPE LC to LC Multi-mode OM3 2-Fiber 15.0m 1-Pack Fiber Optic Cable (AJ837A)**

### Cabling

#### Cable type:

50/125  $\mu$ m (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

#### Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

### NOTES

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125  $\mu$ m fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50  $\pm$  3.0um Cladding diameter: 125  $\pm$  2.0um Coating diameter: 245  $\pm$  10um
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125um multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @

## Accessory Product Details

- 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

**HPE LC to LC Multi-mode OM3 2-Fiber 30.0m 1-Pack Fiber Optic Cable** (AJ838A)

### Cabling

#### Cable type:

50/125  $\mu$ m (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

#### Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

### NOTES

**Cable Specs:** Tight buffered duplex fiber optic multimode OM3 50/125  $\mu$ m fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50  $\pm$  3.0 $\mu$ m Cladding diameter: 125  $\pm$  2.0 $\mu$ m Coating diameter: 245  $\pm$  10 $\mu$ m
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125 $\mu$ m multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

**HPE LC to LC Multi-mode OM3 2-Fiber 50.0m 1-Pack Fiber Optic Cable** (AJ839A)

### Cabling

#### Cable type:

50/125  $\mu$ m (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

#### Maximum distance:

## Accessory Product Details

### NOTES

10Gbps Transfer Rate (Ethernet): 300m

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 um fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0um Cladding diameter: 125 ± 2.0um Coating diameter: 245 ± 10um
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125um multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

### HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 1m Cable (QK732A) NOTES

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core Diameter: 50um ±3um, Cladding diameter: 125um ±2um; Coating diameter: 245 ± 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HPE PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise

## Accessory Product Details

sales office.

### HPE Premier Flex LC/LC NOTES Multi-mode OM4 2 fiber 2m Cable (QK733A)

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um ±3um, Cladding diameter: 125um ±2um; Coating diameter: 245 ± 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HPE PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

#### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

### HPE Premier Flex LC/LC NOTES Multi-mode OM4 2 fiber 5m Cable (QK734A)

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um ±3um, Cladding diameter: 125um ±2um; Coating diameter: 245 ± 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HPE PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

#### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

### HPE Premier Flex LC/LC NOTES Multi-mode OM4 2 fiber 15m Cable (QK735A)

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

## Accessory Product Details

- Core diameter: 50um  $\pm$ 3um, Cladding diameter: 125um  $\pm$ 2um; Coating diameter: 245  $\pm$  10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HPE PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

---

### HPE Premier Flex LC/LC NOTES Multi-mode OM4 2 fiber 30m Cable (QK736A)

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um  $\pm$ 3um, Cladding diameter: 125um  $\pm$ 2um; Coating diameter: 245  $\pm$  10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HPE PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

---

### HPE Premier Flex LC/LC NOTES Multi-mode OM4 2 fiber 50m Cable (QK737A)

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um  $\pm$ 3um, Cladding diameter: 125um  $\pm$ 2um; Coating diameter: 245  $\pm$  10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic

## Accessory Product Details

- **Boot Color:** White
- **Outer Jacket Print:** HPE PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- **Insertion Loss:** Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- **Maximum Cable Attenuation:** 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

### HPE X410 1U Universal 4-post Rackmount Kit (J9583A)

#### NOTES

The rack mounting kit supports the 1U, full width switches in the following switch series and the power supply: V1810 Series, E2510 Series, E2520 Series, E2610 Series, E2810 Series, E2910 Series, E3500 Series, and the E620 Power Supply

This universal rack mounting kit is design to fit the following racks: HPE 10K 10642, HPE 10K 10842, Panduit CN, Panduit CS, Wrightline Vantage S2, APC Netshelter 600mm, and APC Netshelter 800mm. It may well fit many other brands and models too.

#### Services

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

### HP 600 Redundant and External Power Supply (J8168A)

#### Ports

6 redundant power supply ports

Restrictions: Each port can provide redundant +12 V power to a connected switch; only one port can provide power at a given time

2 external power supply ports

Restrictions: Provides 50 VDC external PoE to up to two switch devices; provides max. of 408 W full power to one device, and half power (204 W each) if connected to two devices

#### Physical characteristics

**Dimensions** 12.83(d) x 17.44(w) x 1.73(h) in. (32.59 x 44.3 x 4.39 cm) (1U height)

**Weight** 11.78 lb. (5.34 kg), Fully loaded

#### Mounting

1U rack-mountable and wall-mountable enclosure using standard mounting hardware

#### Environment

**Operating temperature** 32°F to 131°F (0°C to 55°C)

**Operating relative humidity** 15% to 95% @ 104°F (40°C), noncondensing

**Nonoperating/Storage temperature** -40°F to 158°F (-40°C to 70°C)

**Nonoperating/Storage relative humidity** 15% to 95% @ 149°F (65°C), noncondensing

**Altitude** up to 15,000 ft. (4.6 km)

**Acoustic** Noise emission LwA=59.2 dB at virtual workspace, according to DIN 45635 T.19

#### Electrical characteristics Description

The unit automatically adjusts to any voltage between 100-240 V and either 50 or 60 Hz

**Voltage** 100-240 VAC

## Accessory Product Details

	<b>Current</b>	9/5 A
	<b>Maximum power rating</b>	800 W
	<b>RPS power</b>	180 W
	<b>PoE power</b>	408 W
	<b>Frequency</b>	50/60 Hz
	<b>NOTES</b>	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.
<b>Safety</b>		CSA 22.2 No. 60950; EN 60950/IEC 60950; UL 60950
<b>Emissions</b>		FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A
<b>Immunity</b>	<b>EN</b>	EN 55024, CISPR 24
	<b>ESD</b>	IEC 61000-4-2; 4 kV CD, 8 kV AD
	<b>Radiated</b>	IEC 61000-4-3; 3 V/m
	<b>EFT/Burst</b>	IEC 61000-4-4; 1.0 kV (power line), 0.05 kV (signal line)
	<b>Surge</b>	IEC 61000-4-5; 1 kV/2 kV AC
	<b>Conducted</b>	IEC 61000-4-6; 3 V
	<b>Power frequency magnetic field</b>	IEC 61000-4-8; 1 A/m, 50 or 60 Hz
	<b>Voltage dips and interruptions</b>	IEC 61000-4-11; >95% reduction, 0.5 period; 30% reduction, 25 periods
	<b>Harmonics</b>	EN 61000-3-2, IEC 61000-3-2
	<b>Flicker</b>	EN 61000-3-3, IEC 61000-3-3
<b>Management</b>		Provides information via port interfaces of attached devices
<b>NOTES</b>		Supported devices <ul style="list-style-type: none"> <li>• HPE Switch 2600-PWR Series, Switch 2610 Series, Switch 2610-PWR Series, Switch 2800 Series, Switch 2810 Series, Switch 5300xl Series, Switch 3400cl Series, Switch 6400cl Series, and Secure Router 7000dl Series</li> </ul>
<b>Services</b>		Refer to the Hewlett Packard Enterprise website at <a href="http://www.hpe.com/networking/services">http://www.hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

<b>HPE ProCurve 630 Redundant and/or External Power Supply (J9443A)</b>	<b>Physical characteristics</b>	<b>Dimensions</b>	15(d) x 8.5(w) x 1.73(h) in. (38.1 x 21.59 x 4.39 cm) (1U height)
		<b>Weight</b>	7.9 lb. (3.58 kg)
	<b>Environment</b>	<b>Operating temperature</b>	32°F to 131°F (0°C to 55°C)
		<b>Operating relative humidity</b>	15% to 95% @ 104°F (40°C), noncondensing
		<b>Nonoperating/Storage temperature</b>	-40°F to 158°F (-40°C to 70°C)

## Accessory Product Details

	<b>Nonoperating/Storage relative humidity</b>	15% to 90% @ 149°F (65°C), noncondensing
	<b>Altitude</b>	up to 10,000 ft. (3 km)
	<b>Acoustic</b>	Power: 54.2 dB; ISO 7779, ISO 9296
<b>Electrical characteristics</b>	<b>Maximum heat dissipation</b>	535 BTU/hr (564.42 kJ/hr), for the actual 630 power supply. PoE-powered device heat dissipation assumed to be outside the 630 power supply.
	<b>Voltage</b>	100-127/200-240 VAC
	<b>Current</b>	8/4 A
	<b>Maximum power rating</b>	740 W
	<b>PoE power</b>	398 W
	<b>RPS power</b>	185 W
	<b>PoE power</b>	398 W
	<b>Frequency</b>	50/60 Hz
	<b>NOTES</b>	<p>Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.</p> <p>PoE Power is the power supplied by the internal power supply, it is dependent on the type and quantity of power supplies and may be supplemented with the use of an External Power Supply (EPS).</p> <p>200-240 V power cords shipped with the 630 power supply have a wall plug rated as close to 13 A as specific country standards allow.</p>
	<b>NOTES</b>	<p>The HPE 630 RPS/EPS supports the HPE 2910al and 3500yl-PoE+ Switches. The HPE Switch 5400zl Series is not supported.</p> <p>The 630 RPS/EPS includes two 2-m RPS/EPS cables, which can be used to carry either RPS or PoE+ power to the switch.</p> <p>Minimum software versions required: 2910al PoE+ switches require W.14.35 or later and 3500yl-PoE+ switches require K.14.52 or later</p>
	<b>Services</b>	<p>Refer to the Hewlett Packard Enterprise website at <a href="http://www.hpe.com/networking/services">http://www.hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.</p>

<b>HPE 620 Redundant/External Power Supply (J8696A)</b>	<b>Ports</b>	2 redundant power supply ports Restrictions: 195 W available per port
		2 external power supply ports Restrictions: 398 W available per port
	<b>Physical characteristics</b>	<b>Dimensions</b> 15.4(d) x 17.4(w) x 1.73(h) in. (39.12 x 44.2 x 4.39 cm) (1U height)
		<b>Weight</b> 15.2 lb. (6.89 kg)
	<b>Mounting and enclosure</b>	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only



## Accessory Product Details

<b>Environment</b>	<b>Operating temperature</b>	32°F to 131°F (0°C to 55°C)	
	<b>Operating relative humidity</b>	15% to 95% @ 104°F (40°C), noncondensing	
	<b>Nonoperating/Storage temperature</b>	-40°F to 158°F (-40°C to 70°C)	
	<b>Nonoperating/Storage relative humidity</b>	15% to 90% @ 149°F (65°C), noncondensing	
	<b>Altitude</b>	up to 10,000 ft. (3 km)	
	<b>Acoustic</b>	LwA per ISO 7779: 54.2 dB	
	<b>Electrical characteristics</b>	<b>Maximum heat dissipation</b>	400 BTU/hr (422 kJ/hr), for the actual 620 itself. PoE-powered device heat dissipation assumed to be outside the 620.
		<b>Voltage</b>	100-127/200-240 VAC
		<b>Current</b>	16/8 A
		<b>Maximum power rating</b>	1440 W
<b>RPS power</b>		390 W	
<b>PoE power</b>		796 W	
<b>RPS</b>		12 V	
<b>PoE</b>		-50 V	
<b>Frequency</b>		50/60 Hz	
<b>NOTES</b>		<p>Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.</p> <p>Above figures are for maximum RPS and PoE power being supplied to two switches simultaneously. 200 - 240 V power cords shipped with the 620 have a wall plug rated as close to 13 A as specific country standards allow.</p>	
<b>Safety</b>	CSA 22.2 No. 60950; EN 60950/IEC 60950; UL 60950		
<b>Emissions</b>	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A		
<b>Immunity</b>	<b>EN</b>	EN 55024, CISPR 24	
	<b>ESD</b>	IEC 61000-4-2	
	<b>Radiated</b>	IEC 61000-4-3	
	<b>EFT/Burst</b>	IEC 61000-4-4	
	<b>Surge</b>	IEC 61000-4-5	
	<b>Conducted</b>	IEC 61000-4-6	
	<b>Power frequency magnetic field</b>	IEC 61000-4-8	
	<b>Voltage dips and interruptions</b>	IEC 61000-4-11	
	<b>Harmonics</b>	EN 61000-3-2, IEC 61000-3-2	
	<b>Flicker</b>	EN 61000-3-3, IEC 61000-3-3	
<b>Management</b>	Unmanaged power supply; provides information via LEDs (LEDs repeated on front and back panel) or through port interfaces of attached devices		

---

## Accessory Product Details

**NOTES**

The 620 supports the HPE Switch 2900 Series (RPS) and 3500yl Series (RPS/PoE), as well as 6200yl (RPS) switches. The HPE Switch 5400zl Series is not supported.

The 620 includes four 2 m RPS/EPs cables. These cables can be used to carry either RPS or PoE power to the switch being powered.

**Services**

Refer to the Hewlett Packard Enterprise website at <http://www.hpe.com/networking/services> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

---

## Summary of Changes

Date	Version History	Action	Description of Change
30-Sep-2016	From Version 15 to 16	Changed	Adding #AC3 Option to J9565A on the Configuration section
06-June-2016	From Version 14 to 15	Changed	Product overview, Features and benefits, Technical Specifications updated. Product description updated.
08-Jan-2016	From Version 13 to 14	Changed	URLs updated
01-Dec-2015	From Version 12 to 13	Changed	QuickSpecs name changed to Aruba 2620 Switch Series Product overview, Features and benefits and Accessories updated.
01-Dec-2014	From Version 11 to 12	Changed	Updated Warranty and support, Technical Specifications and Product Overview,
09-Dec-2013	From Version 10 to 11	Changed	Changes made in the Overview, Technical Specifications, and Accessories sections.
11-Nov-2013	From Version 9 to 10	Changed	Configuration was revised, including adding OM4 cables.
02-Oct-2013	From Version 8 to 9	Changed	Corrections were made throughout the Configuration section.
11-Sep-2013	From Version 7 to 8	Changed	Configuration was revised.
19-Aug-2013	From Version 6 to 7	Changed	Configuration was revised.
10-Jun-2013	From Version 5 to 6	Added	OM4 cables were added.
22-Apr-2013	From Version 4 to 5	Added	Overview: Added an image.
25-Mar-2013	From Version 3 to 4	Added	Overview: Added Build to Order section to the Features and benefits section.
06-Jul-2012	From Version 2 to 3	Changed	Changes made in the Technical Specifications section.
14-Oct-2011	From Version 1 to 2	Added	HPE 620 Redundant/External Power Supply was added to Accessories IPv6 Ready Certification and Miercom Certified Green Award were added to Models



Sign up for updates



© Copyright 2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

To learn more, visit: <http://www.hpe.com/networking>

c04111491 - 14120 - Worldwide - V16 - 30-September-2016