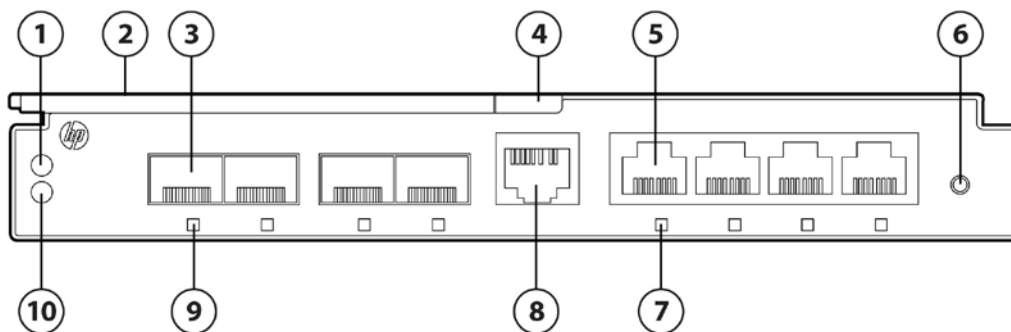


### Overview

### HPE 6125G/XG Ethernet Blade Switch

The innovative features of HPE Networking products are now available in a hybrid 1Gb/10Gb blade switch format. The HPE 6125G/XG brings the resiliency of IRF (Intelligent Resilient Networking) stacking and the stability of the Comware operating system to the c-Class BladeSystem. With sixteen 1Gb downlink (server) ports, a combination of 1Gb and 10Gb uplink ports, and a 10Gb cross-link port, the HPE 6125G/XG reduces cost, while increasing datacenter efficiency and capability. Switches can be combined at the enclosure, rack or datacenter level into a single virtual switch, and managed through a single IP address. Comware OS provides a common level of features, service and security levels from edge to core. And all network elements can be managed through IMC (Intelligent Management Center) providing comprehensive single pane provisioning of the entire network. Truly versatile, the HPE 6125G/XG supports IPv6, full layer 3 routing and distributed trunking. If you're looking for a switch that delivers excellent investment protection, flexibility, and scalability for mixed bandwidth applications, the 6125G/XG is the optimal choice for any data center.



**Figure 1 HPE 6125G/XG Blade Switch**

- |   |  |
|---|--|
| 1. Unit ID (UID) LED                            | 6. Reset button                        |
| 2. Ejector lever                                | 7. 10/100/1000Base-T Ethernet port LED |
| 3. SFP+ port                                    | 8. Console port                        |
| 4. Release tab                                  | 9. SFP+ port LED                       |
| 5. 10/100/1000Base-T auto-sensing Ethernet port | 10. Health LED                         |

### Models

HPE 6125G/XG Ethernet Blade Switch	658250-B21
HPE 6125G/XG Ethernet Blade Switch with TAA	737226-B21

### Compatibility

<b>HPE ProLiant Servers</b>	HPE ProLiant BL2x220c G7
	HPE ProLiant BL2x220c G5
	HPE ProLiant BL260c G5
	HPE ProLiant BL280c G6
	HPE ProLiant BL420c Gen8
	HPE ProLiant BL460c Gen9
	HPE ProLiant BL460c Gen8
	HPE ProLiant BL460c G7
	HPE ProLiant BL460c G6
	HPE ProLiant BL460c G5

## Overview

HPE ProLiant BL460c  
HPE ProLiant BL465c Gen8  
HPE ProLiant BL465c G7  
HPE ProLiant BL465 G6  
HPE ProLiant BL465 G5  
HPE ProLiant BL465c  
HPE ProLiant BL480c  
HPE ProLiant BL490c G7  
HPE ProLiant BL490c G6  
HPE ProLiant BL495c G6  
HPE ProLiant BL495c G5  
HPE ProLiant BL660c Gen8  
HPE ProLiant BL660c Gen9  
HPE ProLiant BL620c G7  
HPE ProLiant BL680c G5  
HPE ProLiant BL680c G7  
HPE ProLiant BL685c G7  
HPE ProLiant BL685 G6  
HPE ProLiant BL685 G5  
HPE ProLiant BL685c  
HPE ProLiant WS460c Gen8  
HPE ProLiant WS460c Gen9

**NOTE: Some servers listed above may be discontinued.**

### HPE Integrity Servers

HPE Integrity BL860c Server Blade  
HPE Integrity BL860c i2 Server Blade  
HPE Integrity BL860c i4 Server Blade  
HPE Integrity BL870c Server Blade  
HPE Integrity BL870c i2 Server Blade  
HPE Integrity BL870c i4 Server Blade  
HPE Integrity BL890c i2 Server Blade  
HPE Integrity BL890c i4 Server Blade

**NOTE: Some servers listed above may be discontinued.**

### ProLiant BL c-Class Server Blade Enclosures

HPE BladeSystem c3000 Enclosure  
HPE BladeSystem c7000 Enclosure

## Standard Features

### Standard Features

#### Performance

- Non blocking architecture
- Wire speed switching and IPv4/IPv6 routing on all ports
- Separate 10Gb Internal cross connect between switches
- Combine up to 10 switches into a single virtual switch
- RJ45 ports support 1Gb
- SFP+ ports support either 1Gb or 10Gb depending on module inserted
- Any SFP+ port can be used for IRF connections
- Mix any combination of HPE 6125G and HP6125G/XG in a single IRF domain
- Store and Forward Switching
- Hardware-based wire-speed access control lists (ACLs)

#### Management

- Remote configuration and management through Web browser or CLI
- Secure Web-based management through HTTPS
- Standards based SNMP management via SNMPv1, v2c and v3
- OOBM via Onboard Administrator
- GUI Management via Intelligent Management Center
- RJ45 console port
- sFlow and RMON network monitoring
- Manager and operator privilege levels
- Command authorization via RADIUS
- Complete session logging for problem resolution
- LLDP Discovery protocol
- IPv6 management
- Dual flash images
- Multiple configuration files
- Syslog
- Network Time Protocol (NTP)

#### Management

- IEEE 802.1X user authentication
- MAC-based authentication with RADIUS server
- Access Control Lists (ACLs)
- Secure FTP
- STP Root Guard
- DHCP Protection from unauthorized DHCP servers
- IP Source Guard
- Dynamic ARP protection to prevent eavesdropping
- Guest VLAN
- Endpoint Admission Defense (EAD)
- RADIUS/TACACS+
- Secure management via SSHv2 and SNMPv3
- Unicast Reverse Path Forwarding (URPF)

#### Layer 2 Switching

- 32K MAC addresses
- 4094 VLANs

## Standard Features

- IEEE 802.1ad QinQ VLANs
- Jumbo packet support
- GVRP VLAN Registration Protocol
- Port Aggregation
- Spanning Tree Protocol, PVST, MSTP, RSTP, STP Root Guard
- Smart Link fast uplink failure recovery
- IP Multicast Snooping and data-driven IGMP
- Policy Based Routing

## Layer 3 Routing

- IPv4 routing protocols - static routes, RIP, OSPF and BGP
- IPv6 routing protocols - static routes, RIPng, OSPFv3 and BGP+
- IPv6 tunneling
- IP Multicast - PIM-SSM, PIM-DM, PIM-SM, IGMP for IPv4 and IPv6
- Equal-Cost Multipath (ECMP)
- Policy-based routing
- DHCP and DHCPv6 client
- VRRP

## Quality of Service (QoS)

- Advanced classifier-based QoS - classifies traffic using multiple match criteria based on Layer 2, 3 and 4 information; applies QoS policies such as priority level and rate limit to selected traffic on a per-port or per-VLAN basis
- Traffic policing - supports Committed Access Rate (CAR) and line rate
- Powerful QoS feature - creates traffic classes based on access control lists (ACL), IEEE 802.1p precedence, IP, DSCP or Type of Service (ToS) precedence; supports filter, redirect, mirror or remark; supports the following congestion actions: strict priority (SP) queuing, weighted round robin (WRR), weighted fair queuing (WFQ), and weighted random early discard (WRED)
- Storm restraint - allows limitation of broadcast, multicast, and unknown unicast traffic rate to cut down on unwanted broadcast traffic on the network

## Resiliency and High Availability

- Intelligent Resilient Fabric (IRF) - Creates virtual resilient switching fabrics, where two or more switches perform as a single Layer 2 switch and Layer 3 router; Switches do not have to be co-located and can be part of a disaster recovery system; Servers or switches can be attached using standard LACP for automatic load balancing and high availability; Simplifies network operation by eliminating Spanning Tree, ECMP and VRRP
- Device Link Detection Protocol (DLDP) - Monitors Link connectivity and shuts down ports at both ends if unidirectional traffic is detected
- Rapid Ring Protection Protocol (RRPP) - Connects multiple switches in a high-performance ring using standard Ethernet technology; traffic can be rerouted around the ring in less than 50 ms upon failure
- Smart Link - Allows 50 ms failover between links
- Virtual Router Redundancy Protocol (VRRP)

## Monitoring and Diagnostics

- OAM (802.3ah) - Detects data link layer problems in the "last mile"; monitors link status between two devices
- CFD (802.1ag) - Connectivity Fault Detection (CFD) provides L2 link OAM mechanism used for link connectivity detection and fault location
- Mirroring - Port mirroring enables traffic on a port to be simultaneously sent to a network analyzer for monitoring; Flow-based mirroring

## Security

- FIPS 140-2

## Standard Features

- IPsec
- IKE (Internet Key Exchange)
- Self-signed certificate for HTTPS
- Disable password recovery

---

## Service and Support

### Service and Support HPE Technology Services

When you buy HPE BladeSystem Options for your HPE BladeSystem, it is also good time to think about services. HPE Technology Services offers you technical consultants and support expertise to solve your most complex infrastructure problems, giving you one call to make, fast answers, and global reach. We help keep your business running, boost availability, and avoid downtime.

#### Protect your business beyond warranty with HPE Care Pack Services

HPE Care Pack services provide total care and support expertise with committed response choices designed to meet your IT and business needs.

HPE Foundation Care services offer scalable reactive support-packages for Hewlett Packard Enterprise industry-standard servers and software. You can choose the type and level of service that is most suitable for your IT and business needs. If you are running business critical environments, Hewlett Packard Enterprise offers Proactive Care. This service helps you deliver high levels of system availability through proactive service management and advanced technical response.

---

### Recommended HPE Care Pack Services for your HPE product

#### Recommended Services

#### 3-Year HPE 24x7 4 hour response, Proactive Care Service\*

This service gives you combined reactive and proactive support including rapid access to our Advanced Solution Center to manage and prevent problems and a Technical Support Specialist with a broad level of technical knowledge that will engage with additional technical expertise as needed from the Hewlett Packard Enterprise vast global resources.

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855EEE.pdf>

#### HPE Installation of ProLiant Add On Options Service

This easy-to-buy, easy-to-use HPE Care Pack service helps ensure that your new Hewlett Packard Enterprise hardware is installed smoothly, efficiently, and with minimal disruption of your IT and business operations

---

### Related HPE Care Pack Services to enhance your HPE product experience

#### Related Services

#### 3-Year HPE 6 hour Call to Repair Response, Proactive Care\*

Combined reactive and proactive support for hardware and software helping optimize your systems and delivering high levels of availability through proactive service management and advanced technical response. Hardware problem resolution to return the hardware in operating condition within 6 hours of the initial service request. A Technical Account Manager, as your single point of contact, will own your call or issue end to end until resolved.

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855EEE.pdf>

---

#### Additional Services HPE Proactive Select Service

Provides a flexible way to purchase Hewlett Packard Enterprise best-in-class consultancy and technical services. You can buy Proactive Select Service Credits when you purchase your hardware and then use the credits over the next 12 months. <http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA2-3842ENN.pdf>

**NOTE:** Additional HPE Care Pack services can be found at: <http://h20558.www2.hp.com/portal/site/cpc>

---

#### Insight Online/Insight Remote Support

HPE Insight Remote Support provides 24 X 7 remote monitoring, proactive notifications, and problem resolution. This comes at no additional cost with your Hewlett Packard Enterprise solution. Learn more about Insight Remote Support <http://www.hp.com/go/insightremotesupport> and Insight Online <http://h18013.www1.hp.com/products/servers/management/insight-online/index.html>

---

## Service and Support

**NOTE:** Insight Remote Support is a prerequisite for HPE Proactive Care referenced in Additional Services above.

---

**HPE Support Center** Personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers. Learn more <http://www.hp.com/go/hpsc>  
The HPE Support Center Mobile App allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.  
HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Care Pack or Hewlett Packard Enterprise contractual support agreement.  
**NOTE:** HPE Support Center Mobile App above is subject to local availability.

---

**Parts and materials** Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements. Supplies and consumable parts will not be provided as part of this service; standard warranty terms and conditions apply. Parts and components that have exceeded their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual or the technical product data sheet will not be provided, repaired or replaced as part of this service.

---

**Service Coverage** HPE Care Pack services for the c7000 and c3000 enclosures cover the HPE 6125G/XG Ethernet Blade Switch.

---

**For more information** To learn more on HPE BladeSystem services, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized ServiceONE Channel Partner. Or visit: <http://www.hpe.com/services/bladesystem>

---

**For more information** To learn more on services for HPE ESSN Options, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. Or visit: <http://www.hpe.com/services/proliant> or <http://www.hpe.com/services/bladesystem>

---

## Related Options

<b>SFP Options</b>	HPE X125 1G SFP LC LH40 1310nm Transceiver	JD061A
	HPE X120 1G SFP LC LH40 1550nm Transceiver	JD062A
	HPE X125 1G SFP LC LH70 Transceiver	JD063B
	HPE X120 1G SFP RJ45 T Transceiver	JD089B
	HPE X120 1G SFP LC SX Transceiver	JD118B
	HPE X120 1G SFP LC LX Transceiver	JD119B
	HP BladeSystem c-Class Virtual Connect 1G SFP RJ-45 Transceiver	453154-B21
	HP BladeSystem c-Class Virtual Connect 1G SFP SX Transceiver	453151-B21
<b>SFP+ Options</b>	HPE X130 10G SFP+ LC SR Transceiver	JD092B
	HPE X130 10G SFP+ LC LRM Transceiver	JD093B
	HPE X130 10G SFP+ LC LR Transceiver	JD094B
<b>Direct Attach Cables</b>	HPE FlexNetwork X240 10G SFP+ to SFP+ 0.65m Direct Attach Copper Cable	JD095C
	HPE FlexNetwork X240 10G SFP+ to SFP+ 1.2m Direct Attach Copper Cable	JD096C
	HPE FlexNetwork X240 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	JD097C
	HPE FlexNetwork X240 10G SFP+ to SFP+ 5m Direct Attach Copper Cable	JG081C
	HPE FlexNetwork X240 10G SFP+ SFP+ 7m Direct Attach Copper Cable	JC784C

**NOTE: The transceivers and cables listed above have been qualified and certified to work with this product. Transceiver and DAC cables from any manufacturer will be accepted, but they will not be supported by Hewlett Packard Enterprise.**

---

### Service and Support Hardware Services On-site Service

<b>Offerings</b>	HPE 3 year Proactive Care 24x7 c7000 Enclosure Service	U3C33E
	HPE 3 year Proactive Care Call to Repair c7000 Enclosure Service	U3C36E

#### Installation Services

HPE Installation of ProLiant Add On/In Options Service	UH745E
--	--------

**Additional HPE Care Pack services can be found at:**

**<http://h20558.www2.hp.com/portal/site/cpc>**

**NOTE: For more HPE BladeSystem information, customer/resellers can contact:**

**<http://www.hp.com/services/bladessystemservices>**



## Technical Specifications

<b>Shipping Dimensions</b>	<b>Length</b>	11.54 in (293 mm)	
	<b>Width</b>	14.57 in (370 mm)	
	<b>Height</b>	3.54 in (95 mm)	
<b>Shipping Weight</b>		1.9 kg (4.19 lbs)	
<b>Product Specifications Hardware</b>	<b>Performance</b>	44 Gbps uplink port bandwidth; 16 Gbps downlink (server) port bandwidth; 10Gbps cross-link bandwidth	
		Forwarding rate 1.5 million pps per Gigabit port, (64-byte packets) and 14.8 million pps per 10 Gig port	
		Non-blocking, full-wire speed for all connections Auto-MDI/MDIX, auto-negotiation and auto-sensing with full-duplex support.	
	<b>Forwarding Mode</b>	Store and forward	
	<b>MAC Addresses</b>	Supports 32K MAC addresses per switch in a BladeSystem Enclosure	
	<b>Forwarding Table Age Time</b>	10 to 1,000,000 seconds (default: 300 seconds) (Maximum age)	
	<b>VLAN IDs</b>	4094	
	<b>Jumbo Frame</b>	9220 Byte	
	<b>IGMP Groups</b>	1024	
	<b>Memory</b>	1 GB Main, 256MB flash and 3MB packet buffer	
	<b>Connectors and Cabling</b>	<b>Connector</b>	4 RJ-45 4 SFP+/SFP (1Gb/10Gb/IRF) 1 RJ45 Management
		<b>Cable Support</b>	FCC Class A ICES-003 Class A AS/NZS 3548 Class A VCCI Class A
		<b>Indicators</b>	Module health, amber/green Module locator (UID), blue 10/100/100Base-T port speed/link/activity, amber/green SFP port link/activity, green SFP+ port link/activity, green
		<b>Dimensions</b>	<b>Length</b>
	<b>Width</b>		7.5 in (192.79 mm)
	<b>Height</b>		1.1 in (27.94 mm)
<b>Weight</b>		1.32 kg (2.9 lbs)	
<b>Environmental Ranges</b>	<b>Temperature Range</b>	Operating 50° to 95° F (10° to 35° C) Non-operating -40° to 158° F (-40° to 70° C)	
	Relative Humidity (non-condensing)	Operating 5% to 95%	

## Technical Specifications

Power Specification	Power Requirements	41W
---------------------	--------------------	-----

### Standards Support General protocols

IEEE 802.1ag Service Layer OAM  
 IEEE 802.1D MAC Bridges  
 IEEE 802.1p Priority  
 IEEE 802.1Q VLANs  
 IEEE 802.1s (MSTP)  
 IEEE 802.1v VLAN classification by Protocol and Port  
 IEEE 802.1w Rapid Reconfiguration of Spanning Tree  
 IEEE 802.1X PAE  
 IEEE 802.3ad Link Aggregation Control Protocol (LACP)  
 IEEE 802.3ae 10-Gigabit Ethernet  
 IEEE 802.3x Flow Control  
 RFC 768 UDP  
 RFC 792 ICMP  
 RFC 793 TCP  
 RFC 826 ARP  
 RFC 854 TELNET  
 RFC 925 Multi-LAN Address Resolution  
 RFC 951 BOOTP  
 RFC 1058 RIPv1  
 RFC 1350 TFTP Protocol (revision 2)  
 RFC 1519 CIDR  
 RFC 1542 BOOTP Extensions  
 RFC 2131 DHCP  
 RFC 2453 RIPv2  
 RFC 3768 VRRP  
 RFC 4675 RADIUS VLAN & Priority  
 802.1r - GARP Proprietary Attribute Registration Protocol (GPRP)

### IP Multicast

RFC 2934 Protocol Independent Multicast MIB for IPv4  
 RFC 3376 IGMPv3 (host joins only)  
 RFC 3618 Multicast Source Discovery Protocol (MSDP)  
 RFC 3973 Draft 2 PIM Dense Mode  
 RFC 4601 PIM Sparse Mode

### IPv6

RFC 4443 ICMPv6  
 RFC 4541 IGMP & MLD Snooping Switch  
 RFC 4861 IPv6 Neighbor Discovery  
 RFC 4862 IPv6 Stateless Address Auto-configuration

### MIBs

IEEE 8021-PAE-MIB  
 IEEE 8021-CFM-MIB  
 IEEE 8023-LAG-MIB

## Technical Specifications

RFC 1213 MIB II  
 RFC 1493 Bridge MIB  
 RFC 1657 BGP-4 MIB  
 RFC 1724 RIPv2 MIB  
 RFC 1850 OSPFv2 MIB  
 RFC 2011 SNMPv2 MIB for IP  
 RFC 2013 SNMPv2 MIB for UDP  
 RFC 2096 IP Forwarding Table MIB  
 RFC 2233 Interface MIB  
 RFC 2273 SNMP-NOTIFICATION-MIB  
 RFC 2452 IPV6-TCP-MIB  
 RFC 2454 IPV6-UDP-MIB  
 RFC 2465 IPv6 MIB  
 RFC 2466 ICMPv6 MIB  
 RFC 2571 SNMP Framework MIB  
 RFC 2572 SNMP-MPD MIB  
 RFC 2573 SNMP-Notification MIB  
 RFC 2618 RADIUS Client MIB  
 RFC 2620 RADIUS Accounting MIB  
 RFC 2665 Ethernet-Like-MIB  
 RFC 2674 802.1p and IEEE 802.1Q Bridge MIB  
 RFC 2688 MAU-MIB  
 RFC 2787 VRRP MIB  
 RFC 2819 RMON MIB  
 RFC 2925 Ping MIB  
 RFC 2933 IGMP MIB  
 RFC 3414 SNMP-User based-SM MIB  
 RFC 3415 SNMP-View based-ACM MIB  
 RFC 3418 MIB for SNMPv3  
 RFC 3636 IEEE 802.3 MAU MIB  
 RFC 3826 AES for SNMP's USM MIB  
 RFC 4133 Entity MIB (Version 3)  
 RFC 4878 Ethernet OAM MIB  
 LLDP-EXT-DOT1-MIB  
 LLDP-EXT-DOT3-MIB  
 LLDP-MIB

---

### Safety and Compliance Safety Certifications

Complies with UL 60950-1, CAN/CSA C22.2 No. 60950-1 and EN 60950-1. UL certified.  
 CE Marking  
 RoHS 6/6 compliant

---

### Electromagnetic Emissions Certifications FCC Part 15 Class A

FCC Part 15 Class A  
 EN 55022: 1998 (CISPR22)  
 EN 55024: 1998 (CISPR24)  
 VCCI Class A  
 AS/NZS 3548 Class A CE  
 CNS 13438 Class A MIC  
 MIC

---

## Technical Specifications

---

**Environment-  
friendly Products  
and Approach****End-of-life  
Management and  
Recycling**

Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

---

## Summary of Changes

Date	Version History	Action	Description of Change
08-Apr-2016	From Version 9 to 10	Changed	Minor changes made on Standard Features, SKU descriptions updated.
17-Dec-2015	From Version 8 to 9	Changed	Overview and Related Options sections were updated.
15-Nov-2014	From version 7 to 8	Changed	Compatibility section was updated.
21-Oct-2014	From version 6 to 7	Changed	Service and Support, Service Coverage were revised
18-Apr-2014	From Version 5 to 6	Changed	Related Services was revised.
30-Sep-2013	From Version 4 to 5	Changed	Changes made in the Overview and Related Options sections only.
28-Jun-2013	From Version 3 to 4	Changed	Changes made in the Related Options section only.
15-Mar-2013	From Version 2 to 3	Changed	Changes made throughout the Standard Features Section- Added Security information Changes made in the Related Options Section- Added new part numbers and descriptions as well as deleted part numbers and descriptions
25-Sep-2012	From Version 1 to 2	Changed	Change made throughout the QuickSpecs.



**Sign up for updates**

★ Rate this document



© Copyright 2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are US registered trademarks of Microsoft Corporation.

c04111502 - 14428 - Worldwide - V10 - 08-April-2016