


### Overview

### HPE 3PAR StoreServ 20000 Storage

The HPE 3PAR StoreServ 20000 Storage family offers enterprise flash arrays ready for massive consolidation of today's most demanding workloads with greater than 3 million IOPS, sub-millisecond latencies, a 4X density advantage, and scalability to 24PB of usable capacity. The family's flash-first architecture features the HPE 3PAR Thin Express ASIC for silicon-based hardware acceleration of thin technologies, including inline deduplication to reduce acquisition and operational costs by up to 75% without compromising performance. A choice of models provide a range of options that support true convergence of block and file protocols, all-flash array performance, and the use of solid state drives (SSDs) with spinning media for unmatched versatility. Enhanced Tier-1 storage capabilities for always-on data access and fine-grained Quality of Service (QoS) controls ensure predictable service levels for all workload types while bi-directional data mobility enables virtually limitless elastic pools of storage to support the most rigorous on-demand infrastructure.

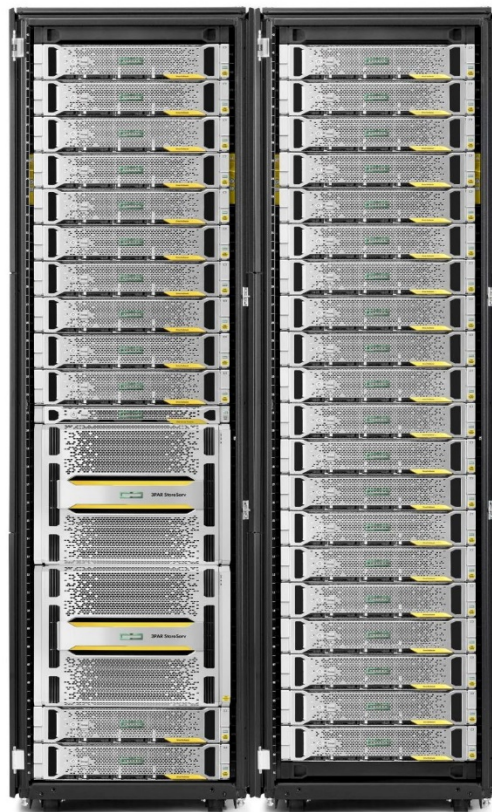

HPE 3PAR StoreServ 20000 Storage

### What's New

- More CPU cores and bigger cache on HPE 3PAR StoreServ 20800, 20840, 20850 models
- 256TiB per node pair usable file capacity
- G2 Enterprise Racks

Summary	20450	20800	20850	20840
Number of Controller Nodes	2 or 4		2, 4, 6, or 8	

## Overview

HPE 3PAR Gen5 ASICs	4 or 8	4, 8, 12 or 16		
Management Processors	4-8 x 8-Core 2.5 GHz	4-16 x 8-Core 2.5 GHz	4-16 x 10-Core 2.5 GHz	
Total Cache	0.9 – 1.8 TiB	0.6 – 34.5 TiB	0.9 – 3.6 TiB	0.9 – 51.6 TiB
Flash Cache (optional)	Not Applicable	0 - 32 TiB	Not Applicable	0 – 48 TiB
Max On-Node Cache	896 – 1792 GiB	640 – 2560 GiB	896 - 3584 GiB	896 – 3584 GiB
Maximum Host Ports	80 ports	160 ports		
16Gb/s Fibre Channel Host Ports <sup>1</sup>	0 – 80 ports	0 – 160 ports		
10Gb/s iSCSI Host Ports <sup>2</sup>	0 - 40 ports	0 – 80 ports		
10GbE Network Ports <sup>3</sup> for File Persona	0 – 24 ports	0 – 48 ports		
Built-in 10GbE Ports <sup>4</sup>	2 – 4 ports	2 - 8 ports		
Number of Hard Disk Drives	Not Applicable	6 - 2304 drives	Not Applicable	6 – 2304 drives
Number of Solid State Drives	6 – 576	6 – 1152	6 - 1152	6 - 1152
Raw Capacity	1.92 <sup>5</sup> - 4021 TiB <sup>6</sup>	1.92 <sup>5</sup> - 9600 TiB <sup>6</sup>	1.92 <sup>5</sup> - 8043 TiB <sup>6</sup>	1.92 <sup>5</sup> - 9600 TiB <sup>6</sup>
Raw Capacity (SSD Only)	1.92 <sup>5</sup> - 4021 TiB <sup>6</sup>	1.92 <sup>5</sup> - 8043 TiB <sup>6</sup>	1.92 <sup>5</sup> - 8043 TiB <sup>6</sup>	1.92 <sup>5</sup> - 8043 TiB <sup>6</sup>
Maximum usable file capacity <sup>7</sup>	2 – 512 TiB <sup>6</sup>	2 – 1024 TiB <sup>6</sup>		

### Capacity Details

RAID Levels	RAID 0, 1, 5, MP <sup>8</sup>			
RAID 5 Data to Parity Ratios	2:1 - 8:1			
RAID 6 Data to Parity Ratios	4:2, 6:2, 8:2, 10:2, 12:2, 14:2			
Drive Capacities (SSDs) <sup>9</sup>	400GB SSD, 920GB SSD, 1920GB SSD, 3840GB SSD, 7680GB SSD, 15360GB SSD			
Drive Capacities (HDDs)	Not Applicable	300 15K SAS <sup>10</sup> , 600 15K SAS <sup>10</sup> , 600 10K SAS <sup>10</sup> , 1200 10K SAS <sup>10</sup> , 1800 10K SAS <sup>10</sup> , 2000 7.2K SAS NL <sup>11</sup> , 4000 7.2K SAS NL <sup>11</sup> , 6000 7.2K SAS NL <sup>11</sup> , 8000 7.2K SAS NL <sup>11</sup>	Not Applicable	300 15K SAS <sup>10</sup> , 600 15K SAS <sup>10</sup> , 600 10K SAS <sup>10</sup> , 1200 10K SAS <sup>10</sup> , 1800 10K SAS <sup>10</sup> , 2000 7.2K SAS NL <sup>11</sup> , 4000 7.2K SAS NL <sup>11</sup> , 6000 7.2K SAS NL <sup>11</sup> , 8000 7.2K SAS NL <sup>11</sup>
Number of Drive Enclosures <sup>12</sup>	2 <sup>13</sup> – 48 enclosures	2 <sup>13</sup> - 96 enclosures		
Support for 3PAR StoreServ File Controller v3	Yes			

**NOTE:** Specifications are subject to change without notice

\*Based on 3.84TB SSDs and HPE 3PAR Compaction technologies that deliver 2:1 Thin capacity savings and 2:1 Deduplication capacity savings

1 Each port is full bandwidth 16 Gbit/s Fibre Channel capable as applicable

2 Each port is full bandwidth 10 Gbit/s iSCSI capable

3 Each port is full bandwidth 10 Gbit/s Ethernet designated for hosting File services and Object access protocols

4 Two built-in 10-GbE ports per node pair can be used for Remote Copy (RCIP); maximum of 8 usable; RCFC works out of the FC Host ports

5 Minimum raw capacity currently supported based on minimum of 4 SSDs per array

6 For storage capacity, 1 GiB = 2<sup>30</sup> bytes and 1 TiB = 1,024 GiB

7 Usable file capacity supported for HPE 3PAR File Persona

8 RAID MP is HPE 3PAR Fast RAID 6 Technology

9 SSDs are Solid State Drives

10 SAS drives are Serial Access SCSI Drives

## Overview

11 NL drives are Nearline (7.2k) Drives

12 Drive enclosures can be 24 x 2.5" drive 2U form factor or 12 x 3.5" drive 2U form factor

13 Recommended minimum is 4 drive enclosures per pair of controller nodes

---

## Host OS Support

Citrix® XenServer® | HP-UX® | IBM® AIX® | Microsoft® Windows® Server, including Microsoft® Hyper-V™ | Apple Mac OSX | OpenVMS\* | Oracle® Linux® (UEK and RHEL compatible kernels) | Oracle® Solaris | Ubuntu | VMware vSphere™ | Red Hat® Enterprise Linux® and Virtualization | SUSE® Linux® Enterprise and Virtualization | IBM Virtualization

For latest information on supported OS for HPE Storage Products refer <http://www.hpe.com/storage/spock>

### Service and Support

#### Warranty

3 Year, On-site Warranty Service. 24x7 4-hour onsite response

The warranty on all HPE 3PAR StoreServ 20000 Solid State Drives is 5 years, 24x7 4-hour onsite response. Please refer to the HPE 3PAR StoreServ 20000 Drives section for the complete list of SKUs

The warranty on all other HPE 3PAR StoreServ 20000 drives (SAS and NL SAS) is 3 years, 24x7 4-hour onsite response.

Hewlett Packard Enterprise warrants only that the Software media will be free of physical defects for a period of ninety (90) days from delivery.

For more information about Hewlett Packard Enterprise's Global Limited Warranty and Technical Support, visit: <http://www.hpe.com/storage/warranty>

**NOTE:** All currently available HPE 3PAR StoreServ SSDs carry a five-year warranty offering unconditional replacement in case of drive failure, media wear-out, or both.

**NOTE:** For Storage Base SKUs and Drive SKUs the warranty only covers the HW and not the All-inclusive software that is included with the same SKUs.

#### Service and Support

##### Protect your business beyond warranty with HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Our integrated portfolio of Services for storage help customers reduce costs, optimize data, streamline storage management, and improve backup and recovery. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new storage solution, giving you full entitlement for the support for need for your IT and business.

#### Connect your devices

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%<sup>1</sup> reduction in down time, near 100%<sup>2</sup> diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support.

1- IDC

2 - HPE CSC reports 2014 - 2015

### Recommended Services

#### Optimized Care

##### HPE Proactive Care Advanced\* - 24x7 coverage, three year Support Service

This services helps achieve a higher return on your product investment with personalized support from a local assigned Account Support Manager who will share best practice advice and personalized recommendations designed to help improve availability and performance to increase stability and reduce unplanned downtime. Leverage your system's ability to connect to Hewlett Packard Enterprise for pre-failure alerts, automatic call logging and parts dispatch. For business critical incidents, this service offers critical event management to reduce mean time to resolution. This recommendation provides 24x7 coverage with four-hour response for hardware and collaborative support that offers two-hour callback for supported software issues. Collaborative software management is included with independent software vendors unless you have your software support from Hewlett Packard Enterprise where we own all cases from start through to resolution.

<http://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA5-3259ENW>

#### Standard Care HPE Proactive Care\* with 24x7 coverage, three year Support Service + 20 services credits for 1<sup>st</sup> year

HPE Proactive Care gives customers an enhanced call experience plus helps preventing problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice when your products are connected to Hewlett Packard Enterprise. This Service combines three years' proactive reporting and advice with

## Service and Support

our 24x7 coverage, four hour hardware response time when there is a problem. <https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

**Basic Care** **HPE Proactive Care\* with 24x7 coverage, three year Support Service + 10 services credits per year**  
HPE Proactive Care gives customers an enhanced call experience plus helps preventing problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice when your products are connected to Hewlett Packard Enterprise. This Service combines three years' proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. <https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

**HPE 3PAR SSD Support** **3PAR SSD Extended Replacement Program**  
Provides for the post warranty replacement of eligible HPE 3PAR SSDs under active HPE support coverage in the event the SSD has reached its maximum usage limit based upon the HPE 3PAR SSD Life-Left reading. <http://h20195.www2.hpe.com/V2/GetPDF.aspx/a00000122ENW.pdf>

**HPE Services Support Credits** Services Support Credits offer flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

**NOTE:** \*HPE Proactive Care and HPE Proactive Care Advanced require that the customer connect their devices to make the most of these services and receive all the deliverables.

**Related Services** **HPE 3PAR StoreServ 8000, 9000, and 20000 Storage Installation and Startup Service** - Hewlett Packard Enterprise provides onsite deployment of your HPE 3PAR StoreServ 8000, 9000, and 20000 Storage arrays into your storage environment. This Service is included in all the levels of Care mentioned above. <http://h20195.www2.hpe.com/v2/GetPDF.aspx/4AA5-8035ENW.pdf>

**HPE 3PAR All-inclusive Multi-system Software Installation and Startup Service** - This service, which provides installation and startup for the HPE 3PAR Remote Copy, Peer Motion, and Peer Persistence functionality of HPE 3PAR All-inclusive Multi-system Software in your storage environment, is designed to help you get HPE 3PAR All-inclusive Multi-system Software up and running quickly and to provide a demonstration of the product's key features using sample or test data only <https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA6-6385ENW.pdf>

**HPE 3PAR All-inclusive Single-system Software Installation and Startup Service** - Complementing your new HPE 3PAR All-inclusive Single-system software, this service provides the necessary activities required to help you deploy Adaptive Optimization, Dynamic Optimization, File Persona, Priority Optimization, System Reporter, Virtual Copy, and an overview of Virtual Domain and Virtual Lock. For Virtual Copy, the service provides a demonstration of the product's key features using sample or test data only <https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA6-6549ENW.pdf>

**HPE 3PAR 8000, 9000, and 20000 Software Installation and Startup Service** – Designed to provide a smooth startup, this service provides deployment of individual HPE 3PAR 8000, 9000, and 20000 storage software features, helping to ensure proper installation in your storage environment as well as helping you increase the benefit from your storage investment. <http://h20195.www2.hpe.com/V2/GetPDF.aspx/4AA5-8036ENW.pdf>

**HPE 3PAR Peer Persistence Software Installation and Startup Service** – Provides implementation of the HPE 3PAR Peer Persistence Software feature. The service is designed to help get HPE 3PAR Peer Persistence up and running quickly and to provide a demonstration of the product's key features using sample or test data only. <http://h20195.www2.hpe.com/V2/GetPDF.aspx/4AA4-2772ENW.pdf>

## Service and Support

**HPE Storage Transformation Workshop** - Explore data management to business-aligned visions, covering cloud, object, end to end data protection and BC/DR.

<http://h20195.www2.hpe.com/V2/GetPDF.aspx/4AA4-9541ENW.pdf>

**HPE 3PAR StoreServ Data Migration** - Proven methodology, expertise and tools to help you migrate data across your data center or around the globe.

<http://h20195.www2.hpe.com/V2/GetPDF.aspx/4AA5-3759ENW.pdf>

**HPE Storage Modernization Service** - Modernize your storage environment to take better advantage of physical or virtualized server environments, all flash, cloud and object storage solutions.

<http://h20195.www2.hpe.com/v2/GetPDF.aspx/4AA5-8498ENW.pdf>

**Data Profiling Service** - Let TS Consulting assess your current file storage and identify redundant, obsolete and trivial data – simplifying your transformation to 3PAR and reducing migration costs.

**HPE StoreServ Integration Service** - Integrate your new HPE 3PAR StoreServ system so that it is agile, performs effectively, and scales to rapid growth.

<http://h20195.www2.hpe.com/V2/GetPDF.aspx/4AA4-9254ENW.pdf>

**HPE StoreServ Online Import Quick Start Service** - Choose the most effective, appropriate methods for configuring and migrating to a HPE 3PAR platform.

<http://h20195.www2.hpe.com/v2/getpdf.aspx/4AA6-0422ENW.pdf>

**HPE EVA to 3PAR Acceleration Service** - The HPE EVA to HPE 3PAR Acceleration Service provides customers with OPEX and CAPEX savings as a result of your journey from HPE EVA to HPE 3PAR StoreServ. This service provides customers with an alternative DIY ("do-it-yourself") data migration option with guidance from TS Consulting Storage migration specialists.

<http://h20195.www2.hpe.com/V2/GetPDF.aspx/4AA4-4234ENW.pdf>

**HPE SAN Deployment Service** - Hewlett Packard Enterprise delivers complete design and implementation services for Fibre Channel, FCoE, FCIP, SAS, and iSCSI SAN connectivity components.

<http://h20195.www2.hpe.com/V2/GetPDF.aspx/5981-8527EN.pdf>

**HPE Data Replication Solution Service for 3PAR Virtual Copy** - This service enables snapshots and mirroring to facilitate data restores, minimize downtime for backups, perform application testing and support data mining use with decision-support tools.

<http://h20195.www2.hpe.com/v2/GetPDF.aspx/4AA3-8107ENW.pdf>

**HPE Data Replication Solution Service for 3PAR Remote Copy** - HPE Data Replication Solution Service for 3PAR Remote Copy Software configures real-time data mirroring between local and remote 3PAR storage systems to safeguard critical business information <http://h20195.www2.hpe.com/V2/GetPDF.aspx/4AA3-8627ENW.pdf>

**HPE 3PAR Adaptive Optimization Policy Implementation Service** - Provides analysis, recommendations, and implementation of HPE 3PAR Adaptive Optimization policies to enable storage tiering using data collected from the HPE 3PAR Storage system over time.

<http://h20195.www2.hpe.com/V2/GetPDF.aspx/4AA2-3842ENW.pdf>

**HPE Storage Virtual Volume Design and Implementation Service** - When deploying an HPE Storage array, the HPE Virtual Volume Design and Implementation Service provides the necessary activities required to design and implement a new virtual volume configuration. <http://h20195.www2.hpe.com/V2/GetPDF.aspx/4AA2-3764ENW.pdf>

**HPE Thin Volume Conversion Service** - Provides evaluation and execution of conversion from standard to thin provisioned virtual volumes for HPE 3PAR Storage. A service specialist advises the customer on Hewlett Packard

## Service and Support

Enterprise thin provisioning best practices, provides evaluation of potential disk capacity savings if target virtual volumes are converted, and plans and implements thin conversion processing. The service leverages 3PAR thin provisioning capabilities to help optimize storage capacity, reduce cost, increase agility and maintain performance. <http://h20195.www2.hpe.com/V2/GetPDF.aspx/4AA2-3842ENW.pdf>

### **HPE Data Sanitization Storage and Server Services -**

These services provide the skilled resources and tools to help your organization address the need to protect data when your organization is retiring systems, upgrading storage and servers, returning leased equipment, or redeploying data storing devices. Using specialized software techniques, an HPE service specialist or authorized service partner will help ensure that data cannot be reconstructed or retrieved from hard disk media in your server and storage devices. These services offer you a smart alternative or augmentation to physical hardware destruction by executing procedures to remove data from disk media.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/5981-9510EN.pdf>

**HPE Performance Analysis Service for HPE Disk Arrays** - The service provides data collection, detailed I/O analysis and enhancement recommendations for HPE 3PAR StoreServ Storage disk arrays, HPE EVA P6000 Storage disk arrays and HPE XP Storage disk arrays. HPE Performance Analysis Service for HPE Storage Disk Arrays provides a single engagement concerning the performance of a single HPE Storage disk array <http://h20195.www2.hpe.com/V2/GetPDF.aspx/5982-6668EN.pdf>

**HPE 3PAR Performance and Capacity Trending Service** - HPE 3PAR Performance and Capacity Trending Service provides data collection, analysis, and reports with key performance and capacity metrics for your HPE 3PAR StoreServ array. Through this service, you will receive a specified number of reports describing long-term trends in performance and capacity usage, and have the option to purchase additional reports. You will also receive briefing sessions highlighting The Hewlett Packard Enterprise findings and recommendations. <http://h20195.www2.hpe.com/V2/GetPDF.aspx/4AA5-8792ENW.pdf>

**HPE 3PAR Health Check Service** - The HPE 3PAR Health Check service is delivered as a single engagement, providing data collection, analysis, report creation, and a briefing session concerning the performance of a single HPE 3PAR StoreServ Storage System. This health check service is best for HPE 3PAR StoreServ Storage Systems that have been installed and are in normal production mode. It can also be used to establish a baseline for future reference to improve the effective use of your storage system.

<http://h20195.www2.hpe.com/V2/GetPDF.aspx/4AA4-3404ENW.pdf>

**HPE 3PAR Rebalance Service** - The HPE 3PAR Rebalance Service helps balance data across your HPE 3PAR StoreServ Storage to take advantage of the capabilities of the array architecture. The service provides analysis, planning, and implementation of data movement and/or physical movement of drive magazines within the array. <http://h20195.www2.hpe.com/V2/GetPDF.aspx/4AA4-0280ENW.pdf>

### **For more information**

<http://www.hpe.com/services/storage>

To learn more on HPE Storage Services, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner

HPE Support Service Services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:

- Services for customers purchasing from Hewlett Packard Enterprise or an enterprise reseller are quoted using Hewlett Packard Enterprise order configuration tools.

Customers purchasing from a commercial reseller can find HPE Support Service Services at: <http://www.hpe.com/go/lookuptool>

## Configuration Information

### Step 1 - Choose a Base configuration

HPE 3PAR StoreServ 20000 configurations start with the selection of the Base. The Base includes the controller node chassis that determines how many controller nodes the storage array can scale to.

### HPE 3PAR StoreServ 20000 Base Configurations

HPE 3PAR StoreServ 20000 4-way Storage Configuration Base	C8S89B
HPE 3PAR 20800 R2 2-node Storage Base with All-inclusive Single-system Software	Q1H28A
HPE 3PAR 20840 R2 2-node Storage Base with All-inclusive Single-system Software	Q1H29A
HPE 3PAR 20850 R2 2-node Storage Base with All-inclusive Single-system Software	Q1H30A

- A minimum of one (1) configuration base must be ordered for each array
- C8S89B must be used to order a HPE 3PAR StoreServ 20450 Storage array and does not include any controller node with the chassis
- Q1H28A, Q1H31A, Q1H34A include the controller node chassis and two (2) controller nodes

### Step 2 - Choose a Controller Node

HPE 3PAR StoreServ 20000 Storage Controller Nodes determine the type of storage array that is required to be built. Each Controller Node consists of CPUs, ASICs, Cache banks and connectivity options for the storage array.

### HPE 3PAR StoreServ 20000 Controller Node Options

HPE 3PAR 20450 2x8 Core 2.5GHz 192GB/256GB Cache Node with All-inclusive Single-system Software	C8S90B
HPE 3PAR 20800 R2 2x8 Core 2.5GHz 192GB/128GB Cache Node with All-inclusive Single-system SW	Q1H31A
HPE 3PAR 20840 R2 2x10 Core 2.4GHz 192GB/256GB Cache Node with All-inclusive Single-system SW	Q1H32A
HPE 3PAR 20850 R2 2x10 Core 2.4GHz 192GB/256GB Cache Node with All-inclusive Single-system SW	Q1H33A

- Each Controller Node SKU represents a single (1) unit
- Each Controller Node SKU is loaded with All-inclusive Single-system Software
- Controller Nodes are always ordered in pairs on a HPE 3PAR StoreServ 20000 Storage array
- One (1), two (2), or three (3) pairs of 20800, 20840 or 20850 Controller Nodes can be ordered per array. Two (2) Controller Nodes are already included as part of the Storage Base SKUs (Q1H28A, Q1H31A, Q1H34A)
- One (1) or two (2) pairs of 20450 Controller Nodes can be ordered per array
- Each of the 20800, 20840, 20850 Controller Nodes (Q1H29A, Q1H32A, Q1H35A) includes two (2) SAS adapters
- The 20450 Controller Node (C8S90B) does not include any SAS adapter
- An array with Q1H29A nodes (20800) or Q1H32A nodes (20840) can be configured as a converged flash array with SSDs and HDDs
- An array with C8S90B nodes (20450) or Q1H35A nodes (20850) can be configured as an all flash array with SSDs only



## Configuration Information

- The four node types (C8S90B, Q1H29A, Q1H32A, Q1H35A) cannot be mixed within a single array
- The node configurations and base configuration, shown in the section above, have built-in Gigabit Ethernet ports for management and Remote Copy over IP
- For hardware-only controller SKUs (suffix "A"), refer to Appendix

### HPE 3PAR StoreServ 20000 Upgrade Controller Node Options

Use the HPE 3PAR StoreServ 20000 Upgrade Controller Nodes to increase the number of controller nodes on an existing previously installed HPE 3PAR StoreServ 20000 array. Increasing the controller nodes on an existing array helps improve resiliency, performance and increase scalability in a balanced fashion.

HPE 3PAR 20450 2x8 Core 2.5GHz 192GB/256GB Cache Upgrade Node with All-inclusive Single-system SW	C8S91B
HPE 3PAR 20800 R2 2x8 Core 2.5GHz 192GB/128GB Cache Upgrade Node with All-inclusive Single-system SW	Q1H34A
HPE 3PAR 20840 R2 2x10 Core 2.4GHz 192GB/256GB Cache Upgrade Node with All-inclusive Single-system SW	Q1H35A
HPE 3PAR 20850 R2 2x10 Core 2.4GHz 192GB/256GB Cache Node Upgrade with All-inclusive Single-system SW	Q1H36A

- Each Controller Node SKU represents a single (1) unit
- Each Controller Node SKU is loaded with All-inclusive Single-system Software
- Controller Nodes are always ordered in pairs on a HPE 3PAR StoreServ 20000 Storage array
- One (1), two (2), three (3) pairs of 20800, 20840 or 20850 Upgrade Controller Nodes can be ordered per array
- Only one (1) 20450 pair Upgrade Controller Nodes can be ordered per array
- Each of the 20800, 20840, 20850 Upgrade Controller Nodes (Q1H30A, Q1H33A, Q1H36A) includes two (2) SAS adapters
- The 20450 Upgrade Controller Node (C8S91B) does not include any SAS adapter
- An array with Q1H30A nodes (20800) or Q1H33A nodes (20840) can be configured as a converged flash array with SSDs and HDDs
- An array with C8S91B nodes (20450) or Q1H36A nodes (20850) can be configured as an all flash array with SSDs only
- The node configurations and base configuration, shown in the section above, have built-in Gigabit Ethernet ports for management and Remote Copy over IP

**NOTE:** The four different controller nodes cannot be mixed within a HPE 3PAR StoreServ 20000 Storage array. Care must be taken to ensure that the appropriate upgrade node is purchased while performing a node field upgrade for an existing 20000 array.

### Step 3 - Choose Drive Adapter

HPE 3PAR StoreServ 20000 Storage uses SAS Drive adapters for backend drive connectivity. These SAS HBAs can be ordered separately to be installed in the field or they can be factory configured into controller nodes. 1 SAS Drive Adapter on each node of a single node pair can connect up to 8 drive enclosures. Each of the 20800, 20840, 20850 Controller Nodes includes two (2) SAS adapters as part of the Node SKU. The 20450 Controller Nodes do not include any SAS adapter.

## Configuration Information

### HPE 3PAR StoreServ 20000 Drive Adapters

HPE 3PAR StoreServ 20000 4-port 12Gb SAS Host Bus Adapter	C8S93A
HPE 3PAR StoreServ 20000 4-port 12Gb SAS Upgrade Host Bus Adapter	C8S97A
<ul style="list-style-type: none"> <li>• For HPE 3PAR 20450, SAS Adapters must be ordered in addition to the base configurations and controller node configurations</li> <li>• For HPE 3PAR 20450 a minimum of two (2) SAS adapters must be configured per node or four (4) per node pair</li> <li>• For HPE 3PAR 20800, 20840, 20850, two (2) SAS adapters are included as part of each Controller Node SKU. A third optional SAS adapter can be ordered per Controller Node.</li> </ul>	

### Step 4 - Choose Host Adapter

Host adapters can be ordered separately to be installed in the field or they can be factory configured into controller nodes. Host adapter cards provide the array with additional FC ports, with 10Gb/sec iSCSI ports or 10Gb/sec Ethernet ports. The additional FC ports can be used for multiple purposes including connection to hosts and connection to other HPE 3PAR StoreServ Storage systems in a Remote Copy or Peer Motion relationship. The iSCSI ports permit host connection in iSCSI environments. The Ethernet ports can be used to natively host various File protocols and core file data services.

### HPE 3PAR StoreServ 20000 Host Adapters

HPE 3PAR StoreServ 20000 4-port 16Gb Fiber Channel Host Bus Adapter	C8S92A
HPE 3PAR StoreServ 20000 2-port 10Gb Converged Network Adapter	C8S94A
HPE 3PAR StoreServ 20000 2-port 10Gbps Ethernet Adapter for File Persona	C8S95A
HPE 3PAR StoreServ 20000 4-port 16Gb Fiber Channel Upgrade Host Bus Adapter	C8S96A
HPE 3PAR StoreServ 20000 2-port 10Gb Upgrade Converged Network Adapter	C8S98A
HPE 3PAR StoreServ 20000 2-port 10Gbps Upgrade Ethernet Adapter for File Persona	C8S99A

- iSCSI protocol is available through Converged Network Adapter

### Step 5 - Choose Drive Enclosures

Add drive enclosures to expand the configuration. Drive enclosures can be ordered separately for installation in the field, or they can be factory configured in a rack. There are two drive enclosures each supporting two different drive form factors. One drive enclosure supports twenty-four (24) small form factor 2.5" drives while the other supports twelve (12) large form factor 3.5" drives. The HPE 3PAR StoreServ 20800 Storage and HPE 3PAR StoreServ 20850 Storage support up to eighty (80) drive enclosures. The HPE 3PAR StoreServ 20450 Storage supports up to forty (40) drive enclosures. The two drive enclosure types can be intermixed in a single array.

### HPE 3PAR StoreServ 20000 Drive Enclosures

HPE 3PAR StoreServ 20000 12Gb SAS 24-disk 2U SFF(2.5in) Drive Enclosure	E7Y20A
HPE 3PAR StoreServ 20000 12Gb SAS 12-disk 2U LFF(3.5in) Drive Enclosure	E7Y21A
HPE 3PAR StoreServ 20000 12Gb SAS 24-disk 2U SFF(2.5in) Upgrade Drive Enclosure	E7Y22A
HPE 3PAR StoreServ 20000 12Gb SAS 12-disk 2U LFF(3.5in) Upgrade Drive Enclosure	E7Y23A

- A minimum of 2 drive enclosures is required per node pair for each form factor

## Configuration Information

### Step 6 - Choose Drives

Drives are orderable at the time the array is purchased, or can be added in the future when additional capacity is required. HPE 3PAR StoreServ 20000 drives are sold as single drives.

#### HPE 3PAR StoreServ 20000 Drives

<b>HPE 3PAR SSDs</b>	HPE 3PAR 20000 400GB SAS SFF (2.5in) SSD with All-inclusive Single-system Software	N9Y02B
	HPE 3PAR 20000 1.92TB SAS SFF (2.5in) SSD with All-inclusive Single-system Software	J8S13B
	HPE 3PAR 20000 3.84TB SAS SFF (2.5in) SSD with All-inclusive Single-system Software	K2R25B
	HPE 3PAR 20000 7.68TB SAS SFF (2.5in) SSD with All-inclusive Single-system Software	P9L79B
	HPE 3PAR 20000 15.36TB SAS SFF (2.5in) SSD with All-inclusive Single-system Software	P9M61B
<b>HPE 3PAR SAS HDDs</b>	HPE 3PAR 20000 300GB SAS 15K SFF (2.5in) HDD with All-inclusive Single-system Software	J8S05B
	HPE 3PAR 20000 600GB SAS 15K SFF (2.5in) HDD with All-inclusive Single-system Software	J8S06B
	HPE 3PAR 20000 600GB SAS 10K SFF (2.5in) HDD with All-inclusive Single-system Software	J8S07B
	HPE 3PAR 20000 1.2TB SAS 10K SFF (2.5in) HDD with All-inclusive Single-system Software	J8S08B
	HPE 3PAR 20000 1.8TB SAS 10K SFF (2.5in) HDD with All-inclusive Single-system Software	J8S09B
<b>HPE 3PAR NL SAS HDDs</b>	HPE 3PAR 20000 2TB SAS 7.2K SFF (2.5in) HDD with All-inclusive Single-system Software	M0S93B
	HPE 3PAR 20000 4TB SAS 7.2K LFF (3.5in) HDD with All-inclusive Single-system Software	K2Q38B
<b>HPE 3PAR FIPS 140-2 Encryption Drives</b>	HPE 3PAR 20000 920GB SFF (2.5in) FIPS Encrypted SSD with All-inclusive Single-system Software	J8S14B
	HPE 3PAR 20000 1.92TB SFF (2.5in) FIPS Encrypted SSD with All-inclusive Single-system Software	J8S15B
	HPE 3PAR 20000 3.84TB SFF (2.5in) FIPS Encrypted SSD with All-inclusive Single-system Software	M0T65B
	HPE 3PAR 20000 7.68TB SAS SFF (2.5in) FIPS Encrypted SSD with All-inclusive Single-system SW	P9L81B
	HPE 3PAR 20000 15.36TB SAS SFF (2.5in) FIPS Encrypted SSD with All-inclusive Single-system SW	P9M63B
	HPE 3PAR 20000 600GB SAS 15K SFF (2.5in) FIPS Encrypted HDD with All-inclusive Single-system SW	J8S16B
	HPE 3PAR 20000 1.2TB SAS 10K SFF (2.5in) FIPS Encrypted HDD with All-inclusive Single-system SW	J8S17B
	HPE 3PAR 20000 4TB SAS 7.2K LFF FIPS Encrypted HDD with All-inclusive Single-system Software	N9Y00B
	HPE 3PAR 20000 6TB SAS 7.2K LFF FIPS Encrypted HDD with All-inclusive Single-system Software	J8S18B

## Configuration Information

	HPE 3PAR 20000 8TB SAS 7.2K LFF FIPS Encrypted HDD with All-inclusive Single-system Software	P9B41B
<b>HPE 3PAR Encryption License</b>	HPE 3PAR 20800 Data Encryption LTU	L7C63A
	HPE 3PAR 20800 Data Encryption E-LTU	L7C63AAE
	HPE 3PAR 20450 Data Encryption LTU	L7C87A
	HPE 3PAR 20450 Data Encryption E-LTU	L7C87AAE
	HPE 3PAR 20850 Data Encryption LTU	L7D11A
	HPE 3PAR 20850 Data Encryption E-LTU	L7D11AAE
	HPE 3PAR 20840 Data Encryption Software LTU	L7E28A
	HPE 3PAR 20840 Data Encryption Software E-LTU	L7E28AAE

- An encrypted HPE 3PAR StoreServ array, i.e. any HPE 3PAR StoreServ array that has HPE 3PAR Data Encryption license activated or intended to be activated, must have only self-encrypted drives installed
- All other non-encrypted HPE 3PAR StoreServ arrays can have a mix of encrypted and non-encrypted drives
- Customers have option to turn on encryption, non-disruptively, at any time; even after data has been written to the system.
- FIPS 140-2 Validated Self-Encrypting Drives (SEDs) have been certified by the U.S. National Institute of Standards and Technology (NIST) and Canadian Communications Security Establishment (CSE) as meeting the Level 2 security requirements for cryptographic modules as defined in the Federal Information Processing Standards (FIPS) 140-2 Publication
- Strengthen the DAR solution with an optional FIPS 140-2 Level 2 validated external key manager. Supports KMIP 1.1 for key management communications.
- Supports HPE Enterprise Secure Key Manager 4.0 and SafeNet KeySecure k460 and k150 centralized key management.
- A data encryption license (LTU) is required to enable encryption on the array. One encryption license is required for each encrypted array.
- Once encryption is enabled on the HPE 3PAR StoreServ Storage, it cannot be disabled.
- The local key manager is included in the HPE 3PAR OS. There is not a separately orderable part number for the local key manager.

**NOTE:** P9M61B, P9M63B, and P9L81B require a maximum ambient temperature of 95° F / 35° C.

## Step 7 - Choose Service Processor

The HPE 3PAR Service Processor monitors the HPE 3PAR StoreServ 20000 and enables remote monitoring and remote servicing of the array. The key capabilities of the HPE 3PAR Service Processor is to:

- Enable rapid, proactive response to issues
- Provide a secure communication channel between the customer's data center and HPE 3PAR Central for:
  - Remote Online Software Upgrade; upgrade software with no application disruption
  - Remote Diagnostics; key diagnostic information maintained centrally on a historical basis
  - Remote Serviceability; provides fast predictive response and remediation

Each HPE 3PAR StoreServ 20000 requires its own physical Service Processor. The Service Processor functions as the communication interface between a customer's IP network and HPE 3PAR Central by managing all service-related communications.

## Configuration Information

The Service Processor leverages the industry-standard HTTP over Secure Sockets Layer (HTTPS) protocol to secure and encrypt data communication.

The physical Service Processor is a dedicated storage appliance located within the storage rack providing close proximity to the HPE 3PAR StoreServ 20000 Storage. The physical Service Processor is fully supported and maintained by HPE Services. The physical Service Processor has virtual serial port (through iLO) connectivity that provides maintenance access for trouble shooting capabilities.

HPE 3PAR StoreServ RPS Service Processor	K2R29A
HPE 3PAR StoreServ RPS Service Processor	QOF86A

- K2R29A is used with HPE 3PAR 20450 arrays
- QOF86A is used with HPE 3PAR 20800, 20840, 20850 arrays

### HPE 3PAR Policy Server

HPE 3PAR Policy Server works to implement customer-configurable remote service access policies. Installed on a customer-provided host, Policy Server provides the customer with ultimate flexibility and control to allow or deny outbound communication or remote service connections to and from an HPE 3PAR StoreServ Storage system. Policy Server also serves as the centralized point for collecting and storing audit logs of all diagnostic data transfers and authorized remote service connections to and from all configured HPE 3PAR Storage systems. HPE 3PAR Policy Server provides the following benefits:

- The customer has complete control over policy administration.
- A centralized policy administration for all HPE 3PAR Storage systems is provided.
- A centralized audit log to facilitate security audits is provided.

HPE 3PAR Policy Manager Software LTU	TE400B
--------------------------------------	--------

## Step 8 – Choose Cables

Cables are required for various connections on the HPE 3PAR StoreServ 20000 Storage. Copper SAS cables are required for connecting the drive enclosures to the nodes on the base rack of the array and for daisy chaining between adjacent drive enclosures. Active Optical SAS Cables are required for connecting drive enclosures in adjacent racks to the nodes in the base rack. OM4 Fiber Cables are required for other connectivity such as host connectivity, Remote Copy and Peer Motion.

<b>SAS Cables for Drive Connectivity</b>	HPE External 0.5m (1ft) Mini-SAS HD 4x to Mini-SAS HD 4x Cable	691968-B21
	HPE External 2.0m (6ft) Mini-SAS HD 4x to Mini-SAS HD 4x Cable	716197-B21
	HPE 10m Mini SAS High Density Active Optical Cable	E7V95A
	HPE 25m Mini SAS High Density Active Optical Cable	E7V96A
	HPE 100m Mini SAS High Density Active Optical Cable	E7V97A
<b>OM4 Cables for host connectivity and other data services</b>	HP Premier Flex LC/LC Multi-mode OM4 2 fiber 2m Cable	QK733A
	HP Premier Flex LC/LC Multi-mode OM4 2 fiber 5m Cable	QK734A
	HP Premier Flex LC/LC Multi-mode OM4 2 fiber 15m Cable	QK735A
	HP Premier Flex LC/LC Multi-mode OM4 2 fiber 30m Cable	QK736A
	HP Premier Flex LC/LC Multi-mode OM4 2 fiber 50m Cable	QK737A
<b>Optical splitters</b>	HP Multi Fiber Push On to 4 x Lucent Connector 5m Cable	K2Q46A
	HP Multi Fiber Push On to 4 x Lucent Connector 15m Cable	K2Q47A
<b>Direct Attach Copper Cables for host connectivity</b>	<b>HPE 3COM (H3C)</b>	
	HPE X240 10G SFP+ to SFP+ 1.2m Direct Attach Copper Cable	JD096C
	HPE X240 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	JD097C

## Configuration Information

HPE X240 10G SFP+ to SFP+ 5m Direct Attach Copper Cable	JG081C
HPE X240 QSFP+ 4x10G SFP+ 1m DAC Cable	JG329A
HPE X240 QSFP+ 4x10G SFP+ 3m DAC Cable	JG330A
HPE X240 QSFP+ 4x10G SFP+ 5m DAC Cable	JG331A
<b>HPE Procurve</b>	
HP X242 10G SFP+ to SFP+ 1m Direct Attach Copper Cable	J9281B
HP X242 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	J9283B
HPE X242 10G SFP+ to SFP+ 7m Direct Attach Copper Cable	J9285B
<b>Brocade</b>	
HPE 1m B-series Active Copper SFP+ Cable	AP818A
HPE 3m B-series Active Copper SFP+ Cable	AP819A
HPE 5m B-series Active Copper SFP+ Cable	AP820A
<b>Cisco</b>	
HPE C-series 3M Passive Copper SFP+ Cable	K2Q21A
HPE C-series 5M Passive Copper SFP+ Cable	K2Q22A
HPE 7m C-series Active Copper SFP+ Cable	QK701A
HPE 10m C-series Active Copper SFP+ Cable	QK702A
<b>HPE BladeSystem</b>	
HP BLc 10G SFP+ SFP+ 3m DAC Cable	487655-B21
HP BLc 10G SFP+ SFP+ 5m DAC Cable	537963-B21
HP BLc 10G SFP+ SFP+ 7m DAC Cable	487658-B21

- DAC cable support for 3PAR 20000 platforms require HPE 3PAR OS version 3.2.2 MU3 or higher.
- J9285B, AP818A, AP819A, AP820A, QK701A, QK702A, 487655-B21, 537963-B21, 487658-B21 require HPE 3PAR OS version 3.3.1 or higher.
- DAC cables are supported for 10GbE speeds with iSCSI, FCoE and File protocols
- Direct Connect between the host and storage is not supported with DAC cables, they require the use of a switch.
- DAC cables can be used on built-in RCIP port for Replication

For the latest information refer to Single Point of Connectivity Knowledge for HPE Storage Products (SPOCK)

## Step 9 – Choose Rack Options

The HPE 3PAR StoreServ 20000 Storage is available factory integrated on the HPE Intelligent Series racks with the appropriate power distribution units (PDUs). Multiple racks are required based on the number of drive enclosures used in the array configuration. Alternatively, a third party rackmount kit can be purchased in cases where the HPE 3PAR StoreServ 20000 Storage needs to be installed on any rack other the Hewlett Packard Enterprise racks mentioned below.

HPE 42U 600mm x 1075mm Enterprise Shock Rack	BW904A
HPE 600mm Rack Stabilizer Kit	BW932A
HPE 42U 1075mm Side Panel Kit	BW906A
HPE 42U 600mm x 1200mm Enterprise Shock Rack	BW908A
HPE 42U 600mm x 1075mm Enterprise G2 Shock Rack	P9K38A
HPE G2 Rack 42U 1075mm Side Panel Kit	P9L15A
HPE 42U 600mm x 1200mm Enterprise G2 Shock Rack	P9K40A

## Configuration Information

HPE G2 Rack 42U 1200mm Side Panel Kit	P9L16A
HPE 3PAR StoreServ Third Party Rackmount Kit	C8S86A

- When HPE 3PAR 20800, 20840, 20850 arrays are installed on a 42U 1075mm rack (BW904A, P9K38A) horizontal modular PDUs are used and a single rack can support up to 8 drive enclosures.
- When HPE 3PAR 20800, 20840, 20850 arrays are installed on a 42U 1200mm rack (BW908A, P9K340A) vertical PDUs are used and a single rack can support up to 12 drive enclosures.
- Expansion racks can support up to 20 drive enclosures.

**NOTE:** The Third Party Rack Mount Kit is required for mounting the 3PAR StoreServ 20000 Node enclosure on third party racks. For mounting the drive enclosure, rail kits are included with the product.

For more information on the HPE rack offerings, please see the following URL:  
<http://h18004.www1.hpe.com/products/servers/platforms/rackandpower.html>

For more information on rack options,  
 see: <http://www.hpe.com/products/rackoptions>.

<b>PDUs</b>	HPE G2 Basic Mdlr 4.9kVA/C19 NA/JP PDU	P9Q39A
	HPE G2 Basic 4.9kVA/(20) C13 NA/JP PDU	P9Q41A
	HPE G2 Basic Modular 7.3kVA/C19 INTL PDU	P9Q43A
	HPE G2 Basic 7.3kVA/(20) C13 INTL PDU	P9Q45A
	HPE G2 Basic Mdlr 3Ph 8.6kVA/NA/JP PDU	P9Q52A
	HPE G2 Basic 3Ph 8.6kVA/C13 NA/JP PDU	P9Q54A
	HPE G2 Basic Mdlr 3Ph 11kVA/C19 INTL PDU	P9Q57A
	HPE G2 Basic 3Ph 11kVA/C13 C19 INTL PDU	P9Q58A
	HPE G2 Basic 3Ph 22kVA/(18) C13 INTL PDU	P9Q64A
	HPE G2 PDU Ext Bar Kit with C13 Outlets	P9Q66A

## Step 10 - Choose Software

Hewlett Packard Enterprise provides an extensive selection of features for HPE 3PAR StoreServ Storage. The 3PAR StoreServ 20000 includes as part of the array and drives the All-Inclusive Single-System Software which includes: OS Suite, Virtual Copy, Adaptive Optimization, Dynamic Optimization, Priority Optimization, Virtual Domains, Virtual Lock, Online Import, File Persona, Recovery Manager Central (RMC), and Smart SAN. Additional software can be purchased by ordering the All-inclusive Multi-system Software, a frame license that includes Peer Motion, Remote Copy, Peer Persistence, and Cluster Extension. The Data-at-Rest Encryption Software completes the portfolio of software available with HPE 3PAR StoreServ Storage.

For more information regarding HPE 3PAR 20000 software SKUs  
 see: <http://h20195.www2.hpe.com/v2/GetPDF.aspx/c04199812.pdf>

### All-inclusive Single-system Software

The All-Inclusive Single-System Software is included as part of the array and offers all the software titles necessary to run a single HPE 3PAR Storage array.

## Configuration Information

<b>HPE 3PAR Operating System Software</b>	The HPE 3PAR Operating System Software gives you everything you need to get up and running quickly and efficiently. It is the foundation software of HPE 3PAR StoreServ Storage, combining advanced virtualization capabilities with simple storage management, high efficiency, and world class performance.
<b>HPE 3PAR Virtual Copy</b>	HPE 3PAR Virtual Copy software protects and shares data affordably with rapid recovery using reservation-less, non-duplicative, copy-on-write snapshots.
<b>HPE 3PAR Adaptive Optimization</b>	HPE 3PAR Adaptive Optimization improves storage utilization by enabling cost-optimized storage tiering.
<b>HPE 3PAR Dynamic Optimization</b>	HPE 3PAR Dynamic Optimization delivers the required service levels for the lowest possible cost throughout the data lifecycle.
<b>HPE 3PAR Priority Optimization</b>	HPE 3PAR Priority Optimization assures service levels with QoS controls for mission critical applications.
<b>HPE 3PAR Virtual Domains and Virtual Lock</b>	With HPE 3PAR Virtual Domains and HPE 3PAR Virtual Lock software, you can segregate access and deliver robust storage services for different applications and user groups with additional security attached to the retention of storage volumes.
<b>HPE 3PAR Online Import</b>	HPE 3PAR Online Import Software is the first do-it-yourself data migration tool for enterprise Storage Area Networks. Unlike traditional block migration approaches, Online Import Software enables customers to migrate storage volumes from HPE EVA Storage, EMC, Hitachi, IBM Storage to HPE 3PAR StoreServ Storage systems online and without complex planning or dependency on extra tools.
<b>HPE 3PAR File Persona Software</b>	This software enables rich set of file protocol services, core file data services and an Object Access API to extend the spectrum of primary storage workloads natively addressed by HPE 3PAR StoreServ 20000 Storage. With this solution, the architectural benefits of HPE 3PAR StoreServ 20000 Storage can be extended to use cases such as: home directories and user shares; content management and collaboration; data preservation and governance; and custom cloud applications.
<b>HPE Recovery Manager Central (RMC) for VMware vSphere, MS SQL, Oracle and more</b>	Protect your business critical applications without impacting performance using HPE RMC software. With this automated, non-intrusive software, the simplicity and performance of local and remote snapshots can be combined with the reliability and cost effective retention of deduplicated backups to protect any application data stored on 3PAR arrays. Based on your RTO objectives, retain the space-efficient snapshots on the 3PAR array itself or offload them to a StoreOnce Backup system using fast, efficient, Express Protect Backups. Based on your RPO objectives, generate as many application-consistent recovery points as desired for VMware VMs, MS SQL and Oracle databases or automate the protection workflow for any application data on 3PAR using the RMC REST API SDK.
<b>HPE 3PAR Recovery Manager for Hyper-V (RM-H)</b>	Protect your Microsoft Hyper-V environment with HPE 3PAR Recovery Manager for Microsoft Hyper-V and the HPE 3PAR VSS Provider software, included in this software bundle. By leveraging HPE 3PAR Virtual Copy software, RM-H enables administrators to non-disruptively create space-efficient, application-consistent, point-in-time snapshots to protect and recover Hyper-V Virtual Hard Disks (VHDs) and individual VMs.
<b>HPE 3PAR Recovery Manager for Exchange (RM-E)</b>	Protect your Microsoft Exchange environment with HPE 3PAR Recovery Manager for Microsoft Exchange and the HPE 3PAR VSS Provider software, included in this software bundle. By leveraging HPE 3PAR Virtual Copy software, RM-E enables administrators to non-disruptively create space-



## Configuration Information

efficient, application-consistent, point in time snapshots to protect and recover Exchange databases and mailboxes.

### **HPE 3PAR Recovery Manager for Oracle (RM-O)**

Protect your Oracle environment running on Solaris, HP-UX or IBM AIX platforms with HPE 3PAR Recovery Manager for Oracle. By leveraging HPE 3PAR Virtual Copy software, RM-O enables Oracle administrators to non-disruptively create space-efficient, application-consistent, point-in-time snapshots to protect and recover Oracle databases and instances. For Oracle environments running on RHEL or Oracle Linux, please refer to RMC for Oracle above.

### **HPE Smart SAN**

HPE Smart SAN for HPE 3PAR makes end-to-end SAN configuration and management simple and autonomic, reducing the probability of errors through SAN automation. It is an application embedded in the SAN components (array, hosts and switches) that enables the 3PAR to automate configuration for settings and policies across the SAN. Smart SAN features enable customers to automate peer zoning, resulting in the creation of fewer zones, and enables configuration of zones in minutes, not hours.

### **HPE StoreFront Remote SaaS Portal**

The HPE StoreFront Remote SaaS Portal provides proactive tools and integrated data collection from the HPE 3PAR StoreServ Storage arrays that call home to deliver unique insights and analytics all in one dashboard. Identify capacity and performance issues early through intuitive capacity and performance trend analysis and forecasting. These valuable analytics help maximize asset utilization and optimize the datacenter with recommendations and remedial actions when issues arise. Users can log into <http://www.storefrontremote.com> to claim their arrays and get access for free.

## All-inclusive Multi-system software

The All-inclusive Multi-system software is an optional software suite that includes Peer Motion, Remote Copy, Peer Persistence, and Cluster Extension.

### **HPE 3PAR Peer Motion**

HPE 3PAR Peer Motion enables load balancing at will wherein, movement of data and workloads between arrays is initiated without impacting applications, users or services.

### **HPE 3PAR Remote Copy**

HPE 3PAR Remote Copy offers simple and cost effective data protection for efficient multi-tenant disaster recovery.

### **HPE 3PAR Peer Persistence**

HPE 3PAR Peer Persistence software enables HPE 3PAR StoreServ systems located at metropolitan distances to act as peers to each other, presenting a nearly continuous storage system to hosts connected to them.

### **HPE 3PAR Cluster Extension**

HPE 3PAR Cluster Extension Software offers rapid automated protection against application downtime from fault, failure, or site disaster. CLX integrates with the Windows OS clustering software and HPE 3PAR Remote Copy to automate failover and failback between sites

## Step 11 – Choose File Controller

With HPE 3PAR StoreServ File Controller you get an efficient, bulletproof, and effortless way to provide file storage from HPE 3PAR StoreServ Storage. 3PAR StoreServ File Controller saves you time and money by supporting hundreds to thousands of concurrent users and diverse file workloads. It also has non-intrusive data deduplication that provides an average 50-60% in space savings. It provides security through features such as built-in encryption, sophisticated access controls, online snapshots, and the ability to run endpoint protection and backup software onboard so that data is protected at rest and in flight. HPE 3PAR StoreServ File Controllers are clustered file gateway configurations with transparent failover and online rolling maintenance updates that deliver

## Configuration Information

continuous availability of data to users, servers, and applications. With a straightforward and consistent management experience, it also provides robust capabilities for demanding 24 x 7 file storage environments. For more details on the specifications and data services offered by the HPE 3PAR StoreServ File Controller please refer to the following link:

**<http://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04637524>**

## Technical Specifications

### Physical Specifications

#### 2-Meter Cabinet

Dimensions (width x height x depth)	23.54 x 79 x 44.3 in	59.8 x 200.6 x 112.5 cm
Clearance for installation of cabinet	50 in	127 cm
Service clearance (front and rear)	Front/Rear: 40 in / 36 in	Front/Rear: 101.4 / 91.4 cm
Weight (not populated)	418 lb	190 kg
Maximum Weight of 8-node Base Rack <sup>1</sup> (fully populated)	1256.1 lb	571.0 kg
Maximum Weight of 4-node Base Rack <sup>1</sup> (fully populated)	1327 lb	602.0 kg
Maximum Weight of Expansion Rack <sup>2</sup> (fully populated)	1436.8 lb	653.1 kg
Maximum Weight per Leveling Foot	750 lb	340.2 kg

#### Component Weights

20000 8-way Node Chassis	173 lb	78.6 kg
20000 4-way Node Chassis	93 lb	42.3 kg
20000 Controller Node	48.15 lb	21.8 kg
20000 Drive Enclosure	38 lb	17.3 kg
Service Processor	37.48 lb	17 kg
HPE Rack	245 lb	111.4 kg

#### Supported Host FC Connections

FC Connector Type from Storage System to Host Port	LC to LC
FC Cable Core Diameter	OM4
Connector Boot Length	Standard

<sup>1</sup>Includes a 20800 base rack with 8 nodes, 6 drive enclosures, 1 Service Processor and PDUs in a 1075mm HPE i-Series Rack

<sup>2</sup>Includes a 20000 expansion rack with 20 drive enclosures and PDUs in a 1075mm HPE i-Series Rack

<sup>3</sup> Under maximum load

### Power and Heat

#### Single Phase Power Supply Requirements (per rack or cabinet)

##### NEMA (North America, Taiwan, Philippines & Japan)

Input Voltage (VAC)	220 (200 - 240)
Frequency (Hz)	50 - 60
Circuit Breaker Maximum	30 A per PDU (de-rated to 24 A)
Power Plugs	(4) L6-30P with 1+1 redundant (Base and Exp racks)
Power Connectors	(4) L6-30C with 1+1 redundant (Base and Exp racks)
Power Receptacles	(4) L6-30R with 1+1 redundant (Base and Exp racks)

##### IEC (International)

Input Voltage (VAC)	220 (200 - 240)
Frequency (Hz)	50 - 60
Circuit Breaker Maximum	32 A per PDU
Power Plugs	(4) IEC 60309-332P6 (32A) with 1+1 redundant (Base and Exp racks)

## Technical Specifications

Power Connectors	(4) IEC 60309-332C6 (32A) with 1+1 redundant (Base and Exp racks)
Power Receptacles	(4) IEC 60309-332R6 (32A) with 1+1 redundant (Base and Exp racks)

### Three Phase Power Supply Requirements (per rack or cabinet)

#### NEMA (North America, Taiwan, Philippines & Japan)

Input Voltage (VAC)	200 - 240 p-p
Frequency (Hz)	50 - 60
Circuit Breaker Maximum	48 A per PDU (de-rated to 27.71 A per phase)
Power Plugs	(4) L15-30P with 1+1 redundant (Base and Exp racks)
Power Connectors	(4) L15-30C with 1+1 redundant (Base and Exp racks)
Power Receptacles	(4) L15-30R with 1+1 redundant (Base and Exp racks)

#### IEC (International)

Input Voltage (VAC)	200 - 240 p-n; 380 - 415p-p
Frequency (Hz)	50 - 60
Circuit Breaker Maximum	16A per phase per PDU (Base and Exp racks)
Power Plugs	(2) IEC 60309-516P6W (16A) with 1+1 redundant (Base and Exp racks)
Power Connectors	(2) IEC 60309-516C6W (16A) with 1+1 redundant (Base and Exp racks)
Power Receptacles	(2) IEC 60309-516R6W (16A) with 1+1 redundant (Base and Exp racks)

Refer to the **HPE Power Advisor** online tool for power consumption, heat loading, and circuit sizing information available at <https://paonline56.itcs.hpe.com>

### Environmental Specifications

Operating Temperature	41° to 104° F (5° to 40° C) – Reduce rating by 1° F for each 1000 ft (1.8° C/1,000 m)
Shipping Temperature (Controller Node)	-22° to 140° F (-30° to 60° C). Maximum rate of change is 20° C/hr (36° F/hr)
Shipping Temperature (Drive Enclosure)	32° to 140° F (0° to 60° C). Maximum rate of change is 20° C/hr (36° F/hr)
Operating Altitude (ft/m) max.	10,000 ft / 3,048 m
Shipping Altitude (ft/m) max.	40,000 ft / 12,192 m
Humidity	10% to 90% non-condensing
Shipping Humidity	10% to 90% non-condensing
Operating Vibration	0.25G, Sine, 5-500 Hz; 0.25 GRMS, Random 5-500 Hz
Non-operating Vibration	0.5G, 5 - 500 Hz, Sine; 0.5 GRMS, Random, 5-500Hz
Operating Shock (Controller Node)	5G, 11ms, half-sine
Operating Shock (Drive Enclosure)	5G, 11ms, half-sine
Non-operating Shock	10G, 11ms, half-sine
Raised Floor	Recommended
Maximum Exhaust Air Flow	Per Controller Node – 157 CFM Per Drive Enclosure – 81 CFM

Acoustics  
Sound pressure level measured per ISO 7779 specifications during normal operating fan conditions

Fan Speed (RPM)	8-way Node	Fan Speed (RPM)	Drive Enclosure
5600	78.9	5580	43
8500	89.5	16500	64

## Technical Specifications

Electromagnetic Compatibility	CISPR 22:2008/ EN55022:2010 Class A CISPR 32 Edition 2.0/EN55032:2010 Class A CISPR 24:2010/ EN 55024:2010 IEC 61000-3-2: 2014/ EN 61000-3-2: 2014 IEC 61000-3-3:2013/ EN 61000-3-3: 2013 AS/NZS CISPR22: 2009 +A1:2010 Class A AS/NZS CISPR 32:2013 CNS 13438:2006 Class A 47 CFR Part 15 Subpart b Class A ICES-003 Issue 6 Class A V-3/2015.04 RRA Public Notification 2015-27, Dec 3, 2015			
Safety	IEC 60950-1:2005 (2nd Edition); +A1:2009 +A2:2013 EN 60950-1:2006 +A11:2009 +A1:2010 +A12:2011 +A2:2013 IEC 62368-1:2014 2nd Edition EN 62368-1:2014 2nd Edition EN 62479:2010 CNS 14336-1 2nd Edition UL 60950-1-07 2nd Ed. +A1:2011 +A2:2014 UL 62368-1 CAN/CSA C22.2 No. 60950-1-07 +A1:2011 +A2:2014			
Certifications / Markings	cTUVus Mark TUV GS-mark EnergyStar	CE Mark FCC Class A IC Class A VCCI Class A BSMI Class A	BSMI RoHS BIS KCC EAC RCM	Ukraine WEEE China RoHS Morocco Nordic text

**NOTE:** Specifications are subject to change without notice.

**NOTE:** The following drives (P9M61B, P9M63B, and P9L81B) require a maximum ambient temperature of 95° F / 35° C.

## Technical Specifications

### Appendix A – Legacy HPE 3PAR StoreServ 20000 models

This Appendix includes the technical specifications and controller node SKUs for the legacy HPE 3PAR StoreServ 20000 models that have been refreshed with corresponding models in June 2017.

Summary	20800	20850	20840
Number of Controller Nodes	2, 4, 6, or 8		
HPE 3PAR Gen5 ASICs	4, 8, 12 or 16		
Management Processors	4 - 16 Six-Core 2.5 GHz	4 - 16 Eight-Core 2.5 GHz	
Total Cache	0.4 – 33.8 TiB	0.9 – 3.6 TiB	0.9 – 51.3 TiB
Flash Cache (optional)	0 - 32 TiB	Not Applicable	0 – 48 TiB
Max On-Node Cache	448 – 1792 GiB	896 - 3584 GiB	896 – 3584 GiB
Maximum Host Ports	160 ports		
16Gb/s Fibre Channel Host Ports <sup>1</sup>	0 – 160 ports		
10Gb/s iSCSI Host Ports <sup>2</sup>	0 – 80 ports		
10Gb/s FCoE Host Ports <sup>2</sup>	0 – 80 ports		
10GbE Network Ports <sup>3</sup> for File Persona	0 – 48 ports		
Built-in 10GbE Ports <sup>4</sup>	2 - 8 ports		
Number of Hard Disk Drives	6 - 2304 drives	Not Applicable	6 – 2304 drives
Number of Solid State Drives	6 – 1152	6 - 1152	6 - 1152
Raw Capacity	1.92 <sup>5</sup> - 9600 TiB <sup>6</sup>	1.92 <sup>5</sup> - 8043 TiB <sup>6</sup>	1.92 <sup>5</sup> - 9600 TiB <sup>6</sup>
Raw Capacity (SSD Only)	1.92 <sup>5</sup> - 8043 TiB <sup>6</sup>	1.92 <sup>5</sup> - 8043 TiB <sup>6</sup>	1.92 <sup>5</sup> - 8043 TiB <sup>6</sup>
Maximum usable file capacity <sup>7</sup>	2 – 1024 TiB <sup>6</sup>		

**NOTE:** Specifications are subject to change without notice

1 Each port is full bandwidth 16 Gbit/s Fibre Channel capable as applicable

2 Each port is full bandwidth 10 Gbit/s iSCSI or FCoE capable

3 Each port is full bandwidth 10 Gbit/s Ethernet designated for hosting File services and Object access protocols

4 Two built-in 10-GbE ports per node pair can be used for Remote Copy (RCIP); maximum of 8 usable; RCFC works out of the FC Host ports

5 Minimum raw capacity currently supported based on minimum of 4 SSDs per array

6 For storage capacity, 1 GiB = 2<sup>30</sup> bytes and 1 TiB = 1,024 GiB

7 Usable file capacity supported for HPE 3PAR File Persona

### HPE 3PAR StoreServ 20000 Base Configurations

The Base includes the controller node chassis that determines how many controller nodes the storage array can scale to.

HPE 3PAR StoreServ 20000 8-way Storage Configuration Base

C8S83B

- A minimum of one (1) configuration base must be ordered for each array

### HPE 3PAR StoreServ 20000 Controller Node Options

## Technical Specifications

HPE 3PAR StoreServ 20000 Storage Controller Nodes determine the type of storage array that is required to be built. Each Controller Node consists of CPUs, ASICs, Cache banks and connectivity options for the storage array.

HPE 3PAR 20800 2x6 Core 2.5GHz 96GB/128GB Cache Node with All-inclusive Single-system Software	C8S84B
HPE 3PAR 20850 2x8 Core 2.5GHz 192GB/256GB Cache Node with All-inclusive Single-system Software	C8S87B
HPE 3PAR 20840 2x8 Core 2.5GHz 192GB/256GB Cache Node with All-inclusive Single-system Software	N9Y49B

## HPE 3PAR StoreServ 20000 Upgrade Controller Node Options

Use the HPE 3PAR StoreServ 20000 Upgrade Controller Nodes to increase the number of controller nodes on an existing previously installed HPE 3PAR StoreServ 20000 array. Increasing the controller nodes on an existing array helps improve resiliency, performance and increase scalability in a balanced fashion.

HPE 3PAR 20800 2x6 Core 2.5GHz 96GB/128GB Cache Upgrade Node with All-inclusive Single-system SW	C8S85B
HPE 3PAR 20850 2x8 Core 2.5GHz 192GB/256GB Cache Upgrade Node with All-inclusive Single-system SW	C8S88B
HPE 3PAR 20840 2x8 Core 2.5GHz 192GB/256GB Cache Upgrade Node with All-inclusive Single-system SW	N9Y50B

- Each Controller Node SKU represents a single (1) unit
- Each Controller Node SKU is loaded with All-inclusive Single-system Software
- Controller Nodes are always ordered in pairs on a HPE 3PAR StoreServ 20000 Storage array
- One (1), two (2), three (3) pairs of 20800, 20840 or 20850 Upgrade Controller Nodes can be ordered per array
- An array with C8S84B nodes (20800) or N9Y49B nodes (20840) can be configured as a converged flash array with SSDs and HDDs
- An array with C8S87B nodes (20850) can be configured as an all flash array with SSDs only
- The node configurations and base configuration, shown in the section above, have built-in Gigabit Ethernet ports for management and Remote Copy over IP

**NOTE:** Different controller nodes cannot be mixed within a HPE 3PAR StoreServ 20000 Storage array. Care must be taken to ensure that the appropriate upgrade node is purchased while performing a node field upgrade for an existing 20000 array.

## Technical Specifications

This Appendix includes the list of SKUs associated with the simplified spindle software licensing. This list includes Base Configuration and drive SKUs, all other SKUs are in common between the Simplified spindle software licensing and the all-inclusive software licensing.

### HPE 3PAR StoreServ 20000 Base Configurations

HPE 3PAR StoreServ 20000 4-way Storage Configuration Base	C8S89A
HPE 3PAR StoreServ 20000 8-way Storage Configuration Base	C8S83A
<ul style="list-style-type: none"> <li>A minimum of one (1) configuration base must be ordered for each array</li> </ul>	

### HPE 3PAR StoreServ 20000 Controller Node Options

HPE 3PAR StoreServ 20800 2x6 Core 2.5GHz 96GB Control 128GB Data Cache Controller Node	C8S84A
HPE 3PAR StoreServ 20450 2x8 Core 2.5GHz 192GB Control 256GB Data Cache Controller Node	C8S90A
HPE 3PAR StoreServ 20850 2x8 Core 2.5GHz 192GB Control 256GB Data Cache Controller Node	C8S87A
HPE 3PAR StoreServ 20840 2x8 Core 2.5GHz 192GB Control 256GB Data Cache Controller Node	N9Y49A

### HPE 3PAR StoreServ 20000 Upgrade Controller Node Options

HPE 3PAR StoreServ 20800 2x6Core 2.5GHz 96GB Control Cache 128GB Data Cache Upgrade Controller Node	C8S85A
HPE 3PAR StoreServ 20450 2x8 Core 2.5GHz 192GB Control 256GB Data Cache Upgrade Controller Node	C8S91A
HPE 3PAR StoreServ 20850 2x8 Core 2.5GHz 192GB Control 256GB Data Cache Upgrade Controller Node	C8S88A
HPE 3PAR StoreServ 20840 2x8 Core 2.5GHz 192GB Control 256GB Data Cache Upgrade Controller Node	N9Y50A

### HPE 3PAR StoreServ 20000 Drives

<b>HPE 3PAR SSDs</b> HPE 3PAR StoreServ 20000 400GB SAS SFF (2.5in) Solid State Drive	N9Y02A
HPE 3PAR StoreServ 20000 480GB SAS SFF (2.5in) Solid State Drive	K2Q50A
HPE 3PAR StoreServ 20000 480GB SAS Non-adaptive Flash Cache Capable LFF (3.5in) Solid State Drive	K2Q54A
HPE 3PAR StoreServ 20000 480GB SAS Non-adaptive Flash Cache Capable SFF (2.5in) Solid State Drive	J8S12A
HPE 3PAR StoreServ 20000 1.92TB SAS SFF (2.5in) Solid State Drive	J8S13A
HPE 3PAR StoreServ 20000 3.84TB SAS SFF (2.5in) Solid State Drive	K2R25A
HPE 3PAR StoreServ 20000 7.68TB SAS SFF (2.5in) Solid State Drive	P9L79A
HPE 3PAR StoreServ 20000 400GB SAS SFF (2.5in) Upgrade Solid State Drive	N9Y03A
HPE 3PAR StoreServ 20000 480GB SAS SFF (2.5in) Upgrade Solid State Drive	K2Q51A
HPE 3PAR StoreServ 20000 480GB SAS Non-adaptive Flash Cache LFF (3.5in) Upgrade Solid State Drive	K2Q55A
HPE 3PAR StoreServ 20000 480GB SAS Non-adaptive Flash Cache SFF (2.5in) Upgrade Solid State Drive	J8S28A
HPE 3PAR StoreServ 20000 1.92TB SAS SFF (2.5in) Upgrade Solid State Drive	J8S29A
HPE 3PAR StoreServ 20000 3.84TB SAS SFF (2.5in) Upgrade Solid State Drive	K2R24A
HPE 3PAR StoreServ 20000 7.68TB SAS SFF (2.5in) Upgrade Solid State Drive	P9L80A
HPE 3PAR StoreServ 20000 300GB SAS 15K SFF(2.5in) Hard Drive	J8S05A



## Technical Specifications

<b>HPE 3PAR SAS HDDs</b>	HPE 3PAR StoreServ 20000 600GB SAS 15K SFF(2.5in) Hard Drive	J8S06A
	HPE 3PAR StoreServ 20000 600GB SAS 10K SFF(2.5in) Hard Drive	J8S07A
	HPE 3PAR StoreServ 20000 1.2TB SAS 10K SFF(2.5in) Hard Drive	J8S08A
	HPE 3PAR StoreServ 20000 1.8TB SAS 10K SFF(2.5in) Hard Drive	J8S09A
	HPE 3PAR StoreServ 20000 300GB SAS 15K SFF(2.5in) Upgrade Hard Drive	J8S19A
	HPE 3PAR StoreServ 20000 600GB SAS 15K SFF(2.5in) Upgrade Hard Drive	J8S20A
	HPE 3PAR StoreServ 20000 600GB SAS 10K SFF(2.5in) Upgrade Hard Drive	J8S21A
	HPE 3PAR StoreServ 20000 1.2TB SAS 10K SFF(2.5in) Upgrade Hard Drive	J8S22A
	HPE 3PAR StoreServ 20000 1.8TB SAS 10K SFF(2.5in) Upgrade Hard Drive	J8S23A
<b>HPE 3PAR NL SAS HDDs</b>	HPE 3PAR StoreServ 20000 2TB SAS 7.2K SFF(2.5in) Hard Drive	M0S93A
	HPE 3PAR StoreServ 20000 2TB SAS 7.2K LFF(3.5in) Hard Drive	J8S10A
	HPE 3PAR StoreServ 20000 4TB SAS 7.2K LFF(3.5in) Hard Drive	K2Q38A
	HPE 3PAR StoreServ 20000 6TB SAS 7.2K LFF(3.5in) Hard Drive	J8S11A
	HPE 3PAR StoreServ 20000 8TB SAS 7.2K LFF(3.5in) Hard Drive	P9B39A
	HPE 3PAR StoreServ 20000 2TB SAS 7.2K SFF(2.5in) Upgrade Hard Drive	M0S94A
	HPE 3PAR StoreServ 20000 2TB SAS 7.2K LFF(3.5in) Upgrade Hard Drive	J8S24A
	HPE 3PAR StoreServ 20000 4TB SAS 7.2K LFF(3.5in) Upgrade Hard Drive	K2Q39A
	HPE 3PAR StoreServ 20000 6TB SAS 7.2K LFF(3.5in) Upgrade Hard Drive	J8S27A
HPE 3PAR StoreServ 20000 8TB SAS 7.2K LFF(3.5in) Upgrade Hard Drive	P9B40A	
<b>HPE 3PAR FIPS 140-2 Encryption Drives</b>	HPE 3PAR StoreServ 20000 920GB SAS SFF (2.5in) FIPS Encrypted Solid State Drive	J8S14A
	HPE 3PAR StoreServ 20000 1.92TB SAS SFF (2.5in) FIPS Encrypted Solid State Drive	J8S15A
	HPE 3PAR StoreServ 20000 3.84TB SAS SFF (2.5in) FIPS Encrypted Solid State Drive	M0T65A
	HPE 3PAR StoreServ 20000 7.68TB SAS SFF (2.5in) FIPS Encrypted Solid State Drive	P9L81A
	HPE 3PAR StoreServ 20000 15.36TB SAS SFF (2.5in) FIPS Encrypted Solid State Drive	P9M63A
	HPE 3PAR StoreServ 20000 600GB SAS 15K SFF(2.5in) FIPS Encrypted Hard Drive	J8S16A
	HPE 3PAR StoreServ 20000 1.2TB SAS 10K SFF(2.5in) FIPS Encrypted Hard Drive	J8S17A
	HPE 3PAR StoreServ 20000 2TB SAS 7.2K LFF(3.5in) FIPS Encrypted Hard Drive	N9X98A
	HPE 3PAR StoreServ 20000 4TB SAS 7.2K LFF(3.5in) FIPS Encrypted Hard Drive	N9Y00A
	HPE 3PAR StoreServ 20000 6TB SAS 7.2K LFF(3.5in) FIPS Encrypted Hard Drive	J8S18A
	HPE 3PAR StoreServ 20000 8TB SAS 7.2K LFF(3.5in) FIPS Encrypted Hard Drive	P9B41A
	HPE 3PAR StoreServ 20000 920GB SAS SFF (2.5in) FIPS Encrypted Upgrade Solid State Drive	J8S30A
	HPE 3PAR StoreServ 20000 1.92TB SAS SFF (2.5in) FIPS Encrypted Upgrade Solid State Drive	J8S31A
	HPE 3PAR StoreServ 20000 3.84TB SAS SFF (2.5in) FIPS Encrypted Upgrade Solid State Drive	M0T63A
	HPE 3PAR StoreServ 20000 600GB SAS 15K SFF(2.5in) FIPS Encrypted Upgrade Hard Drive	J8S32A
	HPE 3PAR StoreServ 20000 1.2TB SAS 10K SFF(2.5in) FIPS Encrypted Upgrade Hard Drive	J8S33A
	HPE 3PAR StoreServ 20000 2TB SAS 7.2K LFF(3.5in) FIPS Encrypted Upgrade Hard Drive	N9X99A
	HPE 3PAR StoreServ 20000 4TB SAS 7.2K LFF(3.5in) FIPS Encrypted Upgrade Hard Drive	N9Y01A
	HPE 3PAR StoreServ 20000 6TB SAS 7.2K LFF(3.5in) FIPS Encrypted Upgrade Hard Drive	J8S34A
	HPE 3PAR StoreServ 20000 8TB SAS 7.2K LFF(3.5in) FIPS Encrypted Upgrade Hard Drive	P9B42A

## Summary of Changes

Date	Version History	Action	Description of Change
25-Sept-2017	From Version 19 to 20	Changed	Updated 256 TiB per node pair capacity for File Persona Added G2 Enterprise Racks
11-Jul-2017	From Version 18 to 19	Changed	Updated Environmental Specifications
12-Jun-2017	From Version 17 to 18	Changed	Fixed typos
05-Jun-2017	From Version 16 to 17	Changed	Changes made throughout the QuickSpecs
27-Mar-2017	From Version 15 to 16	Changed	Updated the Environmental Specifications section
17-Feb-2017	From Version 14 to 15	Changed	Changes made throughout the QuickSpecs
13-Feb-2017	From Version 13 to 14	Changed	New Base, Node and Drives SKUs with all-inclusive licensing. New Support services and warranty updates. Note on third party rackmount kits. Updates to raw capacity limit Removed File Persona usage for RCIP port
28-Nov-2016	From Version 12 to 13	Changed	Added new drives (7.68TB FE SSD and 15.36TB FE SSD) Updated SSD descriptions
15-Aug-2016	From Version 11 to 12	Changed	Changes made to the Overview and Configuration Sections
07-Jun-2016	From Version 10 to 11	Changed	Added Smart SAN
15-Apr-2016	From Version 9 to 10	Changed	Updated SSD descriptions
31-Mar-2016	From Version 8 to 9	Changed	Changes made to the entire document
16-Feb-2016	From Version 7 to 8	Changed	Updated the max usable file capacity to 512TiB and updated the use cases for File Persona
04-Dec-2015	From Version 6 to 7	Changed	Changes made to the Overview and Technical Specifications Sections
01-Dec-2015	From Version 5 to 6	Changed	Changes made to the entire document
02-Oct-2015	From Version 4 to 5	Added	Added The HPE StoreFront Remote SaaS Portal
28-Sept-2015	From Version 3 to 4	Changed	Changes made to the entire document
24-Aug-2015	From Version 2 to 3	Changed	Added information on Hewlett Packard Enterprise 3PAR StoreServ 20450 Storage. Changes made to built-in 10GbE port support for File Persona and added sync and share use case.
05-Jun-2015	From Version 1 to 2	Changed	Changes made to the Service & Support and Detailed Specifications Sections



**Sign up for updates**

© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.



Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation. Unix is a registered trademark of The Open Group.

c04607917 - 15246 - Worldwide - V20- 25-September-2017