

Overview

HPE Apollo 6500

The HPE Apollo 6500 System provides the tools and the confidence to deliver high performance computing (HPC) innovation. The system consists of three key elements: The HPE ProLiant XL270 Gen9 Accelerator tray, the HPE Apollo 6500 Chassis, and the HPE Apollo 6000 Power Shelf.

The HPE Apollo 6500 chassis can accommodate two 2U, full-width HPE ProLiant XL270d Accelerator Trays, each individually front serviceable. With full HPE Advanced Power Manager support to automatically discover hardware components and enable bay level power on and off, server metering, aggregate dynamic power capping, configurable power-up dependencies and sequencing, consolidated Ethernet access to all resident iLOs, and asset management capabilities.


The HPE ProLiant XL270d Gen9 Accelerator Tray provides up to 37.6 Tflops of double precision performance and up to 74.4 Tflops of single precision performance with the NVIDIA® Tesla P100 GPUs and two Intel® Xeon® E5-2600 v4 processors in a 2U server. With a configurable internal PCIe Gen3 fabric, choose to optimize the GPU topology to match your specific needs. High-bandwidth, low-latency networking is tightly coupled to the accelerators allowing you to take full advantage of your network. Two x16 PCIe Gen3 slots for your choice of high speed fabrics.

The HPE Apollo 6000 Power Shelf offers pooled power for rack level efficiency as well as provides N+N redundancy to support your datacenter needs. Depending on the power configurations of the trays within a chassis, the power shelf can support 2 to 4 fully populated HPE Apollo a6000 Chassis with max DC power up to 15.9 kW. The HPE Apollo 6000 Power Shelf with its redundant hot-plug power supplies can also be configured for single- or three-phase input.

The Apollo 6500 System: Your next accelerated computing solution.

Overview


Chassis and Accelerator Trays

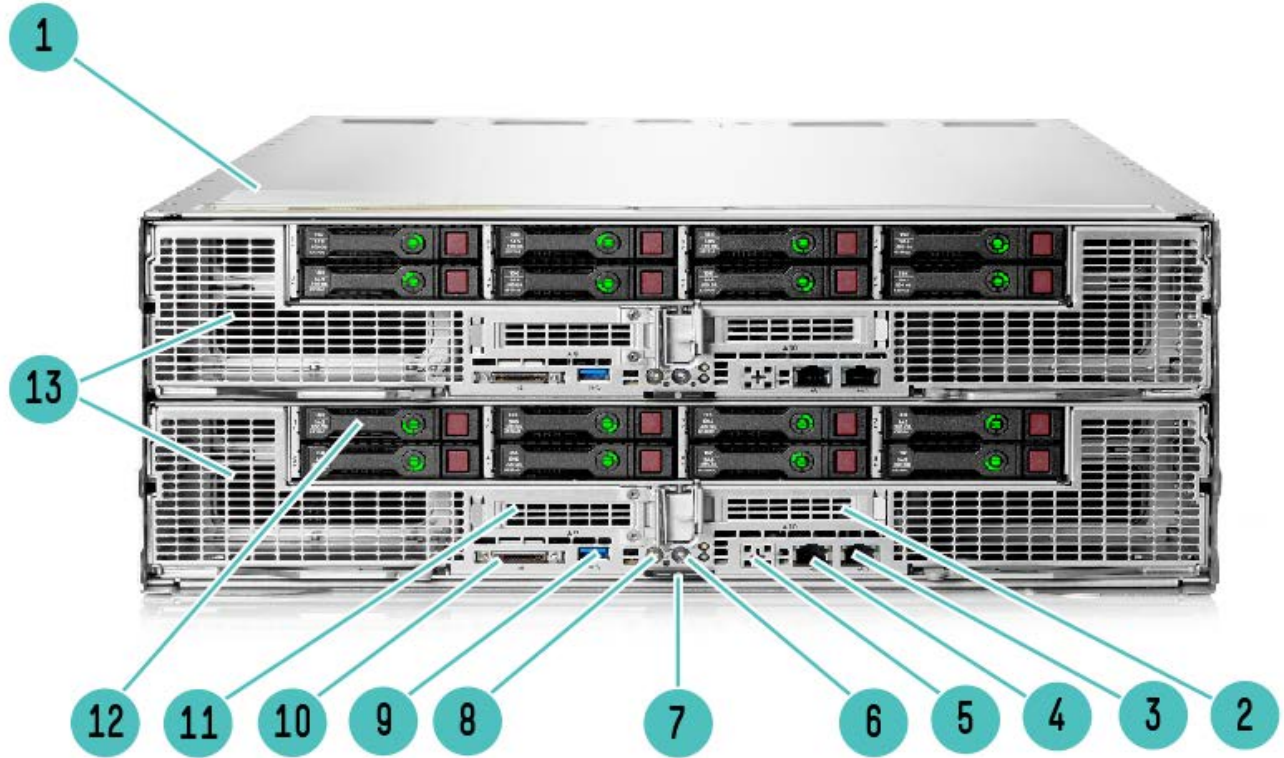

Item	Description
1	HPE Apollo 6500 Chassis (4U)
2	Low profile PCIe Gen3 x16 slot
3	Embedded 1Gb NIC 2
4	Embedded 1Gb NIC 1
5	Dedicated iLO Port (Optional) Low profile PCIe Gen3 x16 slot
6	Unit Identification (UID) LED/button
7	Server serial label pull tab
8	Power Button
9	USB 3.0 Connector
10	SUX(Serial/USB/Video) Connector
11	Low profile PCIe Gen3 x16 slot
12	8 SFF SAS/SATA Drive Bays
13	HPE ProLiant XL270d Accelerator Trays (2U/tray)

Overview


Back of the Chassis

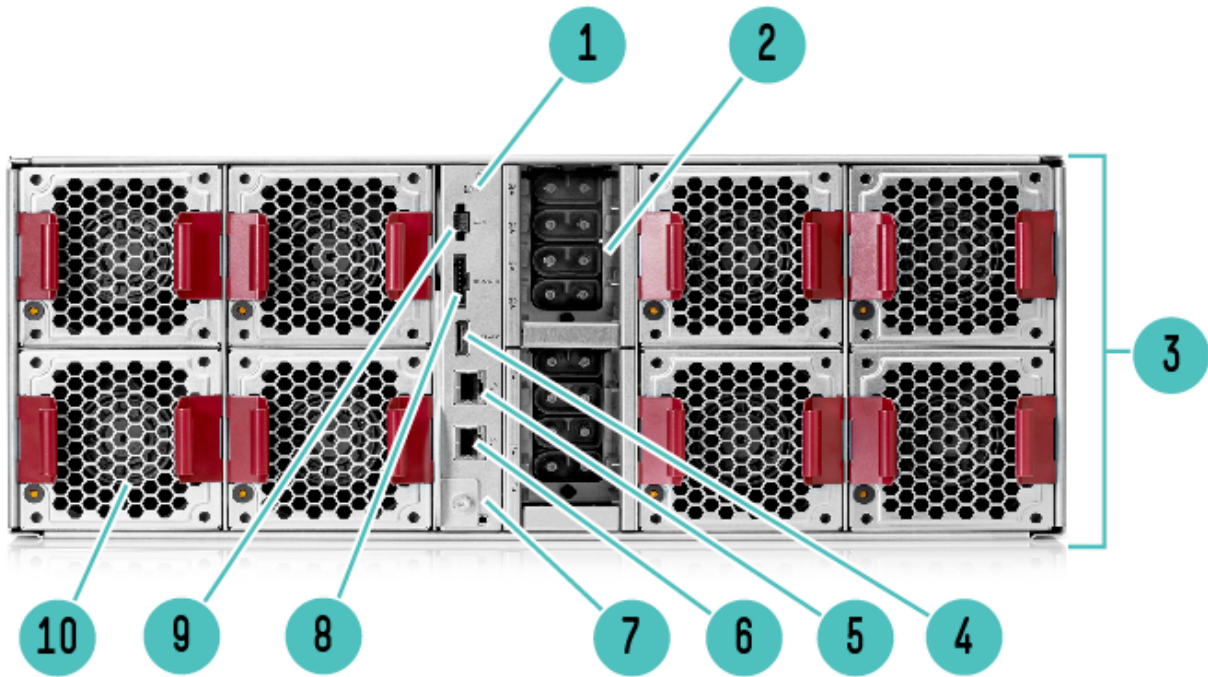

Item	Description
1	Unit Identification (UID) LED
2	Pass through power connections to Accelerator Tray
3	HPE Apollo 6500 Chassis
4	Power Shelf Data Connection
5	ILO connector
6	ILO connector
7	HPE Advanced Power Module ILO connector
8	HPE APMI 1.0 connector
9	Power Shelf Data Connection
10	Fan- 4 per Accelerator tray (required), 8 total per 6500 chassis with two Accelerator Trays

Overview

Front View

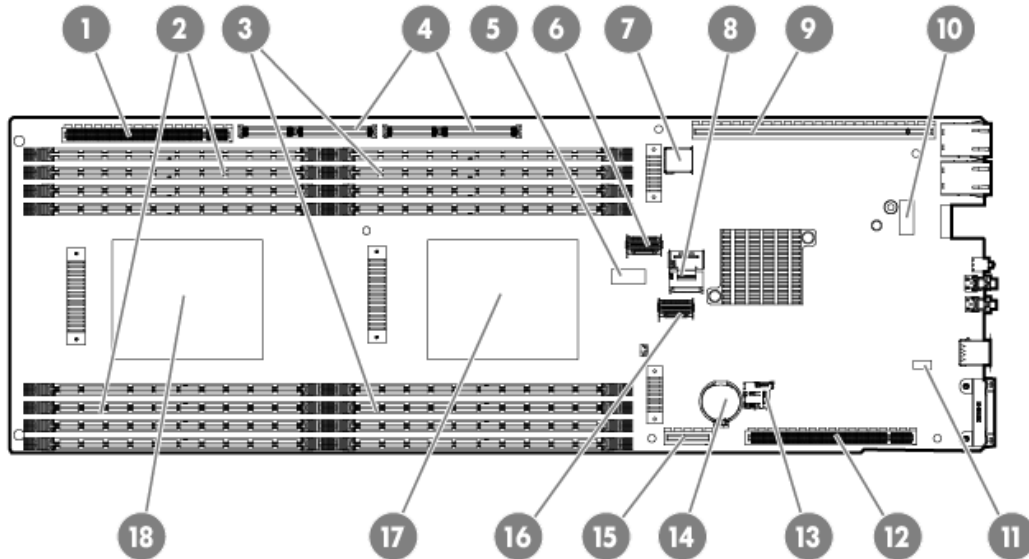

Item	Description	Item	Description
1	Bayonet board slot	10	Dedicated iLO port connector
2	DIMMs for processor 2	11	NMI header
3	DIMMs for processor 1	12	PCIe x16 riser board connector*
4	PCIe x40 riser board connector*	13	microSD slot
5	System maintenance switch	14	System battery
6	Mini-SAS connector 1 (SATA x4)	15	M.2 SSD riser connector
7	Internal USB 3.0 connector	16	TPM connector
8	Mini-SAS connector 2 (SATA x4)	17	Processor 1
9	PCIe x24 riser board connector*	18	Processor 2

Standard Features

Processor
One of the following depending on Model

E5-2600 v4 series Processors (Please follow product offering to fill out processor SKU)

NOTE: For more information regarding Intel Xeon processors, please refer to <http://www.intel.com/xeon>

Model	CPU frequency	Cores	L3 Cache	Power	QPI	DDR4 Hz
E5-2643V4	3.4GHz	6	20MB	135W	9.6GT/s	2400
E5-2650V4	2.2GHz	12	30MB	105W	9.6GT/s	2400
E5-2660V4	2.0GHz	14	35MB	105W	9.6GT/s	2400
E5-2667V4	3.2GHz	8	25MB	135W	9.6GT/s	2400
E5-2680V4	2.4GHz	14	35MB	120W	9.6GT/s	2400
E5-2683V4	2.1GHz	16	40MB	120W	9.6GT/s	2400
E5-2690V4	2.6GHz	14	35MB	135W	9.6GT/s	2400
E5-2695V4	2.1GHz	18	45MB	120W	9.6GT/s	2400
E5-2698V4	2.2GHz	20	50MB	135W	9.6GT/s	2400

Chipset

Intel® C610 Series Chipset

NOTE: For more information regarding Intel® chipsets, please see the following URL:

<http://www.intel.com/products/server/chipsets/>

On System Management Processor

HPE iLO (Firmware: HPE iLO 4)

NOTE: For more information, visit: <http://www.hp.com/go/ilo>

Memory Protection

Advanced ECC (multi-bit error protection)
Memory Online Spare Mode (Rank Spare Mode)

Memory

Type HPE SmartMemory
DDR4 Load Reduced (LRDIMM), or Registered (RDIMM)

DIMM Slots Available 16 DIMM Slots available

Maximum (LRDIMM) (per server tray) 1024GB (16 x 64GB)

NOTE: HPE memory from previous generation servers are not fully compatible with the HPE ProLiant XL270d Gen9 Server.

NOTE: To realize the performance memory capabilities listed in this document, HPE SmartMemory is required. For additional information, please see the HPE SmartMemory QuickSpecs at:

<https://www.hpe.com/h20195/v2/gethtml.aspx?docname=c04111535>

NOTE: LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

NOTE: Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, or 2400MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: <http://h22195.www2.hpe.com/MemoryTool/Home/Legal>

Network Controller Ethernet Options

HPE Ethernet 10Gb 2P 530SFP+ Adptr
HPE Ethernet 10Gb 2P 560SFP+ Adptr
HPE Ethernet 10Gb 2P 561T Adptr
HPE Ethernet 10Gb 2-port 562SFP+ Adptr
HPE Ethernet 1Gb 4-port 366T Adapter
HPE Ethernet 10G 2-port 546SFP + Adptr
HPE XL170r/190r Dedicated NIC IM Board Kit
HPE Ethernet 1Gb 4-port 331T Adapter
HPE Ethernet 10Gb 2-port 572SFP+ Adptr

Standard Features

HPE Ethernet 10Gb 2P 530T Adptr
 HPE Ethernet 1Gb 2P 361T Adptr
 HPE Ethernet 1Gb 2P 332T Adptr

InfiniBand Options

HPE IB FDR/EN 40Gb 2P 544+QSFP Adptr
 HPE IB EDR/EN 100Gb 1P 840QSFP28 Adptr
 HPE IB EDR/EN 100Gb 2P 840QSFP28 Adptr

HPE Intel Omni-Path Adapters

HPE 100Gb 1p OP101 QSFP28 x16 OPA Adapter
 HPE 100Gb 1p OP101 QSFP28 x8 OPA Adapter

Expansion Slots (EE)

Expansion Slot #	Technology	Bus Width*	Source	Connector Width	Form Factor
1	PCIe 3.0	x16	CPU1	x16	Low profile
Expansion Slot #	Technology	Bus Width*	Source	Connector Width	Form Factor
2	PCIe 3.0	X16	Dependent on GPU Riser Selection	x16	Low profile

GPGPU Slots

Expansion Slot #	Technology	Bus Width*	Source	Connector Width	Form Factor
1	PCIe 3.0	x16	CPU1	x16	Low profile
Expansion Slot #	Technology	Bus Width*	Source	Connector Width	Form Factor
2	PCIe 3.0	X16	Dependent on GPU Riser Selection	x16	Low profile


NOTE:*Indicates the number of physical electrical lanes running to the connector.

Expansion Slot #	Technology	Bus Width*	Source	Connector Width
1-4	PCIe 3.0	x16	Dependent on GPU Riser Selection	x16
Expansion Slot #	Technology	Bus Width*	Source	Connector Width
5-8	PCIe 3.0	X16	Dependent on GPU Riser Selection	x16


NOTE: The XL270d supports two different GPGPU riser options. The first option HPE XL270d Gen9 8:1 Module Riser Kit (850500-B21) supports all GPGPUs and both low profile PCI slots on CPU1. The second option HPE XL270d Gen9 4:1 Module Riser Kit (850508-B21) supports the connection of GPGPU slot 5-8 and low profile slot 2 to CPU 2.
 HPE XL270d Gen9 8:1 Module Riser Kit (850500-B21) Topology

HPE XL270d Gen9 8:1 Module Riser Kit (850500-B21) Topology

Standard Features

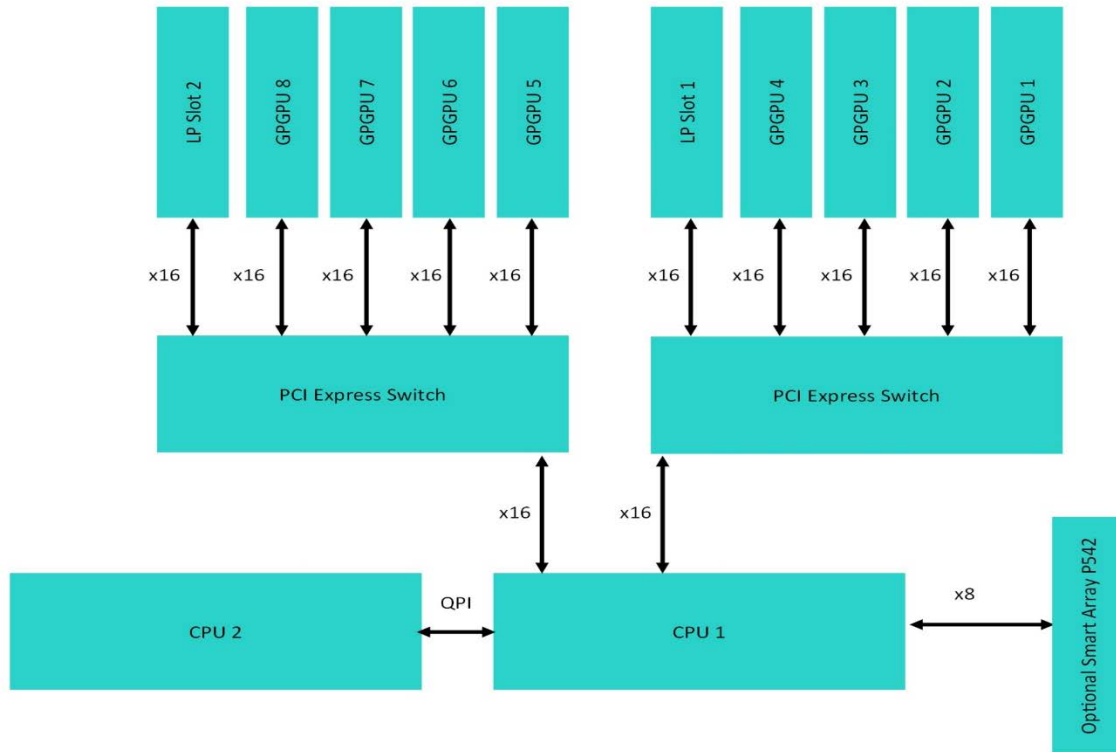

HPE XL270d Gen9 4:1 Module Riser Kit (850508-B21) Topology

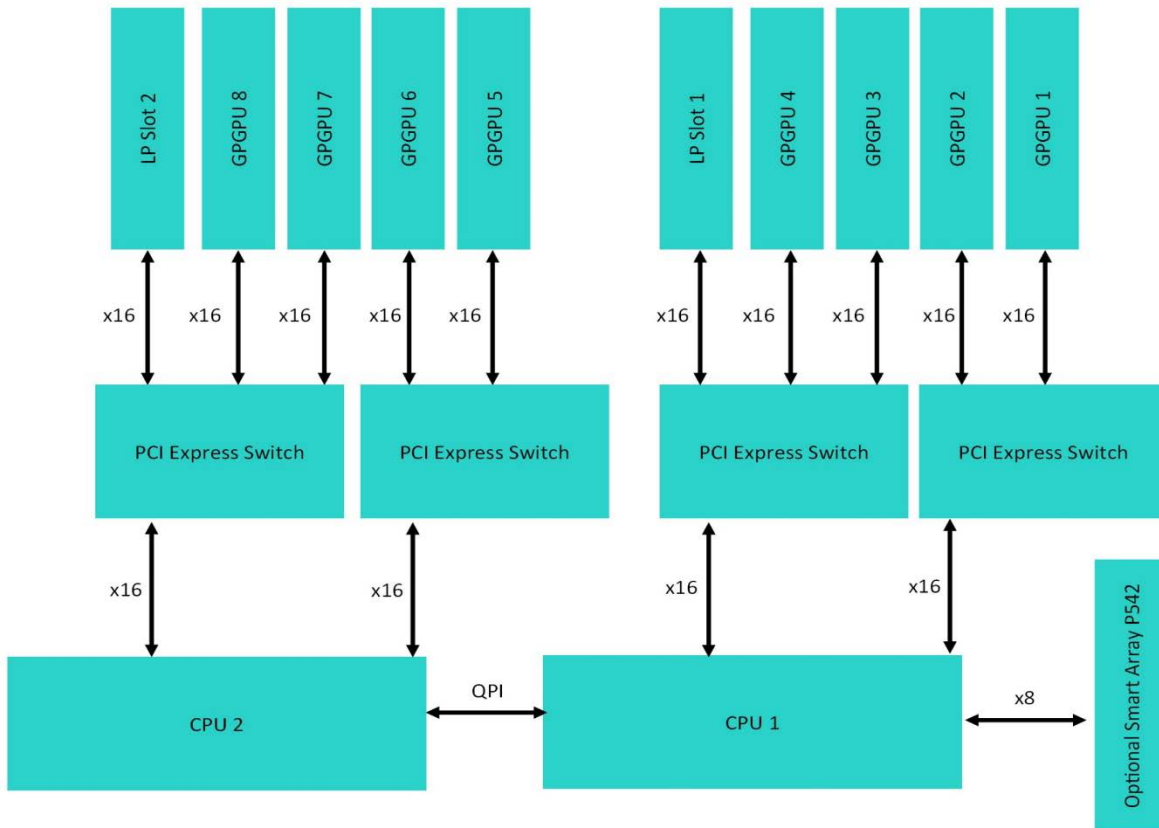

HPE Server ROM

HPE ROM (Read Only Memory) is now digitally signed using the Hewlett Packard Enterprise Corporate Signing Service. This signature is verified before the flash process starts, reducing accidental programming and preventing malicious efforts to corrupt system ROM.

Standard Features

HPE ROM provides for essential initialization and validation of hardware components before control is passed to the customer-installed operating system. The ROM also provides the capability of booting from various fixed media (HDD, CD-ROM) and removable media (USB), to continue operation to the operating system.

HPE ROM performs very early configuration of the video controller, to allow monitoring of initialization progress via an attached monitor. If configuration or hardware errors are discovered during this early phase of hardware initialization, suitable messages are now displayed on the connected monitor. Additionally, these configuration or hardware errors are logged to the Integrated Management Log (IML) to assist in diagnosis. The HPE ProLiant ROM is used to configure the following:

- Processor and chipset status registers
- System memory, memory map, and memory initialization
- System hardware configuration (Integrated PCI devices and optional PCIe cards).
- Customer-specific BIOS configuration (using the HPE ROM-Based Setup Utility (RBSU)).

NOTE: For further information, please refer to the HPE RBSU (ROM based setup utility) user guide: <http://www.hpe.com/support/rbsu>.

HPE Server Unified Extensible Firmware Interface (UEFI) or Legacy Mode

The HPE ProLiant System BIOS is an EDK2 UEFI solution, and adheres to the latest revisions of UEFI Class 2 specifications which supports both legacy boot and UEFI boot operation. The HPE ProLiant XL270d Gen9 defaults to UEFI boot operation and can be factory or field configured for Legacy boot operation.

NOTE: For UEFI boot operation, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: For more information on the Hewlett Packard Enterprise ProLiant System BIOS and UEFI, see the UEFI Information Library: <http://www.hp.com/go/uefi/docs>

NOTE: HPE Legacy FIO Mode Setting (758959-B22) can be selected to configure the system in UEFI mode in the factory.

To modify the server configuration ROM default settings, press F9 in the HPE ProLiant POST screen to enter the UEFI System Utilities screen. By default, the System Utilities menus are in the English language. UEFI enables numerous new capabilities, including both industry standard functionality and features specific to HPE ProLiant servers. Following are some of the features that UEFI enables and that the HPE ProLiant XL270d Gen9 can support when configured for UEFI boot operation:

- Secure Boot - A new feature in which the system firmware, option card firmware, operating systems, and software collaborate to greatly enhance platform security.
- Operating system specific functionality - Microsoft Windows 2012 supports several features only when installed in UEFI mode.
- Support for > 2.2 TB (using GPT) boot drives - Such drives could previously only be used for boot drives when using RAID solutions such as HPE Smart Array.
- UEFI Shell - Provides a pre-boot environment for running scripts and tools. The HPE ProLiant UEFI Shell provides both standard capabilities as well as numerous enhancements.
- PXE boot support for IPv6 networks.
- PXE Multicast Boot allowing for faster PXE deployments for large numbers of servers.
- Boot support for option cards that only support a UEFI option ROM.

NOTE: When the server is configured for UEFI Boot Mode, PXE servers must be configured with a UEFI boot image. When the server boots in UEFI mode, it does not boot media with a legacy OS installation. This includes DOS targets and Windows or Linux systems installed in Legacy mode. The reverse is also true for servers that boot in Legacy mode. If Microsoft Windows 2008 or Windows 2008 R2 is used in UEFI Boot Mode, UEFI Optimized Mode must be disabled (this option is enabled by default). This is required to work around an issue in Windows 2008 / 2008 R2 that requires legacy BIOS components necessary for video operations in Windows.

Storage Controller

NOTE: For optional array, the HPE Smart Array P542D- XL270d Gen9 Svr is the primary solution. A unique PCIe connection has been designed into the XL270d for this RAID controller. Use of any other RAID controllers will use one of the Low Profile PCIe slots that are typically used for fabric interconnects

Embedded Software RAID HPE Dynamic Smart Array B140i Controller (SATA Only)

Standard Features

RAID Controller	HPE Smart Array P542D - XL270d Gen9 Svr (SAS/SATA) NOTE: This is the recommended RAID controller choice. HPE Smart Array P440/4G Controller (SAS/SATA) HPE Smart Array P441/4G Controller (SAS/SATA)	
Host Bus Adapter	HPE H240 Smart Host Bus Adapter (SAS/SATA) HPE H241 Smart HBA (SAS/SATA)	
Storage Controller Cable Kits	HPE XL270D B140i Cbl FIO Kit HPE XL270D Gen9 Mini-SAS H240 Cbl Kit HPE XL270D Gen9 Mini-SAS P440 Cbl Kit NOTE: The embedded B140i will operate in UEFI mode only. For legacy support, AHCI mode is required.	

Internal Storage Devices

Internal MicroSD slot

Maximum Internal Storage

Hot Plug SFF SAS 7.2k	8TB	8x 1.0TB
Hot Plug SFF SAS 10k	14.4TB	8x1.8TB
Hot Plug SFF SAS 15k	4.8TB	8x600GB
Hot Plug SFF SATA	8TB	8x1TB
Hot Plug SFF SATA SSD	30.7TB	8x3.84TB
Hot Plug SFF SAS SSD	15.4TB	8x1.92TB

Interfaces

KVM	Serial USB Video Port (SUV)
MicroSD	1 (internal)
USB Ports	2 (external via SUV); 1 USB 3.0 (external); 1 (USB 3.0 internal)
HPE iLO Remote Management Network Port	Aggregated via HPE Apollo 6500d Chassis; Option for dedicated NIC IM Board Kit
Health LED	1
Power	1
UID	1
Do not remove LED	1

Industry Standard Compliance

ACPI 2.0b Compliant
PCIe 3.0 Compliant
WOL Support
Microsoft® Logo certifications
PXE Support
USB 1.1,2.0 and 3.0 Compliant
SMBIOS 2.6.1

Power Specifications

To review typical system power ratings use the HPE Power Advisor which is available via the online tool located at URL: <http://www.hp.com/go/proliant-energy-efficient> or <http://www.hp.com/go/hppoweradvisor>
NOTE: Power Specification and Technical Content for supported power supplies can be found at <https://www.hpe.com/h20195/v2/gethtml.aspx?docname=c04111541>

Operating Systems and Virtualization Software Support for ProLiant Servers

Microsoft Windows Server 2012 R2
Red Hat Enterprise Linux (RHEL) 6.7, 7.2
SUSE Linux Enterprise Server (SLES) 11 SP4, 12
NOTE: Only 64-bit versions of these operating systems are supported.
NOTE: For more information on the Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server including how to purchase from Hewlett Packard Enterprise , please visit our OS Support Site at:

Standard Features

<http://www.hp.com/go/ossupport> and our driver download page: <http://www.hp.com/support>

Graphics	Integrated Matrox G200 video standard <ul style="list-style-type: none"> • 1280 x 1024 (32 bpp) • 1920 x 1200 (16 bpp) • HPE iLO 4 On System Management Memory • 16 MB Flash • 256 MB DDR 3 with ECC (112 MB after ECC and video)
Form Factor	The ProLiant XL270d Gen9 Server is a single-slot tray for the HPE Apollo 6500d Chassis.
Embedded Management	<p>HPE Integrated Lights Out Monitor your servers for ongoing management, service alerting, reporting and remote management with iLO. Learn more at http://www.hp.com/go/ilo</p> <p>UEFI Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at http://www.hp.com/go/ProLiant/uefi</p> <p>HPE RESTful API RESTful API is an application programming interface. RESTful Web Service API served by iLO's web server http://www.hp.com/go/restfulapi</p> <p>Intelligent Provisioning Provision servers by discovering and deploying 1 to few servers with Intelligent Provisioning. Learn more at http://www.hp.com/go/intelligentprovisioning.</p>
Server Utilities	<p>HPE Smart Update Optimize firmware and driver updates with HPE Smart Update solutions. Learn more at http://www.hp.com/go/smartupdate.</p> <p>HPE Systems Insight Manager (HPE SIM) HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-Hewlett Packard Enterprise servers. HPE SIM also integrates with HPE SUM to provide quick and seamless firmware updates. Learn more at http://www.hp.com/go/sim</p> <p>Scripting Tool Kit and Windows PowerShell Provision 1 to many servers using your own scripts to discover and deploy them with HPE Scripting Tool Kit for Windows and Linux or HPE Scripting Tools for Windows PowerShell. Learn more at http://www.hp.com/go/ProLiantSTK or http://www.hp.com/go/powershell</p> <p>HPE RESTful Interface Tool HPE RESTful API tool is a scripting tool to provision servers using RESTful API Interface to discover and deploy servers at scale. Learn more at http://www.hp.com/go/restfulapi</p> <p>HPE iLO Mobile Application Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: http://www.hp.com/go/ilo/mobileapp</p> <p>HPE Insight Online HPE Insight Online, available at no additional cost as part of your Hewlett Packard Enterprise warranty, Care Pack or contractual support agreement with Hewlett Packard Enterprise, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at http://www.hp.com/go/insightonline/info.</p>
Embedded Management	HPE Integrated Lights Out Monitor your servers for ongoing management, service alerting, reporting and remote management with iLO. Learn more at http://www.hp.com/go/ilo .
HPE Insight management software	HPE Service Pack for ProLiant (SPP) HPE Service Pack for ProLiant (SPP) and HPE Smart Update Manager (HPE SUM) provide a comprehensive approach to firmware and system software maintenance. Together they provide better operating stability and ensure maximum uptime. The SPP will be updated at a predictable cadence, typically coinciding with new Hewlett Packard Enterprise server hardware launches. By enabling firmware to be updated online and integrating firmware and

Optional Features

system software updates in one operation, HPE SUM and the SPP offer faster updates of individual servers and dramatically faster updates of entire HPE Apollo 6500 Chassis. Further improving system uptime and stability is the fact that Hewlett Packard Enterprise provides 12 months of support for each Service Pack for ProLiant release (may vary by region).

The user experience around HPE SUM and the SPP has been improved in several ways, starting with the web download. A single web page provides access to a single download containing both the latest version of HPE SUM and the latest SPP. Optional smaller subsets with only specific types of servers or specific operating systems are offered to save on download time. The HPE SUM application provides a straightforward, intuitive user interface that guides the user through the steps of discovery, analyses and update, providing comprehensive information on available updates, criticality and interdependencies. This information is also available in reports. By providing the option of multiple local or shared repositories which can be easily updated from hp.com, HPE SUM provides the tools to optimize stability and consistency throughout the company. While HPE SUM and the SPP recommend the combinations of firmware and system software that Hewlett Packard Enterprise has found to be the best practice, the application gives customers the flexibility to set their own specific baseline.

The Service Pack for ProLiant has been rigorously tested with specific attention for interaction between firmware, drivers and agents both within the server as well as in interaction with the HPE Apollo 6500 chassis. This testing ensures the highest quality as well as providing the input for HPE SUM to deploy updates taking into account all interdependencies, when determining the correct updates and order of update deployment.

NOTE: The Service Pack for ProLiant (which includes HPE SUM) can be downloaded from <http://www.hp.com/go/spp/download>. More information can be found: <http://www.hp.com/go/SmartUpdate> <http://www.hp.com/go/spp> and <http://www.hp.com/go/hpsum>

Security

Power-on password
 Keyboard password
 Serial interface control
 Administrator's password
 iLO 4 (Integrated Lights-Out 4) has 12 customizable user accounts and SSL encryption
 iLO 4 can be disabled via a Global Setting
 iLO Advanced supports directory services integration
 TPM (Trusted Platform Module) 2.0 option

Chassis

Each HPE Apollo 6500 Chassis is built with the following:

- Two 2U slots for an Accelerator Tray
- HPE Advanced Power Manager Module
- Four (4) dual rotor 80x80x86mm fans per tray required

Server Tray Blank Kit

A chassis requires that the two (2) server tray slots be populated with either an HPE ProLiant XL270d, server or an HPE Apollo 6500 Server Node Blank Kit (850887-B21).

Rack Airflow Requirements

HPE Apollo 6500 Chassis
 The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. For maximum cooling, HPE racks are recommended to allow these racks to be fully loaded with servers using the latest processors.

CAUTION: Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This

Optional Features

arrangement ensures proper airflow. Using a rack without blanking panels will result in improper cooling that can lead to thermal damage

HPE Insight Management software

Insight Management

Managing the growing number of servers can be complex and expensive for your organization. IT managers need to address changing business needs with tools that meet the challenges of managing today's complex Datacenters.

HPE Insight Management lowers the cost of running your HPE ProLiant servers by providing you with best-in-class management tools, including HPE Insight Control, HPE Virtual Connect Enterprise Manager (VCEM), and HPE Insight Dynamics/Matrix Operating Environment. Insight Management increases your productivity and reduces your operating costs to get you higher value from your HPE ProLiant servers.

Electronic download of Insight Management Media
Insight Management software media is available for free download (not including license entitlement certificates) at this website:

<http://www.hp.com/go/insightupdates>

Software media available for download includes:

- HPE Insight Control
- HPE Insight Control for Microsoft® System Center
- HPE Insight Control for VMware vCenter Server
- HPE Virtual Connect Enterprise Manager (VCEM)
- HPE Insight Dynamics / Matrix Operating Environment

Customers will receive an Insight Control or Insight Dynamics license entitlement certificate via physical shipment or email. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s).

One year of 24x7 Software Technical Support and Updates are included with your purchased licenses.

Hewlett Packard Enterprise provides a complete range of installation and support services to ensure the successful deployment and operations of your server infrastructure. For more information about support services and licensing options, see the following website:

<http://www.hp.com/go/insightsoftware>

Insight Software Media Kit (DVDs)

Physical media (DVDs) are also available for purchase from Hewlett Packard Enterprise or from your authorized reseller

Service Pack for ProLiant

Customers should use the HPE Service Pack for ProLiant (SPP) to perform firmware, driver, and related software updates.

- SPP main webpage: <http://www.hp.com/go/spp>
- SPP downloads webpage:
<http://www.hp.com/go/spp/download>

HPE Integrated Lights-Out (iLO)

HPE Integrated Lights-Out (iLO) simplifies server setup, health monitoring, power and thermal control, and lights-out remote administration of ProLiant SL, XL, ML, DL, and BL servers. HPE iLO functions without additional software and can be accessed from any location via a web

Optional Features

	<p>browser. HPE iLO works hand-in-hand with HPE Systems Insight Manager, Insight Control and Insight Dynamics for ProLiant, helping customers unleash the value of the ProLiant platform and deliver the highest possible quality of IT service. For more information, visit: http://www.hp.com/go/iLO.</p>
HPE Insight Control	<p>HPE Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see http://www.hp.com/go/insightcontrol</p> <p>HPE Insight Control includes one year of 24 x 7 HPE Software Technical Support and Update Service ensuring rapid access to Hewlett Packard Enterprise support staff and proactive delivery of software updates. For more information about this service, please visit: http://www.hpe.com/services/insight.</p>
HPE Advanced Power Manager	<p>The HPE Advanced Power Manager (HPE APM) is an optional rack level solution. HPE APM will automatically discover hardware components and enable server level power on and off, server metering, aggregate dynamic power capping, configurable power-up dependencies and sequencing, consolidated Ethernet access to all resident iLOs, and asset management capabilities. HPE APM features rack level event logging, RADIUS authentication, integrated serial concentrator, up to 11 local user accounts, read only service port, and supports SNMP, SSH, Syslogd, telnet.</p> <p>NOTE: use either the HPE APM port or an iLO port to connect to a network.</p>

Warranty

Warranty

This product is covered by a global limited warranty and supported by Hewlett Packard Enterprise Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners. Hardware diagnostic support and repair is available for three year from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty

NOTE: Server Warranty includes 3 year Parts, 3 year Labor, 3-year on-site support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/index.aspx#.V-wJOWb2ZPZ>

NOTE: In Asia Pacific, Japan and China, Server Warranty includes 3 years Parts, 3 year Labor, 3-year Onsite support with next business day response

Service and Support

Protect your business beyond warranty with HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support for need for your IT and business. Protect your product, beyond warranty.

Connect your devices: Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%¹ reduction in down time, near 100%² diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support.

1-IDC 2015

2-HPE CSC reports 2014 – 2015

Learn more about getting connected at <http://www.hpe.com/services/getconnected>

HPE 3 Year Proactive Care 24x7 Apollo 6500 Service (H2DW0E)

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to Hewlett Packard Enterprise, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This Service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your Hewlett Packard Enterprise servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

HPE 3 Year Foundation Care 24x7 Apollo 6500 Service (H2DV7E)

HPE Foundation Care 24x7 gives you access to Hewlett Packard Enterprise 24 hours a day, seven days a week for assistance on resolving issues. This service includes need based Hardware onsite response within four hours. In addition, collaborative software support is included in this service that provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

<https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>

HPE 3 Year Foundation Care Next Business Day Apollo 6500 Service (H2DU8E)

HPE Foundation Care Next Business Day connects you to Hewlett Packard Enterprise during business hours for assistance on resolving issues – This service features need based next business day hardware onsite response and software call back within two hours. In addition, Collaborative software support and provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

<https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

HPE Server Hardware Installation (U5V60E Installation, U5V62E Installation and Startup)

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf>

HPE Factory Express HPE Factory Express offers configuration, customization, integration and deployment services for Hewlett

Service and Support

for Servers and storage

Packard Enterprise servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. Hewlett Packard Enterprise products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAxxx3PAR suite, XP, rackable tape libraries and configurable network switches.

HPE Technology Services Support Credits offer flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

HPE Datacenter Care service

HPE Datacenter Care helps improve IT stability and security, increase the value of IT, and enable agility and innovation. It is a structured framework of repeatable, tested, and globally available services “building blocks.” You can deploy, operate, and evolve your datacenter wherever you are on your IT journey. With HPE Datacenter Care, you benefit from a personalized relationship with Hewlett Packard Enterprise via a single point of accountability for Hewlett Packard Enterprise and others’ products. For more information, visit <http://www.hpe.com/services/datacentercare>

HPE Flexibly Capacity, a building block of HPE Datacenter Care is a pay per use model for on premise infrastructure, giving you the technology you want, the ability to manage capacity when you need it, with no upfront payment. Flexible Capacity provides the needed room to grow your environment, but only pay for actual metered use. Technology transitions with refresh can be built in, and infrastructure and services are billed monthly, enabling you to align costs to business use.

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

NOTE: FIO indicates that this option is only available as a factory installable option.

NOTE: The HPE Apollo 6500 Chassis is required to support the server.

Step 1: Choose a Chassis

HPE Chassis	HPE Apollo d6500 4U Configure-to-order Chassis	845627-B21
--------------------	--	------------

Step 2: Choose cooling options

HPE Cooling Options	HPE Apollo d6500 Server Node Blank Kit	850887-B21
----------------------------	--	------------

NOTE: Required for any non-populated slots in the chassis to prevent thermal related issues and required for Advanced Power Manager (APM) 1.2 or APM 2.0

	HPE Apollo d6500 Fan Module Kit	852155-B21
--	---------------------------------	------------

NOTE: One fan kit required per Accelerator Tray

Step 3: Choose the following rail kit and handles per chassis

HPE Rail Kits and	HPE s6500 4U Rail Kit	599109-B21
--------------------------	-----------------------	------------

Chassis Handle	HPE s6500 Chassis Handles Kit	608477 B21
-----------------------	-------------------------------	------------

	HPE s6500 4U 3rd Party Rail Kit	601946-B21
--	---------------------------------	------------

NOTE: Hewlett Packard Enterprise recommends that a minimum of two people are required for all rack installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

Step 4: Choose Base Accelerator Tray configuration

Server Tray	HPE ProLiant XL270d Gen9 Accelerator Tray 2U Configure-to-order Server	845628-B21
--------------------	--	------------

NOTE: Up to 2 full width server trays (XL270d Gen9) can be added to the HPE Apollo 6500 Chassis.

Step 5: Choose Accelerator or Coprocessor Options

Accelerator options	HPE NVIDIA Tesla P100 PCIe 16GB Computational Accelerator	Q0E21A
----------------------------	---	--------

	HPE NVIDIA Tesla M40 24GB Computational Accelerator	P8Y46A
--	---	--------

	HP NVIDIA Tesla K80 Dual GPU PCIe Computational Accelerator	J0G95A
--	---	--------

	HP AMD FirePro S9150 Accelerator Kit	J0H11A
--	--------------------------------------	--------

NOTE: Appropriate enablement kit must be purchased to support accelerator choices. Each enablement kit supports up to eight (8) GPU.

	HPE XL270d Gen9 1-8 NVIDIA GPU w/o K40 Enablement Kit	852162-B21
--	---	------------

	HPE XL270d Gen9 1-8 K40 GPU Enablement Kit	853651-B21
--	--	------------

	HPE XL270d Gen9 1-8 S9150 GPU Enablement Kit	852164-B21
--	--	------------

Step 6: Choose Appropriate Riser Topology

Topology options	NOTE: Solid black lines in diagrams below represent PCIe Gen3
-------------------------	--

NOTE: Only one riser kit per server. Riser kits can be ordered and installed by customers to allow testing alternative configurations. Please see Administrator and User Guide for installation instructions.

NOTE: For NVIDIA Tesla K80, the HPE XL270d Gen9 4:1 Module Riser Kit is

Configuration Information - Factory Integrated Models



recommended. GPUDirect is not supported for more than 8 logical GPU per CPU, and as the K80 contains two logical GPU per card, the 8:1 configuration will not support GPUDirect.

HPE XL270d Gen9 8:1 Module Riser Kit

850500-B21

HPE XL270d Gen9 4:1 Module Riser Kit

850508-B21

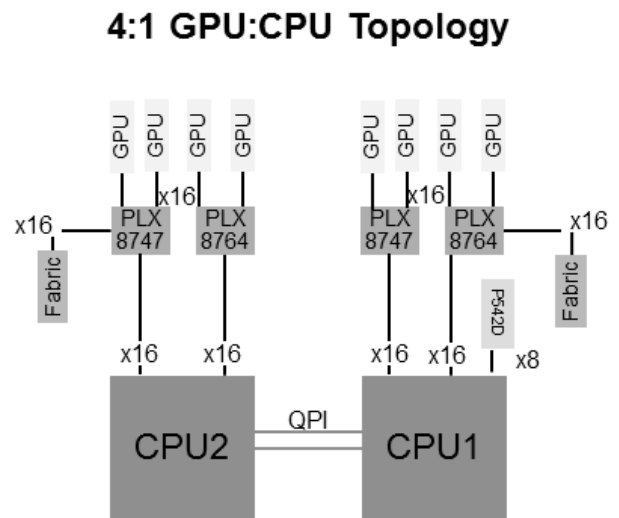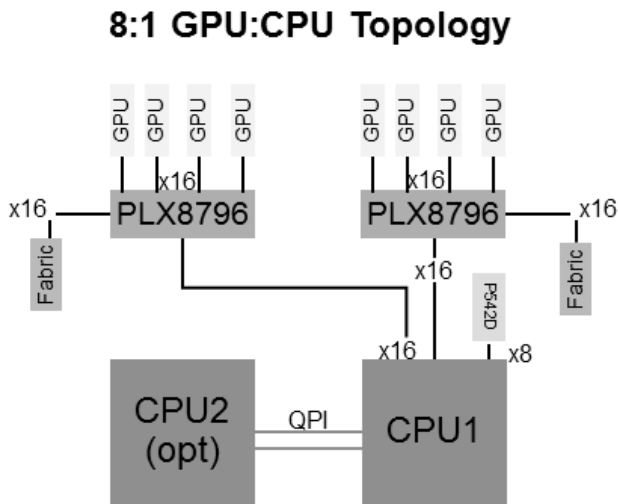

Step 7: Choose E5-2600v4 series Processors

Topology options

NOTE: If two processors are desired, select one xxxxxx-L21 and one xxxxxx-B2

NOTE: in the 8:1 GPU to CPU topology CPU 2 (xxxxxx-B21) is optional

HPE XL270d Gen9 4:1 Module Riser Kit	850508-B21
HPE XL270d Gen9 Intel® Xeon® E5-2643 v4 (3.4GHz/6-core/20MB/135W) Processor Kit	853926-B21
HPE XL270d Gen9 Intel® Xeon® E5-2643 v4 (3.4GHz/6-core/20MB/135W) FIO Processor Kit	853926-L21
HPE XL270d Gen9 Intel® Xeon® E5-2650 v4 (2.2GHz/12-core/30MB/105W) Processor Kit	853930-B21
HPE XL270d Gen9 Intel® Xeon® E5-2650 v4 (2.2GHz/12-core/30MB/105W) FIO Processor Kit	853930-L21
HPE XL270d Gen9 Intel® Xeon® E5-2660 v4 (2.0GHz/14-core/35MB/105W) Processor Kit	853932-B21
HPE XL270d Gen9 Intel® Xeon® E5-2660 v4 (2.0GHz/14-core/35MB/105W) FIO Processor Kit	853932-L21
HPE XL270d Gen9 Intel® Xeon® E5-2667 v4 (3.2GHz/8-core/25MB/135W) Processor Kit	853934-B21
HPE XL270d Gen9 Intel® Xeon® E5-2667 v4 (3.2GHz/8-core/25MB/135W) FIO Processor Kit	853934-L21
HPE XL270d Gen9 Intel® Xeon® E5-2680 v4 (2.4GHz/14-core/35MB/120W) Processor Kit	853938-B21
HPE XL270d Gen9 Intel® Xeon® E5-2680 v4 (2.4GHz/14-core/35MB/120W) FIO Processor Kit	853938-L21
HPE XL270d Gen9 Intel® Xeon® E5-2683 v4 (2.1GHz/16-core/40MB/120W) Processor Kit	853940-B21

Configuration Information - Factory Integrated Models

HPE XL270d Gen9 Intel® Xeon® E5-2683 v4 (2.1GHz/16-core/40MB/120W) FIO Processor Kit	853940-L21
HPE XL270d Gen9 Intel® Xeon® E5-2690 v4 (2.6GHz/14-core/35MB/135W) Processor Kit	853942-B21
HPE XL270d Gen9 Intel® Xeon® E5-2690 v4 (2.6GHz/14-core/35MB/135W) FIO Processor Kit	853942-L21
HPE XL270d Gen9 Intel® Xeon® E5-2695 v4 (2.1GHz/18-core/45MB/120W) Processor Kit	853944-B21
HPE XL270d Gen9 Intel® Xeon® E5-2695 v4 (2.1GHz/18-core/45MB/120W) FIO Processor Kit	853944-L21
HPE XL270d Gen9 Intel® Xeon® E5-2698 v4 (2.2GHz/20-core/50MB/135W) Processor Kit	853948-B21
HPE XL270d Gen9 Intel® Xeon® E5-2698 v4 (2.2GHz/20-core/50MB/135W) FIO Processor Kit	853948-L21

Step 8: Choose HPE Memory

DDR4 SmartMemory Registered DIMMs (RDIMMs) for E5-2600v4 Series

HP 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805347-B21
HP 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805349-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805351-B21

Load Reduced DIMMs (LRDIMMs) for E5-2600v4 Series

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit	805353-B21
HPE 64GB (1x64GB) Quad Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit	805358-B21

Step 9: Choose Storage Controller options

NOTE: HPE Smart Array P542D - XL270d Gen9 Svr is the primary storage controller solution. A unique PCIe connection has been designed into the XL270d for this RAID controller. Use of any other controllers will use one of the Low Profile PCIe slots that are typically used for fabric interconnects.

NOTE: Each controller requires a matching cable kit.

NOTE: The P542D is the recommended array choice.

RAID Controller Choices

HPE Smart Array P542D/2GB Controller for ProLiant XL270d Gen9 Server	851508-B21
HP 12W Smart Storage Battery with Plug Connector for BL Servers	782961-B21

NOTE: HPE Smart Array controller kits do not include the HPE XL2xx 12W w/plg Smart Storage Battery, the backup power source necessary to protect the data on the Flash-backed Write Cache and should be purchased separately.

Embedded Software RAID

HPE H240 12Gb 2-ports Int Smart Host Bus Adapter	726907-B21
--	------------

Host Bus Adapter

HPE XL270d Gen9 Mini SAS B140 Cable Kit	852066-B21
---	------------

Storage Controller Cable Kits

HPE XL270d Gen9 Mini SAS H240 Cable Kit	852063-B21
HPE XL270D Gen9 Mini-SAS H240 Cbl Kit	
HPE XL270d Gen9 Mini SAS P440 Cable Kit	852060-B21

Configuration Information - Factory Integrated Models

NOTE: The embedded B140i will operate in UEFI mode only. For legacy support, AHCI mode is required.

Step 10: Choose Hard drives or SSD options

NOTE: Each HPE ProLiant XL270d Gen9 Accelerator Tray supports up to eight (8) 2.5" drives. Add Hard drive blank kit to fill drive bays not used for storage.

HPE Small Form Factor Hard Drive Blank Kit 666987-B21

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty HDD 759212-B21

HPE 450GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty HDD 759210-B21

HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e HDD 791034-B21

HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive 718162-B21

HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652583-B21

HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652564-B21

SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD 832514-B21

NOTE: Each HPE ProLiant XL270d Gen9 Accelerator Tray supports up to eight (8) 2.5" drives. Add Hard drive blank kit to fill drive bays not used for storage.

12G SAS Mixed Use Hot Plug SFF (2.5-inch) Solid State Drives

HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty SSD 846436-B21

HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty SSD 846434-B21

12G SAS Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives

HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD 779168-B21

12G SAS Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives

HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty SSD 779168-B21

6G SATA Hot Plug SFF (2.5-inch) SC Mixed Use Solid State Drives

HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 817011-B21

HPE 1.6TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 804631-B21

HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 816995-B21

HPE 800GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 804625-B21

HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 832414-B21

HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 816985-B21

HPE 200GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty SSD 804613-B21

6G SATA Hot Plug SFF (2.5-inch) SC Write Intensive Solid State Drives

HPE 1.2TB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD 804677-B21

HPE 800GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD 804671-B21

HPE 200GB SATA 6G Write Intensive SFF (2.5in) SC 3yr Wty SSD 804639-B21

6G SATA Hot Plug SFF (2.5-inch) SC Read Intensive Solid State Drives

HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 816929-B21

HPE 1.6TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 804605-B21

HPE 800GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 804599-B21

HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 804593-B21

HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 804587-B21

HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD 816889-B21

Configuration Information - Factory Integrated Models

HPE 120GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD	804581-B21
HPE 80GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD	804575-B21
HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty SSD	816929-B21

Step 11: Fabric and Networking options

InfiniBand Options

NOTE: The HPE ProLiant XL270d Gen9 Accelerator Tray supports three total x8 PCIe Gen3 options. Two low profile slots primary intended for the networking, and a third dedicated connection designed to support the HPE Smart Array P542D - XL270d Gen9 Svr (SAS/SATA).

NOTE: Use of the HPE Smart Array P542D controller will leave two low profile PCIe for the fabric. Any other RAID controller or HBA choice leaves only one remaining low profile PCIe slot for fabric.

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter	764284-B21
HPE InfiniBand EDR/Ethernet 100Gb 1-port 840QSFP28 Adapter	825110-B21
HPE InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter	825111-B21

Intel Omni-Path Adapters

HPE 100Gb 1-port OP101 QSFP28 x16 PCIe Gen3 with Intel® Omni-Path Architecture Adapter	829335-B21
HPE 100Gb 1-port OP101 QSFP28 x8 PCIe Gen3 with Intel® Omni-Path Architecture Adapter	829334-B21

Ethernet Options

HPE Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
HPE Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21
HPE Ethernet 10Gb 2-port 561T Adapter	716591-B21
HPE Ethernet 10Gb 2-port 562SFP+ Adapter	727055-B21
HPE Ethernet 1Gb 4-port 366T Adapter	811546-B21
HPE Ethernet 10Gb 2-port 546SFP+ Adapter	779793-B21
HP XL170r/190r Dedicated NIC IM Board Kit	798192-B21
HPE Ethernet 1Gb 4-port 331T Adapter	647594-B21
HP Ethernet 10Gb 2-port 572SFP+ Adapter	789003-B21
HPE Ethernet 10Gb 2-port 530T Adapter	656596-B21
HPE Ethernet 1Gb 2-port 361T Adapter	652497-B21
HPE Ethernet 1Gb 2-port 332T Adapter	615732-B21

Step 12: Other supported options

HPE Trusted Platform Module 2.0 Kit	745823-B21
NOTE: HPE Trusted Platform Module 2.0 Option works with Gen9 servers with UEFI Mode not Legacy Mode.	
NOTE: HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.	
HPE 36pin Serial/USB/VGA Dongle Cord Kit	676277-B21
HPE Dual 8GB microSD Enterprise Midline USB Kit	741279-B21
HPE 32GB microSD Mainstream Flash Media Kit	700139-B21
HPE 8GB USB Enterprise Mainstream Flash Media Drive Key Kit	737953-B21

Configuration Information - Factory Integrated Models

HPE 8GB microSD Enterprise Mainstream Flash Media Kit 726116-B21

Step 13: Choose HPE Apollo 6000 Power Shelf configuration

HPE Apollo 6000 Power Shelf	<p>HP Apollo 6000 Standard Power Shelf 735131-B21</p> <p>NOTE: To determine how many power shelves are needed at a rack level (based on server and chassis configuration, please use the HPE Power Advisor as a guidance (power values may vary up to 15%).</p> <p>NOTE: Do not power one chassis from two power shelves (Power one tray from one shelf, the other tray from a second shelf.) The trays in any given chassis can only be powered from a single power shelf.</p>
Power Shelf Rails	<p>HP Apollo 6000 Power Shelf Rail Kit 765439-B21</p> <p>NOTE: This kit only supports HPE racks.</p> <p>HP Apollo 6000 Third Party Rack Power Shelf Rail Kit 775167-B21</p> <p>NOTE: This kit supports some HPE Pods and some 3rd Party racks.</p>
AC Input Power Module	<p>NOTE: If Three Phase Power Module is selected, a minimum of 3 Power Supply Option Kits are needed. For full redundancy 6 Power Supply Option Kits are required</p> <p>HPE BLc7000 1 PH FIO Power Module Option 413379-B21</p> <p>NOTE: This power module is for single phase, high-line 200-240VAC applications and has six IEC-320 C20 power connectors that accept IEC C19-C20 power cables. One WW 250W C19-C20 2.0m (non-iPDU) cable is included per supported power supply. Supported power supplies are listed here.</p> <p>HP BLc7000 3 PH Intl FIO Power Modue Option 413381-B21</p> <p>NOTE: This power module is for three phase, high-line 200-240VAC international applications and has two 3.05m (10 ft) power cables with IEC-309 200/346 V - 240/415 V, 5-Pin, 6h, 16A connectors.</p> <p>HP BLc7000 3 PH NA/JP FIO Power Module Option 413380-B21</p> <p>NOTE: This power module is for three phase, high-line 200-208VAC North America and Japan applications and has two 3.05m (10 ft) power cables with NEMA L15-30p connectors.</p>
Choose Power Supplies	<p>HPE HVDC 1PH AC Power Module BLc FIO Option 753623-B21</p> <p>NOTE: Mixing of Power Supplies is not supported on HPE Apollo 6000 Power Shelf.</p> <p>NOTE: If Three-Phase Power is selected, a minimum of 3 Power Supply Option Kits are needed. For full redundancy, 6 Power Supply Option Kits are required.</p> <p>HPE 2650W Performance Platinum Hot Plug Power Supply Kit 733459-B21</p> <p>HPE 2650W Performance Universal Hot Plug Power Supply Kit 753618-B21</p> <p>NOTE: The HPE power supplies meet multiple Energy Efficiency Initiatives: 94% Climate Savers Computing, PLATINUM and ECOS Consulting 80 Plus Platinum.</p>

Additional Options

Choose Output Power Cables

NOTE: Each power shelf can support up to twelve 12V DC cables

NOTE: Depending on the number of chassis to be supported, the cable length varies.

NOTE: For 300W GPU (ex: NVIDIA Tesla K80), use four (4) cables per power tray.

NOTE: For 200-275W GPU (ex: NVIDIA Tesla M40, K40, AMD S9150,) use three (3) cables per accelerator tray

HPE Apollo d6500 Power Shelf 863.3mm Power Cable Kit 857488-B21

HPE Apollo d6500 Power Shelf 984mm Power Cable Kit 857492-B21

HPE Apollo d6500 Power Shelf 1168mm Power Cable Kit 857495-B21

Choose HPE Power Cords

HPE 2.0m 250V 16A C19-C20 WW Single IPD Enabled Jumper Cord TK738A

HPE 2.0m 250V 16A C19-C20 WW 3PC Kit IPD Enabled Jumper Cord TK739A

HPE 2.5m 250V 16A C19-C20 WW Single IPD Enabled Jumper Cord TK740A

HPE 2.5m 250V 16A C19-C20 WW 3PC Kit IPD Enabled Jumper Cord TK741A

HPE 3.0m 250V 16A C19-C20 WW Single IPD Enabled Jumper Cord TK742A

HPE 3.0m 250V 16A C19-C20 WW 3PC Kit IPD Enabled Jumper Cord TK743A

HPE 1.37m 250V 16A C19-C20 WW Single IPD Enabled Jumper Cord TK744A

HPE 1.37m 250V 16A C19-C20 WW 3PC Kit IPD Enabled Jumper Cord TK745A

HP SAFDGRID-SAFDGRID 277V 15Amp DC 0.76m Jumper Cord J6W98A

HP SAFDGRID-SAFDGRID 277V 15Amp DC 1.37m Jumper Cord J6W99A

HP SAFDGRID-SAFDGRID 277V 15Amp DC 2.0m Jumper Cord J6X00A

HP SAFDGRID-LS-25 277V 15Amp AC 0.76m Jumper Cord J6X01A

HP SAFDGRID-LS-25 277V 15Amp AC 1.37m Jumper Cord J6X02A

HP SAFDGRID-LS-25 277V 15Amp AC 2.0m Jumper Cord J6X03A

HPE C19 - C20 WW 250V 16Amp Flint Gray 2.0m Jumper Cord AF574A

HPE C19 - C20 WW 250V 16Amp Flint Gray 1.20m Jumper Cord AF575A

HPE C19 - CEE-VII EU 250V 16Amp 3.6m Power Cord AF576A

HPE C19 - AS3112-3 AU/NZ 250V 15Amp 3.6m Power Cord AF577A

HPE C19 - SABS-164 ZA 250V 16Amp 3.6m Power Cord AF579A

HPE C19 - CEI-23-50 IT/CL 250V 16Amp 3.6m Power Cord AF580A

HPE C19 - IEC-309 DK/SE/AR 250V 16Amp 3.6m Power Cord AF581A

HPE C19 - IS-1293 IN/PK/BD 250V 16Amp 2.5m Power Cord AF582A

HPE C19 - ISI-32 IL 250V 16Amp 2.5m Power Cord AF583A

HPE C19 - GB-1002 CN 250V 16Amp 2.5m Power Cord AF584A

HPE C19 - CNS-690 TW 250V 16Amp 2.5m Power Cord AF585A

Additional Options

	HP C19 - Nema 5-15P TH-PH 125V 15Amp 3.6m Power Cord	AF586A
	HPE C19 - NBR-14136 BR 250V 16Amp 2.5m Power Cord	AF592A
	HPE C19 - Nema L6-20P NA/JP 250V 20Amp High Voltage 3.6m Power Cord	AF593A
Security Hardware	HPE 2U Security Bezel Kit	666988-B21
HPE Advanced Power Manager	HP Advanced Power Manager Kit	741192-B21
	NOTE: Each HPE APM can connect up to 10 chassis via consolidated chassis management cable.	
	HP 4M 20 Pin Consolidated Management Cable	762048-B21
	NOTE: 1 cable per chassis.	

Memory

Memory Population Guidelines

- <http://h18000.www1.hpe.com/products/QuickSpecs/14225/14225.html>

Technical Specifications

HPE Apollo 6500 / HPE Apollo 6500 Chassis and two HPE ProLiant XL270d Accelerator trays	Dimensions	Height	6.97 in(17.70cm)
		Width	17.64in(44.81cm)
		Depth	37.79in(96.00cm)
	Shipping Dimensions	Height	11.72in (29.7cm)
		Width	23.51in (59.7cm)
		Depth	42.80in (108.7cm)
	Chassis Weight	Empty	32.89 lb (14.92 kg)
		Approximate	Approximate 161.42 lb (73.22 kg)
	Max Chassis Weight	Operating	50° to 95° F (10° to 35° C)
		Non-Operating	-22° to 140° F (-30° to 60° C)
Temperature Range	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.	
	Non-Operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.	
Relative Humidity	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.	
	Non-Operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.	
<p>NOTE: Operating temperature has an altitude derating of 1.8° F (1° C) per 1,000 ft (304.8 m). No direct sunlight. Upper operating limit is 10,000 ft (3,048 m) or 70Kpa/10.1 psia. Upper non-operating limit is 30,000 ft (9,144 m) or 30.3 KPa/4.4 psia. Storage maximum humidity of 95% is based on a maximum temperature of 113° F (45° C). Altitude maximum for storage is 70 KPa.</p>			
Acoustic Noise	<p>Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).</p>		
		Idle	
	LWAd	not determined at time of publish	
	LpAm	not determined at time of publish	
		Operating	
	LWAd	not determined at time of publish	
LpAm	not determined at time of publish		
Environmental-friendly Products and Approach	End-of-life Management and Recycling	<p>Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.</p>	

Summary of Changes

Date	Version History	Action	Description of Change
24-Aug-2017	From version 4 to 5	Updated	Update SKUs descriptions
16-Jul-2017	From version 3 to 4	Changed	Correct information on diagrams
13-Jan-2017	From version 2 to 3	Updated	Update information in the Overview section and in the Configuration Information - Factory Integrated Models
4-Nov-2016	From version 1 to 2	Updated	Remove some HDD SKUs
15-Aug-2016	Version 1	Created	Create QuickSpecs for HPE Apollo 6500



Sign up for updates

© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

Linux is a registered trademark of Linus Torvalds.

SUSE is a registered trademark of Suse. Ubuntu and Canonical are registered trademarks of Canonical Ltd.

Red Hat is a trademark of Red Hat, Inc. in the U.S. and other countries.

VMware is a registered trademark of VMware, Inc. in the United States and/or other jurisdictions.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

c05069270- 15602 – North America – V5- 24- August-2017

