


### Overview

#### HPE Flex-10 10Gb 2-port 530M Adapter

The HPE 530M is a 2-port 10GbE Mezzanine adapter, featuring the next generation of 10 Gb Ethernet offering in a single chip solution on a mezzanine form factor that further reduces power requirements for 2 ports of 10 Gb Ethernet. It is designed for use with HPE BladeSystem c-Class Gen8 blade server platform's type A and Type B mezzanine slots.

It provides full duplex high performance Ethernet connectivity with support for HPE Virtual Connect Flex-10 blade interconnect and Network Partitioning (NPAR) technology, allowing each 10GbE port to be divided into four physical NICs and optimize bandwidth management for virtualized servers. The HPE Flex-10 530M adapter, in conjunction with HPE Virtual Connect Flex-10 and NPAR technology, helps to extend the benefits of virtualization beyond the server and into the rest of the infrastructure.

The HPE 530M supports enterprise class features such as VLAN tagging, adaptive interrupt coalescing, MSI-X, NIC teaming (bonding), Tunnel Offloads (NVGRE VXLAN), Receive Side Scaling (RSS), jumbo frames and PXE boot. It also supports virtualization features such as SR-IOV (Windows, Linux, VMware), VMware NetQueue and Microsoft VMQ.

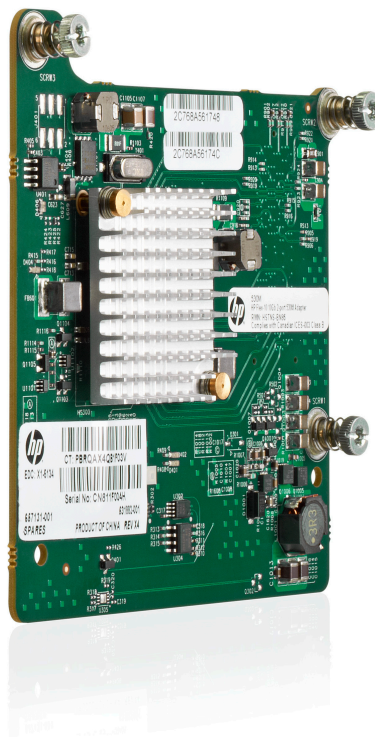

HPE Flex-10 10Gb 2-port 530M Adapter

## Platform Information

### Models

HP Flex-10 10Gb 2-port 530M Adapter

631884-B21

**NOTE:** This adapter requires a minimum of 2 GB of server memory.

**NOTE:** This adapter supports linking at 1000 Mbps or 10000 Mbps when not connected to a Flex-10 device.

**NOTE:** This adapter will only support 1000 Mbps when connected to a 1 Gb Ethernet interconnect.

---

<b>Kit Contents</b>	HPE Flex-10 10Gb 2-port 530M Adapter Quick install card Product warranty statement
---------------------	--

---

<b>Compatibility - Supported Servers</b>	HPE Server Support HPE ProLiant BL420c Gen8 HPE ProLiant BL460c Gen8 HPE ProLiant BL465c Gen8 HPE ProLiant BL660c Gen8
--	--

---

<b>Compatibility - Supported Interconnect Modules</b>	HPE Virtual Connect Flex-10/10D Module for c-Class BladeSystem HPE Virtual Connect Flex-10/10D Module Enterprise Edition for BLc7000 Option HPE Virtual Connect Flex-10 10Gb Ethernet Module for c-Class BladeSystem HPE Virtual Connect Flex-10 Ethernet Module Enterprise Edition for BLc7000 Option HPE 6120XG Blade Switch HPE 6120G/XG Blade Switch HPE 6125XLG Ethernet Blade Switch HPE 6125XLG Ethernet Blade Switch with TAA HPE 6125G/XG Ethernet Blade Switch HPE 6125G/XG Ethernet Blade Switch with TAA HPE 6125G Ethernet Blade Switch HPE 6125G Ethernet Blade Switch with TAA HPE 6127XLG Ethernet Blade Switch Cisco Catalyst 3120G Blade Switch for HPE Cisco Catalyst 3120X Blade Switch for HPE Cisco Catalyst 3020 Blade Switch HPE 10GbE Pass Thru Module HPE 1GbE Pass Thru Module <b>NOTE:</b> 10GbE connectivity is supported in all HPE Virtual Connect Flex-10 Ethernet, HPE 6120XG, HPE 6125XG series switches and HPE 10GbE Pass-Thru modules. All other supported interconnects and switches are limited to 1GbE per connection for Ethernet-only traffic.
---	--

---

## Standard Features

### At a Glance Features

- The HPE 530M is a Type A mezzanine adapter (works in Type A and Type B mezzanine slots)
- Dual-port Flex-10 10GbE Type A adapter for HPE BladeSystem c-Class Gen8 blade servers
- Hardware acceleration and offloads for stateless TCP/IP, TCP Offload Engine (TOE)
- Industry-leading throughput and latency performance
- Up to 40Gb/s bi-directional near line rate throughput
- Improved small packet performance
- Tunnel Offload support for NVGRE and VXLAN
- Integrated PHY and MAC
- Support for Preboot eXecution Environment (PXE)
- Optimized for virtual server environments with support for HPE Flex-10 Technology, Network Partitioning (NPAR) and Single-Root I/O Virtualization (SR-IOV) User configurable bandwidth settings when combined with the 10Gb Flex-10 Virtual Connect module. From 100Mb/s to 10Gb/s on up to four "Physical Function" NICs per port, in increments of 100Mb/s for NIC. The combined bandwidth of NICs cannot exceed port bandwidth i.e. 10 Gb.
- Support for SR-IOV
- The HPE 530M adapter is compatible with Type A and B mezzanine slots for greater deployment versatility

### Virtual Connect Flex-10

Evolve 10 Gb at your own speed when paired with the HPE Virtual Connect Flex-10 10 Gb Ethernet Modules. Take advantage of four Flex Nics, which are PCI Physical Function devices that are OS/ Hypervisor independent.

Server ROM recognizes them as individual NICs.

Speeds can be set per NIC from 100 Mb to 10 Gbs in 100 Mb increments.

Three fold increase in number of network connections per port.

Up to four physical function NICs per port.

Ideal for virtualized server environment, especially for dedicated bandwidth applications like virtual machine migration from one physical server to another physical server.

### Throughput-Theoretical Bandwidth

This adapter delivers 20 Gb/s bi-directional Ethernet transfer rate per port (40 Gb/s per adapter), providing the network performance needed to improve response times and alleviate bottlenecks.

### 802.1p QoS Tagging

IEEE quality of service (QoS) 802.1p tagging allows the adapter to mark or tag frames with a priority level across a QoS-aware network for improved traffic flow.

### 802.1Q VLANs

IEEE 802.1Q virtual local area network (VLAN) protocol allows each physical port of this adapter to be separated into multiple virtual NICs for added network segmentation and enhanced security and performance. VLANs increase security by isolating traffic between users. Limiting the broadcast traffic to within the same VLAN domain also improves performance.

### HPE Sea Of Sensors

Support for the HPE Sea of Sensors which is a collection of 32 sensors that automatically track thermal activity - heat - across the server. When temperatures get too high, sensors can kick on fans and make other adjustments

## Standard Features

to reduce energy usage. What makes it better is the upgrade from all six fans kicking on at one time to a new system where only one kicks on - the one in proximity of the area that started heating up - thus reducing the amount of energy used for cooling.

---

<b>Jumbo Frames</b>	This adapter supports Jumbo Frames (also known as extended frames), permitting up to a 9,000 byte (KB) transmission unit (MTU) when running Ethernet I/O traffic. This is over five times the size of a standard 1500-byte Ethernet frame. With Jumbo Frames, networks can achieve higher throughput performance and greater CPU utilization. These attributes are particularly useful for database transfer and tape backup operations.
<b>Management Support</b>	This adapter ships with agents that can be managed from HPE Systems Insight Manager or other management application that support SNMP.
<b>Message Signaled Interrupt (Extended) (MSI-X)</b>	Message Signaled Interrupt (Extended) provides performance benefits for multi-core servers by load balancing interrupts between CPUs/cores.
<b>Network Adapter Teaming</b>	This adapter support for NIC teaming helps IT administrators increase network fault tolerance and increased network bandwidth, the team of adapters can work together as a single virtual adapter, providing support for several different types of teaming enabling IT administrators to optimize availability, improve performance and help reduce costs.
<b>Network Partitioning (NPAR)</b>	This adapter supports Network Partitioning (NPAR) allowing administrators to configure a 10 Gb port as four separate partitions or physical functions. Each PCI function is associated with a different virtual NIC. To the OS and the network, each physical function appears as a separate NIC port.
<b>Optimized for Virtualization</b>	I/O Virtualization support for VMware NetQueue and Microsoft VMQ helps meet the performance demands of consolidated virtual workloads.
<b>Preboot eXecution Environment (PXE)</b>	Support for PXE enables automatic deployment of computing resources remotely from anywhere. It allows a new or existing server to boot over the network and download software, including the operating system, from a management/ deployment server at another location on the network. Additionally, PXE enables decentralized software distribution and remote troubleshooting and repairs.
<b>Single-Root I/O Virtualization</b>	Single-Root I/O Virtualization (SR-IOV) provides a mechanism to bypass the host system hypervisor in virtual environments providing near metal performance and server efficiency. SR-IOV provides mechanism to create multiple Virtual Functions (VFs) to share single PCIe resources. The device is capable of SR-IOV, and requires Server BIOS support, controller firmware, and OS support.
<b>TCP/UDP/IP</b>	For overall improved system response, this adapter supports standard TCP/IP offloading techniques including:

---

---

## Standard Features

TCP/IP, UDP checksum offload (TCO) moves the TCP and IP checksum offloading from the CPU to the network adapter. Large send offload (LSO) or TCP segmentation offload (TSO) allows the TCP segmentation to be handled by the adapter rather than the CPU.

---

**TOE** TCP/IP Offload Engine (TOE) shifts the processing of data in the TCP protocol stack from the server CPU to the adapter's processor, freeing server CPU cycles for other operations.

---

**Tunnel Offload** Minimize the impact of overlay networking on host performance with tunnel offload support for VXLAN and NVGRE. By offloading packet processing to adapters, customers can use overlay networking to increase VM migration flexibility and virtualized overlay networks with minimal impact to performance. HPE Tunnel Offloading increases I/O throughput, reduces CPU utilization, and lowers power consumption. Tunnel Offload supports VMware's VXLAN and Microsoft's NVGRE solutions.

---

**Warranty** Maximum: The remaining warranty of the HPE product in which it is installed (to a maximum three-year, limited warranty).  
Minimum: One year limited warranty.  
**NOTE: Additional information regarding worldwide limited warranty and technical support is available at: <http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/index.aspx#.V4e3tPkrJhE>**

---

---

## Service & Support

**Service and Support** **NOTE: This adapter is covered under HPE Support Services/ Service Contract applied to the HPE ProLiant Server or enclosure. No separate HPE Support Services# need to be purchased.**

Most HPE branded options sourced from HPE that are compatible with your product will be covered under your main product support at the same level of coverage, allowing you to upgrade freely. Additional support is required on select workload accelerators, switches, racks and UPS options 12KVA and over. Coverage of the UPS battery is not included under HPE support services; standard warranty terms and conditions apply.

---

### Warranty and Support Services

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS options 12KVA and over. Coverage of the UPS battery is not included under TS support services; standard warranty terms and conditions apply.

---

### Protect your business beyond warranty with HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HPE to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support you need for your IT and business.  
Protect your product, beyond warranty.

---

### Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements. Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services. The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

---

### For more information

Visit the Hewlett Packard Enterprise Service and Support [website](#).

---

## Technical Specifications

<b>General Specifications</b>	<b>Network Processor</b>	QLogic 57810S with integrated MAC/PHY
	<b>Data Rate</b>	Two ports, each at 20 Gb/s bi-directional; 40 Gb/s aggregate bi-directional theoretical bandwidth.
	<b>Onboard Memory</b>	PCI Express 2.0 (Gen 2) x8
	<b>Form Factor</b>	Type A mezzanine adapter (works in Type A and Type B mezzanine slots)
	<b>IEEE Compliance</b>	802.3, 802.3ab, 802.3u, 802.3x, 802.3ad, 802.3p, 802.1q, 802.3ae, 802.3ap

<b>Power and Environmental Specifications</b>	<b>Power</b>	<12W maximum
	<b>Temperature - Operating</b>	0° to 55°C (32° to 131°F)
	<b>Humidity - Operating</b>	10% to 90% non-condensing
	<b>Emissions Classification</b>	FCC Class A
	<b>Agency Approvals</b>	USA: FCC Part 15 Class A Canada: ICES-003, Issue 4 Japan: VCCI V3 (2010.04) Class A International: EN55022:2006 + A1:2007 Class A International: EN55024:1998+A1:2011+A2; EN61000-3-2:2006, EN61000-3-3:2008 Taiwan: BSMI, CNS13438 (2006) Class A Australia/New Zealand (AS/NZS): EN55022:2006+A12007 class A Korea: KN22 Class A, KN24
	<b>RoHS Compliance</b>	6 of 6
	<b>Safety</b>	UL Mark (USA and Canada) CE Mark EN 60590

<b>Operating System and Virtualization Support</b>	• Microsoft Windows Server 2008 SP2 and R2 w/SP1 (x86 and x64)
	• Microsoft Windows Server 2012, 2012 R2
	• Microsoft Windows Hyper-V 2008 R2 w/SP1, 2012, 2012 R2
	• Red Hat Enterprise Linux (RHEL)# 5, 6, 7
	• SUSE Linux Enterprise Server (SLES) 11, 12
	• Solaris 10, 11
	• VMware ESXi 5.x, 6.x
	• VMware vSphere 4.1, 5.0, 5.5

**NOTE:** For more operating system support and certification information, please visit: [http://h17007.www1.hp.com/us/en/enterprise/servers/supportmatrix/redhat\\_linux.aspx#.V4e8tPkrJD8](http://h17007.www1.hp.com/us/en/enterprise/servers/supportmatrix/redhat_linux.aspx#.V4e8tPkrJD8)

### Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life **product return, trade-in, and recycling programs** in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE Directive (2012/19/EU) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the [Hewlett Packard Enterprise web site](#). These instructions may be used by recyclers and other WEEE

## Technical Specifications

treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

---



## Summary of Changes

Date	Version History	Action	Description of Change
27-Mar-2017	From Version 10 to 11	Changed	Related Options was updated.
23-Sep-2016	From Version 9 to 10	Changed	Overview, Standard Features, Related Options, and Technical Specifications sections were deleted.
		Removed	Obsolete SKUs were deleted: 647586-B21, 700741-B21, 656590-B21, 647590-B21, 700741-B21
19-Jun-2015	From Version 8 to 9	Changed	Overview, Compatibility, Standard Features, Related Options and Technical Specifications sections were updated.
28-Nov-2014	From Version 7 to 8	Changed	Compatibility, Standard Features, Related Options and Technical Specifications sections were updated.
		Added	SKUs Added on Additional c-Class BladeSystem Adapters: 700741-B21, 700748-B21. SKUs Added on HPE 10Gb interconnects: 658250-B21, 737226-B21, 658247-B21, 737220-B21
18-Apr-2014	From Version 6 to 7	Changed	Changes were made to the Service and Support Section.
01-Mar-2013	From Version 5 to 6	Changed	Cages were made to the Overview Section and the Standard Features Section.
14-Dec-2012	From Version 4 to 5	Changed	Change made in Compatibility: HPE ProLiant Server Support; changed BL to HPE.
24-Aug-2012	From Version 3 to 4	Changed	Changes were made in Compatibility section.
22-Jun-2012	From Version 2 to 3	Changed	Minor changes were made in HPE ProLiant Server Support and Supported Interconnect Modules.
09-Mar-2012	From Version 1 to 2	Changed	Minor edits were made to Dual-port 10 Gigabit Ethernet Throughput, HPE Virtual Connect Flex-10 10Gb Ethernet Module for the c-Class BladeSystem and Additional c-Class BladeSystem Adapters and HPE Sea of Sensors 3D was added.



Sign up for updates



© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

c04111538 - 14217 - Worldwide - V11 - 27-March-2017